Ryan Hota, Shubh Sharma, Arjun Maneesh Agarwal

© 2025 Ryan Hota, Shubh Sharma, Arjun Maneesh Agarwal

Text licensed under CC-by-SA-4.0

Code licensed under AGPL-3.0

This is (still!) an incomplete draft.

Please send any corrections, comments etc. to feedback_host@mailthing.com

Last updated October 06, 2025.

To someone

Table of Contents

	Table of Contents	iii
	Basic Theory	1
§1.1.	Precise Communication	1
§1.2.	The Building Blocks	1
§1.3.		
	⊕ mathematical value	
§1.4.	Variables	. 2
	* mathematical variable 2	
§1.5.	Well-Formed Expressions	. 3
	checking whether mathematical expression is well-formed	
	* well-formed mathematical expression 3	
§1.6.	Function Definitions	. 4
§1	.6.1. Using Expressions4	ļ
§1	.6.2. Some Conveniences	5
	§1.6.2.1. Where, Let	
	§1.6.2.2. Anonymous Functions	
	§1.6.2.3. Piecewise Functions	
	§1.6.2.4. Pattern Matching	
§1	1.6.3. Recursion	7
	§1.6.3.1. Termination	
	termination of recursive definition 8	
	§1.6.3.2. Induction	
	⇒ principle of mathematical induction 8	
	§1.6.3.3. Proving Termination using Induction	
§1.7.	Infix Binary Operators	10
	⊕ infix binary operator	
§1.8.	Trees	. 11
_	8.1. Examples of Trees	
§1	.8.2. Making Larger Trees from Smaller Trees	
	.8.3. Formal Definition of Trees	

		e checking whether object is tree	
8181			1
31.0.4.		structural induction for trees	+
§1.8.5.		ursion	4
5			•
§1.8.6.			4
§1.9. Why	Trees?		. 15
§1.9.1.	The Problem .		6
§1.9.2.	The Solution .		6
		abstract syntax tree	
§1.9.3.	Exercises		7
Inst	alling Haskell		23
			. 2.3
		ctions	
		perating System	
		24	
	_	s	
§2.2. Runi	ning Haskell		. 25
	•		
	•		
	-		
Basi	c Syntax		27
	•		-
33.2. varu		⊕ value	. 47
633 Varia		••••••	27
y y . y . v alic		variable	. 47
		λ double	
83.4. Tyne			. 2.8
		get Types	
0 2 - 1 - 2 -		≥ :type +d	-

		(A) :type	
§3.4.2	. Types of Fun	ctions	29
		λ functions with many inputs	
§3.5. W e	ell-Formed Expr	essions	29
		checking whether expression is well-formed.30	
		⇒ well-formed expression 30	
§3.6. In	fix Binary Opera	ators	31
		λ using infix operator as function 31	
		λ using function as infix operator	
§3.6.1	. Precedence .		32
		÷ right-associative	
§3.7. Lo	gic		33
§3.7.1	Truth		33
§3.7.2	Statements.		33
		λ simplest logical statements	
		λ type of <	
§3.8. Co	nditions		34
	_	λ condition on a variable	
§3.8.1	. Logical Opera	ators	35
		⇒ logical operator	
		λ not	
8	3.8.1.1. Exclusi	ive OR aka XOR	36
		⇒ XOR	
		ons	
§3.9.1	. Using Expres	ssions	36
		λ basic function definition	
		λ function definition with explicit type 37	
0	0 0	λ xor	
		niences	
3	3.9.2.1. Piecew	rise Functions	37
		λ guards	
		λ basic usage of guards	
		λ guards	
		λ otherwise	
		λ if-then-else	

	λ if-then-else example39
§3.9.2.2. Pattern	Matching
	λ exhaustive pattern matching 40
	λ pattern matching 40
	λ unused variables in pattern match 40
	wildcard
	λ using other functions in RHS 40
	λ pattern matches mixed with guards 40
	λ trivial case
	λ non-trivial case 41
§3.9.2.3. Where,	Let
	λ where
	λ let 41
§3.9.2.4. Withou	t Inputs
	Nunction definition without input variables . 42
§3.9.2.5. Anonyn	nous Functions
	λ basic anonymous function 42
	λ multi-input anonymous function 42
§3.9.3. Recursion	42
	λ factorial
	λ binomial
	λ naive fibonacci definition
3.10. Optimization	
	λ computation of naive fibonacci 43
	λ fibonacci by tail recursion 43
	λ computation of tail recursion fibonacci 44
3.11. Numerical Functio	ns
	♦ Integer and Int
	Rational
	⊕ Double
	λ Implementation of abs function
§3.11.1. Division, A Tr	ilogy
	 A division algorithm on positive integers by repeated subtraction . 49
§3.11.2. Exponentiation	on49
	$^{\lambda}$ A naive integer exponentiation algorithm 51

	A better exponentiation algorithm using d and conquer	ivide 51
§3.11.3.	gcd and lcm	52
	λ Fast GCD and LCM	52
§3.11.4.	Dealing with Characters	53
	ematical Functions	
§3.12.1.	Binary Search	55
	⊕ Hi-Lo game	55
	(A) Square root by binary search	58
§3.12.2.	Taylor Series	58
	Log defined using Taylor Approximation .	58
	λ Sin and Cos using Taylor Approximation .	59
§3.13. Exerc	rises	59
	⊕ Newton–Raphson method	60
Types	s as Sets	69
• •		
3 1020		
	empty set	
	singleton set	
	belongs	
		69
	e cartesian product	69
	e set exponent	70
§4.2. Types		70
§4.2.1.	:: is analogous to ∈ or ⊕ belongs	70
	λ declaration of x	
	λ declaration of y	
§4.2.2.	$A \to B$ is analogous to B^A or $=$ set exponent	70
5 11-1-1	λ function	
	λ another function	
8122	(A , B) is analogous to $A \times B$ or $=$ cartesia	
34.4.3.	1 type of a pair	
	λ elements of a product type	
	CICIIICII DI U DI CUUCL LI DE	/ 1

λ first component of a pair
λ second component of a pair
λ function from a product type
λ another function from a product type 72
λ function to a product type
§4.2.4. () is analogous to $=$ singleton set
à elements of unit type
§4.2.5. No intersection of Types
§ 4.2.6. No 😑 union of Types
§4.2.7. Disjoint Union of Sets
÷ disjoint union
§4.2.8. Either A B is analogous to $A \sqcup B$ or $=$ disjoint union
λ elements of an either type
1 function to an either type
1 function from an either type
another function from an either type 75
§4.2.9. The Maybe Type
λ naive reciprocal
λ reciprocal using either
λ function to a maybe type
à elements of a maybe type
λ function from a maybe type
§4.2.10. Void is analogous to {} or = empty set
34.3. Currying
§ 4.3.1. In Haskell
λ currying usage 80
λ another currying usage
§4.3.2. Understanding through Associativity
§4.3.2.1. Of →
§ 4.3.2.2. Of Function Application
§ 4.3.2.3. Operator Currying Rule
• operator currying rule
λ operator currying usage

	λ another operator currying usage 84	
§4.3.3.	Proof of the Currying Theorem	84
§4.4. Exer	rcises	86
	😑 Unital Operator	
	÷ Shelf	
	÷ Rack88	
	÷ Quandle	
	⇒ Kei	
Intr	roduction to Lists	90
	e of List	•
	ating Lists	
	Empty List	
_	Arithmetic Progression	
33.2.2.	λ arithmetic progression syntax	90
	λ non-number arithmetic progressions 91	
Sea Fun	ctions on Lists	01
	List Comprehension	
§5.3.2.	Cons or (:)	92
	λ pattern matching lists	
§5.3.3.		92
	λ length of list	
§5.3.4.	Concatenate or (++)	93
	λ concatenation of lists	
§5.3.5.	Head and Tail	93
	λ head of list	
	λ tail of list94	
	λ uncons of list	
§5.3.6.	Take and Drop	94
	λ take from list	
	λ drop from list95	
§5.3.7.	(!!)	96
	List → Bool	
	.3.8.1. Elem	
33	λ elem 07	

§5.3.8.2	Generalized Logical Operators	••• >1
	λ and97	
	λ or	
.4. Strings.		98
.5. Structura	ıl Induction for Lists	100
	structural induction for lists	
.6. Sorting.		101
	λ sort103	
7. Optimiza	tion	104
	λ naive reverse104	
	λ optimized reverse	
	λ naive splitAt	
	λ optimized splitAt105	
9. Dark Ma	gic	
.9. Dark Ma §5.9.1. Exe	rcises	108
.9. Dark Ma §5.9.1. Exe Polymor	phism and Higher Order Functions	108
§5.9.1. Exe Polymor	rcises	108
9. Dark Mag §5.9.1. Exe Polymor 1. Polymor	phism and Higher Order Functions phism	108
9. Dark Ma §5.9.1. Exe Polymor 1. Polymorp	phism and Higher Order Functions phism	108
9. Dark Ma §5.9.1. Exe Polymor 1. Polymor	phism and Higher Order Functions ohism	108
9. Dark Ma §5.9.1. Exe Polymor 1. Polymor	phism and Higher Order Functions phism	108
9. Dark Ma §5.9.1. Exe Polymor 1. Polymor	phism and Higher Order Functions phism	108
9. Dark Ma §5.9.1. Exe Polymor 1. Polymor	phism and Higher Order Functions phism	108
9. Dark Mag §5.9.1. Exe Polymor 1. Polymorp §6.1.1. Clas	phism and Higher Order Functions phism ssification has always been about shape and behvaiour anyw squaring all elements of a list and Polymorphism 116 drop 117 Behaviour 2 Types of Polymorphism 117	108 114 114 ay 114
9. Dark Mag §5.9.1. Exe Polymor 1. Polymorp §6.1.1. Class	phism and Higher Order Functions phism phism sification has always been about shape and behvaiour anyw squaring all elements of a list and Polymorphism 115 Polymorphism 116 drop Behaviour Behaviour 2 Types of Polymorphism 117	108 114 114 ay 114
9. Dark Mag §5.9.1. Exe Polymor 1. Polymorp §6.1.1. Clas	phism and Higher Order Functions phism sification has always been about shape and behvaiour anyway \$\lambda\$ squaring all elements of a list	108 114 114 ay 114
9. Dark Mag §5.9.1. Exe Polymor Polymor §6.1.1. Class	phism and Higher Order Functions phism sification has always been about shape and behvaiour anywork squaring all elements of a list	108 114 114 ay 114
9. Dark Mag §5.9.1. Exe Polymor Polymor §6.1.1. Class	phism and Higher Order Functions phism sification has always been about shape and behvaiour anyw \$\lambda\$ squaring all elements of a list \text{115}\$ \$\lambda\$ and \text{115}\$ \$\lambda\$ and \text{115}\$ \$\lambda\$ drop \text{117}\$ \$\lambda\$ Behaviour \text{117}\$ \$\lambda\$ 2 Types of Polymorphism \text{117}\$ aste of Type Classes \lambda\$ Function Extensionality \text{118}\$ \$\lambda\$ Typeclasses \text{118}\$	108 114 114 ay 114
9. Dark Mag §5.9.1. Exe Polymor 1. Polymorp §6.1.1. Class §6.1.2. A Ta	phism and Higher Order Functions phism sification has always been about shape and behvaiour anywork \$\lambda\$ squaring all elements of a list	108 114 114 ay 114 117
9. Dark Mag §5.9.1. Exe Polymor 1. Polymor §6.1.1. Class §6.1.2. A Ta	phism and Higher Order Functions Shism Sification has always been about shape and behvaiour anywork A squaring all elements of a list A and Polymorphism drop Behaviour 117 Behaviour 117 2 Types of Polymorphism 118 Typeclasses A Function Extensionality Typeclasses Typeclasses Higher Order Functions Higher Order Functions 119 rying	108 114 114 ay 114 117
9. Dark Mag § 5.9.1. Exe Polymor 1. Polymor § 6.1.1. Class § 6.1.2. A Table 1.2. Higher C § 6.2.1. Cur	phism and Higher Order Functions phism sification has always been about shape and behvaiour anywork \$\lambda\$ squaring all elements of a list	108 114 114 ay 114 117 119

			λ composition	
			λ function application function	
			λ operator precedence	
§6	.2.3.	A Shor	t Note on Type Inference	122
§ 6	.2.4.	Higher	r Order Functions on Maybe Type : A Case Study	123
			λ maybeMap124	
§ 6.3.	Exer	cise		127
	Adv	anced I	ist Operations	131
C = -			•	
§ 7.1.	List	Compre	ehensions	131
			() Defining map using pattern matching and list comprehension 131	
			Defining filter using pattern matching and listcomprehension	
			λ Defining cartesian product using patternmatching and list comprehension 132	
			λ A naive way to get pythagorean triplets 132	
			λ A mid way to get pythagorean triplets 132	
			λ The optimal way to get pythagorean triplets . 133	
			λ The merge function of mergesort 133	
			λ An implementation of mergesort 134	
			λ An implementation of Quick Sort 135	
§7.2.	Zip i	t up!		137
			λ Implementation of zip function 137	
			(A) Implementation of zipWith function 137	
			(A) The zipWith fibonacci	
§ 7.3.	Fold	ing, Sca	nning and The Gate to True Powers	141
§7	.3.1.	Origan	ni of Code!	141
			Definition of foldr	
			Definition of foldr1	
			Definition of foldl and foldl1 143	
			(A) Implementation of unfoldr 145	
			list of primes using unfoldr 146	
			(x) Space to write the definition of sublists 147	
§7	.3.2.	Nume	rical Integration	150
			λ Naive Integration	

	Naive Integration without rep computation		
	An optimalized function for n integration		
§7.3.3. Time to Sc	an		152
	🕏 Segmented Scan	156	
7.4. Excercises			157

Basic Theory

§1.1. Precise Communication

Haskell (as well as a lot of other programming languages) and Mathematics, both involve communicating an idea in a language that is precise enough for them to be understood without ambiguity.

The main difference between mathematics and haskell is who reads what we write.

When writing any form of mathematical expression, it is the expectation that it is meant to be read by humans, and convince them of some mathematical proposition.

On the other hand, haskell code is not *primarily* meant to be read by humans, but rather by machines. The computer reads haskell code, and interprets it into steps for manipulating some expression, or doing some action.

When writing mathematics, we can choose to be a bit sloppy and hand-wavy with our words, as we can rely to some degree on the imagination and pattern-sensing abilities of the reader to fill in the gaps.

However, in the context of Haskell, computers, being machines, are extremely unimaginative, and do not possess any inherent pattern-sensing abilities. Unless we spell out the details for them in excruciating detail, they are not going to understand what we want them to do.

Since in this course we are going to be writing for computers, we need to ensure that our writing is very precise, correct and generally idiot-proof. (Because, in short, computers are idiots)

In order to practice this more formal style of writing required for haskell code, the first step we can take is to know how to write our familiar mathematics more formally.

§1.2. The Building Blocks

The language of writing mathematics is fundamentally based on two things -

- Symbols: such as $0, 1, 2, 3, x, y, z, n, \alpha, \gamma, \delta, \mathbb{N}, \mathbb{Q}, \mathbb{R}, \in, <, >, f, g, h, \Rightarrow, \forall, \exists$ etc. Along with:
- Expressions: which are sentences or phrases made by chaining together these symbols, such as
 - $x^3 \cdot x^5 + x^2 + 1$
 - f(g(x,y), f(a,h(v),c), h(h(h(n))))
 - $\forall \alpha \in \mathbb{R} \,\, \exists L \in \mathbb{R} \,\, \forall \varepsilon > 0 \,\, \exists \delta > 0 \,\, \mid x \alpha \mid <\delta \Rightarrow \mid f(x) f(\alpha) \mid <\varepsilon \,\, \text{etc} \,\,$

§1.3. Values

A mathematical value is a single and specific well-defined mathematical object that is constant, i.e., does not change from scenario to scenario nor represents an arbitrary object.

The following examples should clarify further.

Examples include -

- The real number π
- The order < on \mathbb{N}
- The function of squaring a real number : $\mathbb{R} \to \mathbb{R}$

• The number d , defined as the smallest number in the set $\{n \in \mathbb{N} \mid \exists \text{ infinitely many pairs } (p,q) \text{ of prime numbers with } |p-q| \leq n\}$

Therefore we can see that relations and functions can also be values, as long as they are specific and not scenario-dependent. For example, the order < on $\mathbb N$ does not have different meanings or interpretations in different scenarios, but rather has a fixed meaning which is independent of whatever the context is.

In fact, as we see in the last example, we don't even currently know the exact value of d.

The famous "Twin Primes Conjecture" is just about whether d == 2 or not.

So, the moral of the story is that even if we don't know what the exact value is,

we can still know that it is some = mathematical value,

as it does not change from scenario to scenario and remains constant, even though it is an unknown constant.

§1.4. Variables

= mathematical variable

A mathematical variable is a symbol or chain of symbols meant to represent an arbitrary element from a set of \div mathematical values, usually as a way to show that whatever process follows is general enough so that the process can be carried out with any arbitrary value from that set.

The following examples should clarify further.

For example, consider the following function definition -

$$f: \mathbb{R} \to \mathbb{R}$$
$$f(x) := 3x + x^2$$

Here, x is a \oplus mathematical variable as it isn't any one specific \oplus mathematical value, but rather represents an arbitrary element from the set of real numbers.

Consider the following theorem -

Theorem Adding 1 to a natural number makes it bigger.

Proof Take n to be an arbitrary natural number.

We know that 1 > 0.

Adding n to both sides of the preceding inequality yields

$$n + 1 > n$$

Hence Proved!!

Here, n is a \oplus mathematical variable as it isn't any one specific \oplus mathematical value, but rather represents an arbitrary element from the set of natural numbers.

Here is another theorem -

Theorem For any $f: \mathbb{N} \to \mathbb{N}$, if f is a strictly increasing function, then f(0) < f(1)

Proof Let $f: \mathbb{N} \to \mathbb{N}$ be a strictly increasing function. Thus

$$\forall n, m \in \mathbb{N}, n < m \Rightarrow f(n) < f(m)$$

Take n to be 0 and m to be 1. Thus we get

Hence Proved!

Here, f is a \oplus mathematical variable as it isn't any one specific \oplus mathematical value, but rather represents an arbitrary element from the set of all $\mathbb{N} \to \mathbb{N}$ strictly increasing functions.

It has been used to show a certain fact that holds for any natural number.

§1.5. Well-Formed Expressions

Consider the expression -

$$xyx \Longleftrightarrow \forall \Rightarrow f(\Leftrightarrow > \vec{v})$$

It is an expression as it is a bunch of symbols arranged one after the other, but the expression is obviously meaningless.

So what distinguishes a meaningless expression from a meaningful one? Wouldn't it be nice to have a systematic way to check whether an expression is meaningful or not?

Indeed, that is what the following definition tries to achieve - a systematic method to detect whether an expression is well-structured enough to possibly convey any meaning.

🖶 checking whether mathematical expression is well-formed

It is difficult to give a direct definition of a well-formed expression.

So before giving the direct definition,

we define a formal procedure to check whether an expression is a well-formed expression or not.

The procedure is as follows -

Given an expression e,

- first check whether *e* is
 - ► a = mathematical value, or
 - ► a = mathematical variable

in which cases *e* passes the check and is a well-formed expression.

Failing that,

- check whether e is of the form $f(e_1, e_2, e_3, ..., e_n)$, where
 - *f* is a function
 - ▶ which takes *n* inputs, and
 - $e_1, e_2, e_3, ..., e_n$ are all well-formed expressions which are valid inputs to f.

And only if *e* passes this check will it be a well-formed expression.

• well-formed mathematical expression

A mathematical expression is said to be a well-formed mathematical expression if and only if it passes the formal checking procedure defined in

† checking whether mathematical expression is well-formed.

Let us use $ext{ } ext{ }$

(We will skip the check of whether something is a valid input or not, as that notion is still not very well-defined for us.)

 $x^3 \cdot x^5 + x^2 + 1$ is + applied to the inputs $x^3 \cdot x^5$ and $x^2 + 1$.

Thus we need to check that $x^3 \cdot x^5$ and $x^2 + 1$ are well-formed expressions which are valid inputs to +.

 $x^3 \cdot x^5$ is \cdot applied to the inputs x^3 and x^5 .

Thus we need to check that x^3 and x^5 are well-formed expressions.

 x^3 is ()³ applied to the input x.

Thus we need to check that x is a well-formed expression.

x is a well-formed expression, as it is a = mathematical variable.

 x^5 is ()⁵ applied to the input x.

Thus we need to check that x is a well-formed expression.

x is a well-formed expression, as it is a = mathematical variable.

 $x^2 + 1$ is + applied to the inputs x^2 and 1.

Thus we need to check that x^2 and 1 are well-formed expressions.

 x^2 is ()² applied to the input x.

Thus we need to check that x is a well-formed expression.

x is a well-formed expression, as it is a = mathematical variable.

1 is a well-formed expression, as it is a 🖶 mathematical value.

Done!

x checking whether expression is well-formed

```
Suppose a, b, c, v, f, g are \Rightarrow mathematical values.
```

Suppose x, y, n, h are \Rightarrow mathematical variables.

Check whether the expression

is well-formed or not.

§1.6. Function Definitions

Functions are a very important tool in mathematics and they form the foundations of Haskell programming.

Thus, it is very helpful to have a deeper understanding of how function definitions in mathematics work

§1.6.1. Using Expressions

In its simplest form, a function definition is made up of a left-hand side, ':=' in the middle¹, and a right-hand side.

A few examples -

 $^{^{1}}$ In order to have a clear distinction between definition and equality, we use $A \coloneqq B$ to mean "A is defined to be B", and we use $A \equiv B$ to mean "A is equal to B".

Basic Theory

• $f(x) := x^3 \cdot x^5 + x^2 + 1$

• $\operatorname{second}(a, b) := b$

•
$$\zeta(s) := \sum_{n=1}^{\infty} \frac{1}{n^s}$$

On the left we write the name of the function followed by a number of variables which represent its inputs.

In the middle we write ':=', indicating that right-hand side is the definition of the left-hand side.

On the right, we write a \oplus well-formed mathematical expression using the variables of the left-hand side, describing to how to combine and manipulate the inputs to form the output of the function.

§1.6.2. Some Conveniences

Often in the complicated definitions of some functions, the right-hand side expression can get very convoluted, so there are some conveniences which we can use to reduce this mess.

§1.6.2.1. Where, Let

Consider the definition of the famous sine function -

sine :
$$\mathbb{R} \to \mathbb{R}$$

Given an angle θ ,

Let T be a right-angled triangle, one of whose angles is θ .

Let p be the length of the perpendicular of T.

Let h be the length of the hypotenuse of T.

Then

$$sine(\theta) := \frac{p}{h}$$

Here we use the variables p and h in the right-hand side of the definition, but to get their meanings one will have to look at how they are defined beforehand in the lines beginning with "let".

We can also do the exact same thing using "where" instead of "let".

$$\begin{aligned} & \text{sine}: \mathbb{R} \to \mathbb{R} \\ & \text{sine}(\theta) \coloneqq \frac{p}{h} \\ & \text{,where} \\ & T \coloneqq \text{a right-angled triangle with one angle} == \theta \\ & p \coloneqq \text{the length of the perpendicular of } T \end{aligned}$$

Here we use the variables p and h in the right-hand side of the definition, but to get their meanings one will have to look at how they are defined after "where".

h :=the length of the hypotenuse

§1.6.2.2. Anonymous Functions

A function definition such as

$$f: \mathbb{R} \to \mathbb{R}$$

$$f(x) \coloneqq x^3 \cdot x^5 + x^2 + 1$$

for convenience, can be rewritten as -

$$(x \mapsto x^3 \cdot x^5 + x^2 + 1) : \mathbb{R} \to \mathbb{R}$$

Notice that we did not use the symbol f, which is the name of the function, which is why this style of definition is called "anonymous".

Also, we used \mapsto in place of :=

This style is particularly useful when we (for some reason) do not want name the function.

This notation can also be used when there are multiple inputs.

Consider -

$$\begin{aligned} \text{harmonicSum}: \mathbb{R}_{>0} \times \mathbb{R}_{>0} &\to \mathbb{R}_{>0} \\ \text{harmonicSum}(x,y) \coloneqq \frac{1}{x} + \frac{1}{y} \end{aligned}$$

which, for convenience, can be rewritten as -

$$\left(x,y\mapsto \frac{1}{x}+\frac{1}{y}\right):\mathbb{R}_{>0}\times\mathbb{R}_{>0}\to\mathbb{R}_{>0}$$

§1.6.2.3. Piecewise Functions

Sometimes, the expression on the right-hand side of the definition needs to depend upon some condition, and we denote that in the following way -

$$< \operatorname{expression}_1 > \; ; \; \operatorname{if} < \operatorname{condition}_1 > \\ < \operatorname{expression}_2 > \; ; \; \operatorname{if} < \operatorname{condition}_2 > \\ < \operatorname{expression}_3 > \; ; \; \operatorname{if} < \operatorname{condition}_3 > \\ \\ \cdot \\ \cdot \\ < \operatorname{expression}_n > \; ; \; \operatorname{if} < \operatorname{condition}_n > \\$$

For example, consider the following definition -

$$\operatorname{signum}: \mathbb{R} \to \mathbb{R}$$

$$\operatorname{signum}(x) \coloneqq \begin{cases} +1 \; ; \; \text{if} \; x \; > \; 0 \\ 0 \; ; \; \text{if} \; x == 0 \\ -1 \; ; \; \text{if} \; x \; < \; 0 \end{cases}$$

The "signum" of a real number tells the "sign" of the real number; whether the number is positive, zero, or negative.

§1.6.2.4. Pattern Matching

Pattern Matching is another way to write piecewise definitions which can work in certain situations.

For example, consider the last definition -

$${\rm signum}(x) \coloneqq \begin{cases} +1 \ ; \ {\rm if} \ x \ > \ 0 \\ \\ 0 \ ; \ {\rm if} \ x == 0 \\ \\ -1 \ ; \ {\rm if} \ x \ < \ 0 \end{cases}$$

which can be rewritten as -

$$\operatorname{signum}(0) \coloneqq 0$$
$$\operatorname{signum}(x) \coloneqq \frac{x}{|x|}$$

This definition relies on checking the form of the input.

If the input is of the form "0", then the output is defined to be 0.

For any other number x, the output is defined to be $\frac{x}{|x|}$

However, there might remain some confusion -

If the input is "0", then why can't we take x to be 0, and apply the second line ($\operatorname{signum}(x) := \frac{x}{|x|}$) of the definition?

To avoid this confusion, we adopt the following convention -

Given any input, we start reading from the topmost line of the function definition to the bottom-most, and we apply the first applicable definition.

So here, the first line (signum(0) := 0) will be used as the definition when the input is 0.

§1.6.3. Recursion

A function definition is recursive when the name of the function being defined appears on the right-hand side as well.

For example, consider defining the famous fibonacci function -

$$\begin{split} F:\mathbb{N} &\to \mathbb{N} \\ F(0) &\coloneqq 1 \\ F(1) &\coloneqq 1 \\ F(n) &\coloneqq F(n-1) + F(n-2) \end{split}$$

§1.6.3.1. Termination

But it might happen that a recursive definition might not give a final output for a certain input.

For example, consider the following definition -

$$f(n) \coloneqq f(n+1)$$

It is obvious that this definition does not define an actual output for, say, f(4).

However, the previous definition of F obviously defines a specific output for F(4) as follows -

$$F(4) = F(3) + F(2)$$

$$= (F(2) + F(1)) + F(2)$$

$$= ((F(1) + F(0)) + F(1)) + F(2)$$

$$= ((1 + F(0)) + F(1)) + F(2)$$

$$= ((1 + 1) + F(1)) + F(2)$$

$$= (2 + F(1)) + F(2)$$

$$= (2 + 1) + F(2)$$

$$= 3 + F(2)$$

$$= 3 + (F(1) + F(0))$$

$$= 3 + (1 + F(0))$$

$$= 3 + 2$$

$$= 5$$

termination of recursive definition

In general, a recursive definition is said to terminate on an input if and only if

it eventually gives an actual specific output for that input.

But what we cannot do this for every F(n) one by one.

What we can do instead, is use a powerful tool known as the eprinciple of mathematical induction.

§1.6.3.2. Induction

principle of mathematical induction

Suppose we have an infinite sequence of statements $\varphi_0, \varphi_1, \varphi_2, \varphi_3, \dots$ and we can prove the following 2 statements -

- φ_0 is true
- For each n>0, if φ_{n-1} is true, then φ_n is also true.

then all the statements $\varphi_0, \varphi_1, \varphi_2, \varphi_3, ...$ in the sequence are true.

The above definition should be read as follows, given a sequence of formulas:

- The first one is true.
- Any formula being true, implies that the next one in the sequence is true.

Then all of the formulas in the sequence are true. Something like a chain of dominoes falling.

x Exercise

Show that n^2 is the same as the sum of first n odd numbers using induction.

X The scenic way

(a) Prove the following theorem of Nicomachus by induction:

$$1^{3} = 1$$

$$2^{3} = 3 + 5$$

$$3^{3} = 7 + 9 + 11$$

$$4^{3} = 13 + 15 + 17 + 19$$

$$\vdots$$

(b) Use this result to prove the remarkable formula

$$1^3 + 2^3 + \dots + n^3 = (1 + 2 + \dots + n)^2$$

X There is enough information!

Given $a_0 = 100$ and $a_n = -a_{n-1} - a_{n-2}$, what is a_{2025} ?

X 2-3 Color Theorem

A k-coloring is said to exist if the regions the plane is divided off in can be colored with three colors in such a way that no two regions sharing some length of border are the same color.

- (a) A finite number of circles (possibly intersecting and touching) are drawn on a paper. Prove that a valid 2-coloring of the regions divided off by the circles exists.
- (b) A circle and a chord of that circle are drawn in a plane. Then a second circle and chord of that circle are added. Repeating this process, until there are n circles with chords drawn, prove that a valid 3-coloring of the regions in the plane divided off by the circles and chords exists.

X Square-full

Call an integer square-full if each of its prime factors occurs to a second power (at least). Prove that there are infinitely many pairs of consecutive square-fulls.

Hint: We recommend using induction. Given (a, a + 1) are square-full, can we generate another?

X Same Height?

Here is a proof by induction that all people have the same height. We prove that for any positive integer n, any group of n people all have the same height. This is clearly true for n=1. Now assume it for n, and suppose we have a group of n+1 persons, say $P_1, P_2, \cdots, P_{n+1}$. By the induction hypothesis, the n people P_1, P_2, \cdots, P_n all have the same height. Similarly the n people $P_2, P_3, \cdots, P_{n+1}$ all have the same height. Both groups of people contain P_2, P_3, \cdots, P_n , so P_1 and P_{n+1} have the same height as P_2, P_3, \cdots, P_n . Thus all of $P_1, P_2, \cdots, P_{n+1}$ have the same height. Hence by induction, for any n any group of n people have the same height. Letting n be the total number of people in the world, we conclude that all people have the same height. Is there a flaw in this argument?

x proving the principle of induction

Prove that the following statements are equivalent -

- every nonempty subset of $\mathbb N$ has a smallest element
- the = principle of mathematical induction

You can assume that < is a linear order on $\mathbb N$ with n-1 < n and such that there are no elements strictly between n-1 and n.

§1.6.3.3. Proving Termination using Induction

So let's see the 🖶 principle of mathematical induction in action, and use it to prove that

Theorem The definition of the fibonacci function F terminates for any natural number n.

Proof For each natural number n, let φ_n be the statement

"The definition of F terminates for every natural number which is $\leq n$ "

To apply the principle of mathematical induction, we need only prove the 2 requirements and we'll be done. So let's do that -

- $\langle\langle \varphi_0 \text{ is true } \rangle\rangle$ The only natural number which is ≤ 0 is 0, and F(0) := 1, so the definition terminates immediately.
- $\langle\langle$ For each n>0, if φ_{n-1} is true, then φ_n is also true. $\rangle\rangle$ Assume that φ_{n-1} is true.

Let m be an arbitrary natural number which is $\leq n$.

- $\langle\langle$ Case 1 $(m \leq 1)$ $\rangle\rangle$ F(m) := 1, so the definition terminates immediately.
- $\begin{array}{l} {} \blacktriangleright \left\langle \left\langle \right. \mathsf{Case} \, 2 \, \left(m > 1\right) \, \right. \left\langle \right\rangle \\ {} F(m) := F(m-1) + F(m-2), \\ \mathsf{and} \, \mathsf{since} \, m 1 \, \mathsf{and} \, m 2 \, \mathsf{are} \, \mathsf{both} \leq n 1, \\ {} \varphi_{n-1} \, \mathsf{tells} \, \mathsf{us} \, \mathsf{that} \, \mathsf{both} \, F(m-1) \, \mathsf{and} \, F(m-2) \, \mathsf{must} \, \mathsf{terminate}. \\ \mathsf{Thus} \, F(m) := F(m-1) + F(m-2) \, \mathsf{must} \, \mathsf{also} \, \mathsf{terminate}. \end{array}$

Hence φ_n is proved!

Hence the theorem is proved!!

§1.7. Infix Binary Operators

Usually, the name of the function is written before the inputs given to it. For example, we can see that in the expression f(x, y, z), the symbol f is written to the left of f before any of the inputs f0 f1.

However, it's not always like that. For example, take the expression

$$x + i$$

Here, the function name is +, and the inputs are x and y.

But + has been written in-between x and y, not before!

Such a function is called an infix binary operator²

infix binary operator

An infix binary operator is a *function* which takes exactly 2 inputs and whose function name is written between the 2 inputs rather than before them.

Examples include -

- + (addition)
- — (subtraction)
- × or * (multiplication)
- / (division)

§1.8. Trees

Trees are a way to structure a collection of objects.

Trees are a fundamental way to understand expressions and how haskell deals with them.

In fact, any object in Haskell is internally modelled as a tree-like structure.


§1.8.1. Examples of Trees

Here we have a tree which defines a structure on a collection of natural numbers -



The line segments are what defines the structure.

The following tree defines a structure on a collection of words from the English language -

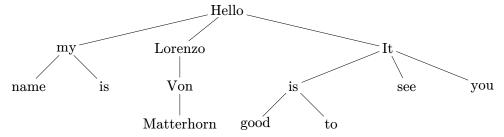


§1.8.2. Making Larger Trees from Smaller Trees

If we have an object -


89

and a few trees -

²



we can put them together into one large tree by connecting them with line segments, like so -

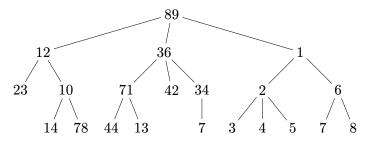


In general, if we have an object

p

and a bunch of trees

$$t_1, t_2, t_3, ..., t_{n-1}, t_n$$

, we can put them together in a larger tree, by connecting them with n line segments, like so -



We would like to define trees so that only those which are made in the above manner qualify as trees.

§1.8.3. Formal Definition of Trees


A tree over a set S defines a meaningful structure on a collection of elements from S. The examples we've seen include trees over the set \mathbb{N} , as well as a tree over the set of English words.

We will adopt a similar approach to defining trees as we did with expressions, i.e., we will provide a formal procedure to check whether a mathematical object is a tree, rather than directly defining what a tree is.

• checking whether object is tree

The formal procedure to determine whether an object is a tree over a set S is as follows -Given a mathematical object t,

- first check whether $t \in S$, in which case t passes the check, and is a tree over SFailing that,



- $p \in S$
- and each of $t_1, t_2, t_3, ..., t_{n-1},$ and t_n is a tree over S.

tree

Given a set S, a mathematical object is said to be a tree over S if and only if it passes the formal checking procedure defined in = checking whether object is tree.

Let us use this definition to check whether



is a tree over the natural numbers.

Let's start -

Of course, $12 \in \mathbb{N}$ and therefore $p \in S$.

So we are only left to check that 23 and $\left.\begin{array}{c} 10\\ \\ 14 \end{array}\right.$ are trees over the natural numbers.

 $23 \in \mathbb{N}$, so 23 is a tree over \mathbb{N} by the first check.

$$10$$
 / \searrow is of the form / \searrow , where p is 10 , $~t_1$ is 14 , and t_2 is 78 14 $_{}$ 78

Now, obviously $10 \in \mathbb{N}$, so $p \in S$.

Also, $14 \in \mathbb{N}$ and $78 \in \mathbb{N}$, so both pass by the first check.

§1.8.4. Structural Induction

In order to prove things about trees, we have a version of the 😑 principle of mathematical induction for trees -

structural induction for trees

Suppose for each tree t over a set S, we have a statement φ_t .

If we can prove the following two statements -

- For each $s \in S, \varphi_s$ is true
- For each tree T of the form t_1 t_2 t_3 \ldots t_{n-1} t_n

if φ_{t_1} , φ_{t_2} , φ_{t_3} , ... , $\varphi_{t_{n-1}}$ and φ_{t_n} are all true, then φ_T is also true.

then φ_t is true for all trees t over S.

§1.8.5. Structural Recursion

We can also define functions on trees using a certain style of recursion.

From the definition of = tree, we know that trees are

- either of the form $s \in S$
- or of the form t_1 t_2 t_3 \dots t_{n-1} t_n

So, to define any function $(f: \text{Trees over } S \to X)$, we can divide taking the input into two cases, and define the outputs respectively.

tree size

Let's use this principle to define the function

size : Trees over $S \to \mathbb{N}$

which is meant to give the number of times the elements of S appear in a tree over S.

$$\operatorname{size}(s) \coloneqq 1$$

$$\operatorname{size}\left(\underbrace{t_1 \quad t_2 \quad t_3 \quad \dots \quad t_{n-1} \quad t_n}^p\right) \coloneqq 1 + \operatorname{size}(t_1) + \operatorname{size}(t_2) + \operatorname{size}(t_3) + \dots + \operatorname{size}(t_{n-1}) + \operatorname{size}(t_n)$$

§1.8.6. Termination

Using structural induction for trees, let us prove that

Theorem The definition of the function "size" terminates on any tree.

Proof For each tree t, let φ_t be the statement

"The definition of size(t) terminates"

To apply \oplus structural induction for trees, we need only prove the 2 requirements and we'll be done. So let's do that -

- $\langle \langle \ \forall s \in S, \varphi_s \text{ is true } \rangle \rangle$ $\operatorname{size}(s) := 1$, so the definition terminates immediately.
- $\langle \langle \text{ For each tree T of the form } \dots \text{ then } \varphi_T \text{ is also true} \rangle \rangle$

Assume that each of $\varphi_{t_1}, \; \varphi_{t_2}, \; \varphi_{t_3}, ..., \; \varphi_{t_{n-1}}, \; \varphi_{t_n}$ is true.

That means that each of $\operatorname{size}(t_1), \ \operatorname{size}(t_2), \ \operatorname{size}(t_3), ..., \ \operatorname{size}(t_{n-1}), \ \operatorname{size}(t_n)$ will terminate.

Now,
$$\operatorname{size}(T) \coloneqq 1 + \operatorname{size}(t_1) + \operatorname{size}(t_2) + \operatorname{size}(t_3) + \dots + \operatorname{size}(t_{n-1}) + \operatorname{size}(t_n)$$

Thus, we can see that each term in the right-hand side terminates.

Therefore, the left-hand side "size(T)",

being defined as an addition of these terms,

must also terminate.

(since addition of finitely many terminating terms always terminates)

Hence φ_T is proved!

Hence the theorem is proved!!

x tree depth

Fix a set S.

depth(s) := 1

$$\operatorname{depth}\left(\underbrace{t_1 \quad t_2 \quad t_3 \ \dots \ t_{n-1}}^{p} t_n\right) \coloneqq 1 + \max_{1 \leq i \leq n} \{\operatorname{depth}(t_i)\}$$

- 1. Prove that the definition of the function "depth" terminates on any tree over S.
- 2. Prove that for any tree t over the set S,

$$depth(t) \leq size(t)$$

3. When is depth(t) == size(t)?

X Exercise

This exercise is optional as it can be difficult, but it can be quite illuminating to understand the solution. So even if you don't solve it, you should ask for a solution from someone.

Using the = principle of mathematical induction,

prove = structural induction for trees.

§1.9. Why Trees?

But why care so much about trees anyway? Well, that is mainly due to the previously mentioned fact - "In fact, any object in Haskell is internally modelled as a tree-like structure."

But why would Haskell choose to do that? There is a good reason, as we are going to see.

§1.9.1. The Problem

Suppose we are given that x=5 and then asked to find out the value of the expression $x^3 \cdot x^5 + x^2 + 1$. How can we do this?

Well, since we know that $x^3 \cdot x^5 + x^2 + 1$ is the function + applied to the inputs $x^3 \cdot x^5$ and $x^2 + 1$, we can first find out the values of these inputs and then apply + on them!

Similarly, as long as we can put an expression in the form $f(x_1, x_2, x_3, ..., x_{n-1}, x_n)$, we can find out its value by finding out the values of its inputs and then applying f on these values.

So, for dumb Haskell to do this (figure out the values of expressions, which is quite an important ability), a vital requirement is to be able to easily put expressions in the form $f(x_1, x_2, x_3, ..., x_{n-1}, x_n)$.

But this can be quite difficult - In $x^3 \cdot x^5 + x^2 + 1$, it takes our human eyes and reasoning to figure it out fully, and for long, complicated expressions it will be even harder.

§1.9.2. The Solution


One way to make this easier to represent the expression in the form of a tree -

For example, if we represent $x^3 \cdot x^5 + x^2 + 1$ as


$$x^3 \cdot x^5 \quad x^2 + 1$$

, it becomes obvious what the function is and what the inputs are to which it is applied.


In general, we can represent the expression $f(x_1, x_2, x_3, ..., x_{n-1}, x_n)$ as




But why stop there, we can represent the sub-expressions (such as $x^3 \cdot x^5$ and $x^2 + 1$) as trees too -



and their sub-expressions can be represented as trees as well -



This is known as the as an Abstract Syntax Tree, and this is (approximately) how Haskell stores expressions, i.e., how it stores everything.




The abstract syntax tree of a well-formed expression is defined by applying the "function" **AST** to the expression.

The "function" AST is defined as follows -

 $AST : Expressions \rightarrow Trees over values and variables$

AST(v) := v, if v is a value or variable

$${\rm AST}(f(x_1, x_2, x_3, ..., x_{n-1}, x_n)) \coloneqq$$



§1.9.3. Exercises

All the following exercises are optional, as they are not the most relevant for concept-building. They are just a collection of problems we found interesting and arguably solvable with the theory of this chapter. Have fun!³

X Turbo The Snail(IMO 2024, P5)

Turbo the snail is in the top row of a grid with $s \geq 4$ rows and s-1 columns and wants to get to the bottom row. However, there are s-2 hidden monsters, one in every row except the first and last, with no two monsters in the same column. Turbo makes a series of attempts to go from the first row to the last row. On each attempt, he chooses to start on any cell in the first row, then repeatedly moves to an orthogonal neighbor. (He is allowed to return to a previously visited cell.) If Turbo reaches a cell with a monster, his attempt ends and he is transported back to the first row to start a new attempt. The monsters do not move between attempts, and Turbo remembers whether or not each cell he has visited contains a monster. If he reaches any cell in the last row, his attempt ends and Turbo wins.

Find the smallest integer n such that Turbo has a strategy which guarantees being able to reach the bottom row in at most n attempts, regardless of how the monsters are placed.

³Atleast one author is of the opinion:

All questions are clearly compulsory and kids must write them on paper using quill made from flamingo feathers to hope to understand anything this chapter teaches.

X Points in Triangle

Inside a right triangle a finite set of points is given. Prove that these points can be connected by a broken line such that the sum of the squares of the lengths in the broken line is less than or equal to the square of the length of the hypotenuse of the given triangle.

X Joining Points(IOI 2006, 6)

A number of red points and blue points are drawn in a unit square with the following properties:

- The top-left and top-right corners are red points.
- The bottom-left and bottom-right corners are blue points.
- No three points are collinear.

Prove it is possible to draw red segments between red points and blue segments between blue points in such a way that: all the red points are connected to each other, all the blue points are connected to each other, and no two segments cross.

As a bonus, try to think of a recipe or a set of instructions one could follow to do so.

Hint: Try using the 'trick' you discovered in X Points in Triangle.

X Usmions(USA TST 2015, simplified)

A physicist encounters 2015 atoms called usamons. Each usamon either has one electron or zero electrons, and the physicist can't tell the difference. The physicist's only tool is a diode. The physicist may connect the diode from any usamon A to any other usamon B. (This connection is directed.) When she does so, if usamon A has an electron and usamon B does not, then the electron jumps from A to B. In any other case, nothing happens. In addition, the physicist cannot tell whether an electron jumps during any given step. The physicist's goal is to arrange the usamons in a line such that all the charged usamons are to the left of the un-charged usamons, regardless of the number of charged usamons. Is there any series of diode usage that makes this possible?

X Battery

- (a) There are 2n + 1(n > 2) batteries. We don't know which batteries are good and which are bad but we know that the number of good batteries is greater by 1 than the number of bad batteries. A lamp uses two batteries, and it works only if both of them are good. What is the least number of attempts sufficient to make the lamp work?
- (b) The same problem but the total number of batteries is 2n(n > 2) and the numbers of good and bad batteries are equal.

X Seven Tries (Russia 2000)

Tanya chose a natural number $X \leq 100$, and Sasha is trying to guess this number. He can select two natural numbers M and N less than 100 and ask about $\gcd(X+M,N)$. Show that Sasha can determine Tanya's number with at most seven questions.

Note: We know of atleast 5 ways to solve this. Some can be generalized to any number k other than 100, with $\lceil \log_2(k) \rceil$ many tries, other are a bit less general. We hope you can find atleast 2.

The best (trollest) codeforces question ever! (Codeforces 1028B)

Let s(k) be sum of digits in decimal representation of positive integer k. Given two integers $1 \le m, n \le 1129$ and n, find two integers $1 \le a, b \le 10^{2230}$ such that

- $s(a) \geq n$
- $s(b) \geq n$
- $s(a+b) \leq m$

For Example

Input1:65

Output1:67

Input2:816

Output2:35 53

X Rope

Given a $r \times c$ grid with $0 \le n \le r * c$ painted cells, we have to arrange ropes to cover the grid. Here are the rules through example:

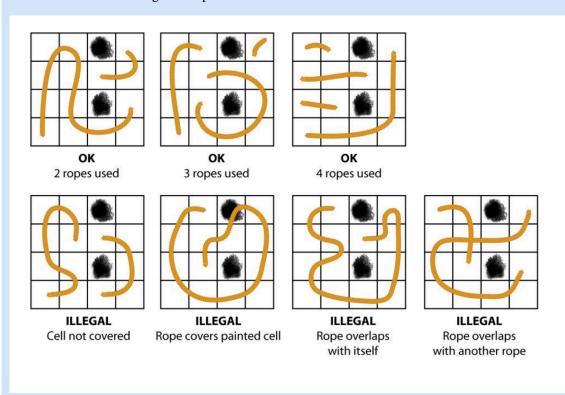


Figure out an algorithm/recipe to covering the grid using n + 1 ropes legally.

Hint: Try to first do the n = 0 case. Then r = 1 case, with arbitrary n. Does this help?

x n composite

Given N, find N consecutive integers that are all composite numbers.

X Divided by 5^n


Prove that for every positive integer n, there exists an n-digit number divisible by 5^n , all of whose digits are odd.

X This was rated 2100? (Codeforces 763B)

One of Timofey's birthday presents is a colourbook in the shape of an infinite plane. On the plane, there are n rectangles with sides parallel to the coordinate axes. All sides of the rectangles have odd lengths. The rectangles do not intersect, but they can touch each other.

Your task is, given the coordinates of the rectangles, to help Timofey color the rectangles using four different colors such that any two rectangles that touch each other by a side have different colors, or determine that it is impossible.

For example,

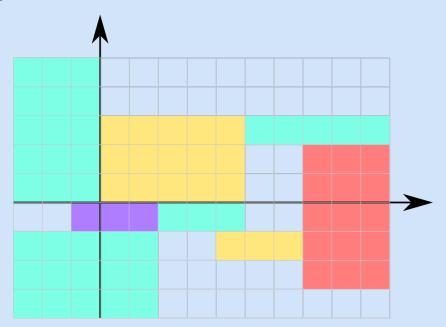

is a valid filling. Make an algorithm/recipe to fulfill this task.

PS: You will feel a little dumb once you solve it.

x Seating

Wupendra Wulkarni storms into the exam room. He glares at the students.

"Of course you all sat like this on purpose. Don't act innocent. I know you planned to copy off each other. Do you all think I'm stupid? Hah! I've seen smarter chairs.

Well, guess what, darlings? I'm not letting that happen. Not on my watch.

Here's your punishment - uh, I mean, assignment:

You're all sitting in a nice little grid, let's say n rows and m columns. I'll number you from 1 to $n \cdot m$, row by row. That means the poor soul in row i, column j is student number $(i-1) \cdot m + j$. Got it?

Now, you better rearrange yourselves so that none of you little cheaters ends up next to the same neighbor again. Side-by-side, up-down—any adjacent loser you were plotting with in the original grid? Yeah, stay away from them."

Your task is this: Find a new seating chart (in general an algorithm/recipie), using n rows and m columns, using every number from 1 to $n \cdot m$ such that no two students who were neighbors in the original grid are neighbors again.

And if you think it's impossible, then prove it as Wupendra won't satisfy for anything less.

X Yet some more Fibonacci Identity

Fibonacci sequence is defined as $F_0 = 0$, $F_1 = 1$ and $F_n = F_{n-1} + F_{n-2}$.

(i) Prove that

$$\sum_{n=2}^{\infty} \arctan\left(\frac{(-1)^n}{F_2 n}\right) = \frac{1}{2}\arctan\left(\frac{1}{2}\right)$$

Hint: What is this problem doing on this list of problems?

- (ii) Every natural number can be expressed uniquely as a sum of Fibonacci numbers where the Fibonacci numbers used in the sum are all distinct, and no two consecutive Fibonacci numbers appear.
- (iii) Evaluate

$$\sum_{i=2}^{\infty} \frac{1}{F_{i-1}F_{i+1}}$$

X Round Robin

A group of n people play a round-robin chess tournament. Each match ends in either a win or a lost. Show that it is possible to label the players $P_1, P_2, P_3, \cdots, P_n$ in such a way that P_1 defeated P_2, P_2 defeated P_3, \ldots, P_{n-1} defeated P_n .

X Stamps

- (i) The country of Philatelia is founded for the pure benefit of stamp-lovers. Each year the country introduces a new stamp, for a denomination (in cents) that cannot be achieved by any combination of older stamps. Show that at some point the country will be forced to introduce a 1-cent stamp, and the fun will have to end.
- (ii) Two officers in Philatelia decide to play a game. They alternate in issuing stamps. The first officer to name 1 or a sum of some previous numbers (possibly with repetition) loses. Determine which player has the winning strategy.

X Seven Dwarfs

The Seven Dwarfs are sitting around the breakfast table; Snow White has just poured them some milk. Before they drink, they perform a little ritual. First, Dwarf 1 distributes all the milk in his mug equally among his brothers' mugs (leaving none for himself). Then Dwarf 2 does the same, then Dwarf 3, 4, etc., finishing with Dwarf 7. At the end of the process, the amount of milk in each dwarf's mug is the same as at the beginning! What was the ratio of milt they started with?

X Coin Flip Scores

A gambling graduate student tosses a fair coin and scores one point for each head that turns up and two points for each tail. Prove that the probability of the student scoring exactly n points at some time in a sequence of n tosses is $\frac{2+(-\frac{1}{2})^n}{3}$

X Coins (IMO 2010 P5)

Each of the six boxes B_1 , B_2 , B_3 , B_4 , B_5 , B_6 initially contains one coin. The following operations are allowed

- (1) Choose a non-empty box B_j , $1 \leq j \leq 5$, remove one coin from B_j and add two coins to B_{j+1} ;
- (2) Choose a non-empty box B_k , $1 \le k \le 4$, remove one coin from B_k and swap the contents (maybe empty) of the boxes B_{k+1} and B_{k+2} .

Determine if there exists a finite sequence of operations of the allowed types, such that the five boxes B_1 , B_2 , B_3 , B_4 , B_5 become empty, while box B_6 contains exactly $2010^{2010^{2010}}$ coins.

Installing Haskell

§2.1. Installation

§ 2.1.1. General Instructions

- 1. This may take a while, so make sure that you have enough time on your hands.
- 2. Make sure that your device has enough charge to last you the entire installation process.
- 3. Make sure that you have a strong and stable internet connection.
- 4. Make sure that any antivirus(es) that you have on your device is fully turned off during the installation process. You can turn it back on immediately afterwards.
- 5. Make sure to follow the following instructions IN ORDER.

 Make sure to COMPLETE EACH STEP fully BEFORE moving on to the NEXT STEP.

§ 2.1.2. Choose your Operating System

§2.1.2.1. Linux

- 1. Install Haskell
 - 1. Read the general instructions very carefully, and ensure that you have complied with all the requirements properly.
 - 2. Close all open windows and running processes other than wherever you are reading this.
 - 3. Open the directory Haskell/installation/Linux in your text editor. (We have more support for Visual Studio Code, but any text editor should do)
 - 4. Type in the commands in the installHaskell file into the terminal.
 - 5. This may take a while.
 - 6. You will know installation is complete at the point when it says Press any key to exit.
 - 7. Restart (shut down and open again) your device.
- 2. Install HaskellSupport
 - 1. Read the general instructions very carefully, and ensure that you have complied with all the requirements properly.
 - 2. Close all open windows and running processes other than wherever you are reading this.
 - 3. Open the directory Haskell/installation/Linux in your text editor. (We have more support for Visual Studio Code, but any text editor should do)

- 4. Type in the commands in the installHaskellSupport file in the terminal.
- 5. This may take a while.
- 6. You will know installation is complete at the point when it says Press any key to Exit.
- 7. Restart (shut down and open again) your device.

§2.1.2.2. MacOS

1. Install Haskell

- 1. Read the general instructions very carefully, and ensure that you have complied with all the requirements properly.
- 2. Close all open windows and running processes other than wherever you are reading this.
- 3. Open the folder Haskell in Finder.
- 4. Open the folder installation in Finder.
- 5. Right click on the folder MacOS in Finder, and select Open in Terminal.
- 6. Type in chmod +x installHaskell.command in the terminal.
- 7. Close the terminal window.
- 8. Open the folder MacOS in Finder.
- 9. Double-click on installHaskell.command.
- 10. This may take a while.
- 11. You will know installation is complete at the point when it says Press any key to exit.
- 12. Restart (shut down and open again) your device.
- 2. Install Visual Studio Code

Get it <u>here</u>.

- 3. Install HaskellSupport.
 - 1. Read the general instructions very carefully, and ensure that you have complied with all the requirements properly.
 - 2. Close all open windows and running processes other than wherever you are reading this.
 - 3. Open the folder Haskell in Finder.
 - 4. Open the folder installation in Finder.
 - 5. Right click on the folder MacOS in Finder, and select Open in Terminal.
 - 6. Type in chmod +x installHaskellSupport.command in the terminal.
 - 7. Close the terminal window.
 - 8. Open the folder MacOS in Finder.
 - 9. Double-click on installHaskellSupport.command.
 - 10. This may take a while.
 - 11. You will know installation is complete if a new window pops up asking whether you trust authors. Click on "Trust".

12. Restart (shut down and open again) your device.

§2.1.2.3. Windows

- 1. Install Haskell.
 - 1. Read the general instructions very carefully, and ensure that you have complied with all the requirements properly.
 - 2. Close all open windows and running processes other than wherever you are reading this.
 - 3. Open the folder Haskell in File Explorer.
 - 4. Open the folder installation in File Explorer.
 - 5. Open the folder Windows in File Explorer.
 - 6. Double-click on installHaskell.
 - 7. This may take a while.
 - 8. You will know installation is complete at the point when it says Press any key to exit.
 - 9. Restart (shut down and open again) your device.
- 2. Install Visual Studio Code Get it *here*.
- 3. Install HaskellSupport.
 - 1. Read the general instructions very carefully, and ensure that you have complied with all the requirements properly.
 - 2. Close all open windows and running processes other than wherever you are reading this.
 - 3. Open the folder Haskell in File Explorer.
 - 4. Open the folder installation in File Explorer.
 - 5. Open the folder Windows in File Explorer.
 - 6. Double-click on installHaskellSupport.
 - 7. This may take a while.
 - 8. You will know installation is complete if a new window pops up asking whether you trust authors. Click on "Trust".
 - 9. Restart (shut down and open again) your device.

§2.2. Running Haskell

Open VS Code. A window "Welcome" should be open right now. If you close that tab, then a tab with helloworld written should pop up.

If you right-click on True, a drop-down menu should appear, in which you should select "Run Code".

You have launched GHCi. After some time, you should see the symbol >>> appear.

Type in helloworld after the >>> .

It should reply True.

§2.3. Fixing Errors

If you see squiggly red, yellow, or blue lines under your text, that means there is an error, warning, or suggestion respectively.

To explore your options to remedy the issue, put your text cursor at the text and click Ctrl+...

You have opened the QuickFix menu.

You can now choose a suitable option.

§2.4. Autocomplete

Just like texting with your friends, VS Code also gives you useful auto-complete options while you are writing.

To navigate the auto-complete options menu, hold down the Ctrl key while navigating using the \uparrow and \downarrow keys.

To accept a particular auto-complete suggestion, use Ctrl+Enter.

Basic Syntax

We will now gradually move to actually writing in Haskell. Programmers refer to this step as learning the "syntax" of a language.

To do this we will slowly translate the syntax of mathematics into the corresponding syntax of Haskell.

§3.1. The Building Blocks

Just like in math, the Haskell language relies on the symbols and expressions. The symbols include whatever characters can be typed by a keyboard, like q, w, e, r, t, y, %, (,), =, 1, 2, etc.

§3.2. Values

Haskell has values just like in math.



A value is a single and specific well-defined object that is constant, i.e., does not change from scenario to scenario nor represents an arbitrary object.

Examples include -

- The number pi with the decimal expansion 3.141592653589793 ...
- The order < on the Integer s
- The function of squaring an Integer
- the character 'a' from the keyboard
- True and False

§3.3. Variables

Haskell also has its own variables.

variable

A variable is a symbol or chain of symbols,

meant to represent an arbitrary object of some type,

usually as a way to show that whatever process follows is general enough so that the process can be carried out with *any arbitrary value* from that *type*.

The following examples should clarify further.

We have previously seen how variables are used in function definitions and theorems.

Even though we can prove theorems about Haskell, the Haskell language itself supports only function definitions and not theorems.

So we can use variables in function definitions. For example -

```
double
double :: Integer → Integer
double x = x + x
```

This reads - "double is a function that takes an Integer as input and gives an Integer as output. The double of an input \times is the output $\times + \times$ "

Note that × here is a variable.

Also, in mathematics we would write double (x), but Haskell does not need those brackets.

So we can simply put some space between double and x, i.e.,

```
we write double x,
```

in order to indicate that double is the name of the function and x is its input.

Also, Note that the names of Haskell 😑 variables have to begin with an lowercase English letter.

§3.4. Types

Every = value and = variable in Haskell must have a "type".

For example,

- 'a' has the type Char, indicating that it is a character from the keyboard.
- 5 can have the type Integer, indicating that it is an integer.
- double has the type Integer → Integer, indicating that is a function that takes an integer as input and gives an integer as output.
- In the definition of double, specifically "double x = x + x", the variable x has type Integer, indicating that it is an integer.

The type of an object is like a short description of the object's "nature".

Also, Note that the names of types usually have to begin with an uppercase English letter.

§3.4.1. Using GHCi to get Types

GHCi allows us to get the type of any value using the command :type +d followed by the value -

```
%:type +d
>>> :type +d 'a'
'a' :: Char

>>> :type +d 5
5 :: Integer

>>> :type +d double
double :: Integer → Integer
```

x :: T is just Haskell's way of saying "x is of type T".

Note - The +d at the end of :type +d stands for "default", which means that its a more basic version of the more powerful command :type

For example -

```
>>> :type +d (+)
(+) :: Integer → Integer
```

This reads - "The function + takes in two Integer's as inputs and gives an Integer as output"

Or more generally -

```
%:type \Rightarrow :type (+) (+) :: Num a \Rightarrow a \rightarrow a \rightarrow a
```

This reads - "The function + takes in two Num bers as inputs and gives a Num ber as output"

In summary, :type +d is specific, whereas :type is general.

For now, we will be assuming :type +d throughout, until we get to Chapter 6.

§3.4.2. Types of Functions

As we have seen before, double has type Integer \rightarrow Integer. This function has a single input.

And the "basic" type of the \oplus infix binary operator + is Integer \rightarrow Integer \rightarrow Integer. This function has two inputs.

We can also define functions which takes a greater number of inputs -

```
% functions with many inputs
sumOf2 :: Integer → Integer → Integer
sumOf2 x y = x + y
-- The above function has 2 inputs

sumOf3 :: Integer → Integer → Integer → Integer
sumOf3 x y z = x + y + z
-- The above function has 3 inputs

sumOf4 :: Integer → Integer → Integer → Integer
sumOf4 x y z w = x + y + z + w
-- The above function has 4 inputs
```

So we can deduce that in general,

if a function takes n inputs of types T1, T2, T3,..., Tn respectively, and gives an output of type T,

then the function itself will have type $T1 \rightarrow T2 \rightarrow T3 \rightarrow \dots \rightarrow Tn \rightarrow T$.

§3.5. Well-Formed Expressions

Of course, since we have \Rightarrow values and \Rightarrow variables, we can define "well-formed expressions" in a very similar manner to what we had before -

checking whether expression is well-formed

It is difficult to give a direct definition of a well-formed expression.

So before giving the direct definition,

we define a formal procedure to check whether an expression is a well-formed expression or not.

The procedure is as follows -

Given an expression e,

- first check whether *e* is
 - ► a = value, or

in which cases *e* passes the check and is a well-formed expression.

Failing that,

- check whether e is of the form $f(e_1, e_2, e_3, ..., e_n)$, where
 - f is a function
 - ▶ which takes *n* inputs, and
 - $e_1, e_2, e_3, ..., e_n$ are all well-formed expressions which are valid inputs to f.

And only if *e* passes this check will it be a well-formed expression.

• well-formed expression

An *expression* is said to be a well-formed expression if and only if it passes the formal checking procedure defined in \div checking whether expression is well-formed.

Recall, that last time in §1.5., when we were formally checking that $x^3 \cdot x^5 + x^2 + 1$ is indeed a \oplus well-formed expression, we skipped the part about checking whether

"
$$e_1, e_2, e_3, ..., e_n$$
 are ... valid inputs to f ."

which is present in the very last part of the formal procedure

• checking whether mathematical expression is well-formed.

That is, we didn't have a very good way to check whether

the input to a function \in the domain of the function

, Thus we could potentially face mess-ups like

$$(1,2)+3$$

Here, the expression is not well-formed because (1,2) is not a valid input for + (in other words $(1,2) \notin$ the domain of +), but we had no way to prevent this before.

Now, with types, this problem is solved!

If a function has type $T1 \rightarrow T2$,

and Haskell wants to check whether whatever input has been given to it is a valid input or not, it need only check that this input is of type T1.

We can see this in action with double -

```
>>> double 12 24
```

12 has type Integer, and therefore Haskell is quite happy to take it as input to the function double of type Integer → Integer.

However -

```
>>> double 'a'

<interactive>:1:8: error: [GHC-83865]
    * Couldn't match expected type `Integer' with actual type `Char'
    * In the first argument of `double', namely 'a'
        In the expression: double 'a'
        In an equation for `it': it = double 'a'
```

Since double has type Integer \rightarrow Integer, Haskell tries to check whether the input 'a' has type Integer, but discovers that it actually has a different type (Char), and therefore disallows it.

This is actually the point of types, and the consequences are very powerful.

Why? Recall that *\end{align*} well-formed expressions are supposed to be only those expressions which are meaningful. Since Haskell has the power to check whether expressions are well-formed or not, it will never allow us to write a "meaningless" expression.

Other programming languages which don't have types allows one to write these "meaningless" expressions and that creates "bugs" a.k.a logical errors.

The very powerful consequence is that Haskell manages to provably avoid any of these logical errors!

§3.6. Infix Binary Operators

If we enclose an 🖶 infix binary operator in brackets, we can use it just as we would a function

```
** using infix operator as function

>>> 12 + 34 -- usage as infix binary operator
46

>>> (+) 12 34 -- usage as a normal Haskell function
46

>>> 12 - 34 -- as infix binary operator
-22

>>> (-) 12 34 -- usage as a normal Haskell function
-22

>>> 12 * 34 -- as infix binary operator
408

>>> (*) 12 34 -- usage as a normal Haskell function
408
```

Conversely, if we enclose a function in backticks (`), we can use it just like an = infix binary operator.

```
wsing function as infix operator
>>> f x y = x*y + x + y -- function definition
>>> f 3 4 -- usage as a normal Haskell function
19
>>> 3 `f` 4 -- usage as an infix binary operator
19
```

§3.6.1. Precedence

infix binary operators sometimes introduce a small complication.

```
For example, when we write a + b * c, do we mean a + (b * c)
```

```
or do we mean (a + b) * c?
```

We know that the method to solve these problems are the BODMAS or PEMDAS conventions.

So Haskell assumes the first option due to BODMAS or PEMDAS conventions, whichever one takes your fancy.

This problem is called the problem of "precedence", i.e.,

"which operations in an expression are meant to be applied first (preceding) and which to be applied later?"

Haskell has a convention for handling all possible (a) infix binary operators that extends the PEMDAS convention.

(It assigns to each 😑 infix binary operator a number indicating the precedence, and those with greater value of precedence are evaluated first)

But there still remains an issue -

```
What about a - b - c?
```

```
Does it mean (a - b) - c,
```

Observe that this issue is not solved by the BODMAS or PEMDAS convention.

Haskell chooses (a - b) - c, because - is "left-associative".


```
If an = infix binary operator ? is left-associative, it means that the expression x_1 ? x_2 ? x_3 ? \dots ? x_n is equivalent to (x_1 ? x_2) ? x_3 ? \dots ? x_n which means that the leftmost ? is evaluated first.
```

```
Therefore a - b - c is equivalent to (a - b) - c and not a - (b - c).
```

But what about a - b - c - d?

```
a - b - c - d
-- take ? as -, n as 4, x_1 as a, x_2 as b, x_3 as c, x_4 as d
== ( a - b ) - c - d
-- take ? as -, n as 3, x_1 as ( a - b ), x_2 as c, x_3 as d
== ( ( a - b ) - c ) - d
```

x order of operations

```
Find out the value of 7 - 8 - 4 - 15 - 65 - 42 - 34
```

We also have the complementary notion of being "right-associative".

⇒ right-associative

```
If an = infix binary operator ? is right-associative, it means that the expression x_1 ? x_2 ? x_3 ? \dots ? x_{n-2} ? x_{n-1} ? x_n is equivalent to x_1 ? x_2 ? x_3 ? \dots ? x_{n-2} ? (x_{n-1} ? x_n) which means that the rightmost ? is evaluated first.
```

§3.7. Logic

§3.7.1. Truth

The way to represent truth or falsity in Haskell is to use the value True or the value False respectively. Both values are of type Bool.

```
>>> :type True
True :: Bool

>>> :type False
False :: Bool
```

The Bool type means "true or false".

The values True and False are called Bool eans.

§3.7.2. Statements

Haskell can check the correctness of some very simple mathematical statements -

```
** simplest logical statements

>>> 1 < 2
True

>>> 2 < 1
False

>>> 5 == 5
True

>>> 5 /= 5
False

>>> 4 == 5
False

>>> 4 /= 5
True
```

Note that ≠ is written as /= Note that ≤ is written as <= etc.

But the very nice fact is that Haskell does not require any new syntax or mechanism for these.

The way Haskell achieves this is an inbuilt \oplus infix binary operator named <, which takes two inputs, x and y, and outputs True if x is less than y, and otherwise outputs False.

So, in the statement 1 < 2,

the < function is given the two inputs 1 and 2,

and then GHCi evaluates this and outputs the correct value, True.

```
>>> 1 < 2
True
```

So let's see if all this makes sense with respect to the type of < -

```
    type of <
    >>> :type (<)
    (<) :: Ord a ⇒ a → Bool
</pre>
```

Indeed we see that < takes two inputs of type a, and gives an output of type Bool.

§3.8. Conditions

So we can use these functions to define some "condition" on a 😑 variable.

For example -

This function encodes the "condition" that the input variable must be less than 5.

However, we would definitely like to express some more complicated conditions as well. For example, we might want to express the condition -

$$x \in (4, 10]$$

We know that $x \in (4, 10]$ if and only both x > 4 AND $x \le 10$ hold true.

Using this fact, we can express the condition " $x \in (4, 10]$ " as

$$(x > 4) & (x \le 10)$$

in Haskell, since && represents "AND" in Haskell.

Let's take x to be 7 and see what is happening here step by step -

```
(x > 4) && (x \le 10)
== (7 > 4) && (7 \le 10)
== True && (7 \le 10)
== True && True
-- now applying the definition of && aka AND
== True
```

which is correct since " $7 \in (4, 10]$ " is indeed a true statement.

So the type of && is -

```
>>> :type (&&) (&&) :: Bool \rightarrow Bool \rightarrow Bool
```

It takes two **Bool** eans as inputs and outputs another **Bool** ean.

§3.8.1. Logical Operators

• logical operator

Functions like &&, which take in some Bool ean(s) as input(s), and give a single Bool ean as output are called logical operators.

You might have seen some logical operators before with names such AND, OR, NOT, NAND, NOR etc.

As we just saw, they are very useful in combining two conditions into one, more complicated condition.

For example -

• if we want to express the condition

$$x \in (-\infty, 6] \cup (15, \infty)$$

, we would re-express it as

"
$$x \leq 6$$
 OR $x > 15$ "

, which could finally be expressed in Haskell as

$$(x \le 6) | (x > 15)$$

, since is Haskell's way of writing OR.

• if we want to express the condition

$$x \notin (-\infty, 4)$$

, we could re-express it as

NOT
$$(x \in (-\infty, 4))$$

, which could be further re-written as

NOT
$$(x < 4)$$

, which then can be expressed in Haskell as

```
not (x < 4)
```

We include the definition of not as it is quite simple -

```
not :: Bool → Bool
not True = False
not False = True
```

§3.8.1.1. Exclusive OR aka XOR

Finally, we define a logical operator called XOR.

```
    XOR
    (boolean<sub>1</sub> XOR boolean<sub>2</sub>) is defined to be true if and only if at least one of the 2 inputs is true, but not both, and otherwise is defined to be false.
```

Suppose P and Q are two people running a race against each other.

Then at least one of them will win, but not both.

Therefore ((A wins) XOR(B wins)) would be true.

Also, (false XOR false) would be false, since at least one of the inputs need to be true.

Finally, (true XOR true) would be false, as both inputs are true.

§3.9. Function Definitions

Functions are a very important tool in mathematics and they form the foundations of Haskell programming.

Nearly everything in Haskell is done using functions, so there various ways of defining many kinds of functions.

§3.9.1. Using Expressions

In its simplest form, a function definition is made up of a left-hand side describing the function name and input(s), = in the middle and a right-hand side describing the output.

An example -

If we want write the following definition

$$f(x,y) := x^3 \cdot x^5 + y^3 \cdot x^2 + 14$$

Then we can write in Haskell -

```
* basic function definition

f x y = x^3 * x^5 + y^3 * x^2 + 14
```

On the left we write the name of the function followed by a number of variables which represent its inputs.

In the middle we write =, indicating that right-hand side is the definition of the left-hand side.

On the right, we write a swell-formed expression using the variables of the left-hand side, describing to how to combine and manipulate the inputs to form the output of the function.

Also, we know that $f: \mathbb{Z} \times \mathbb{Z} \to \mathbb{Z}$

We can include this information in the definition -

```
  function definition with explicit type
  f :: Integer → Integer
  f x y = x^3 * x^5 + y^3 * x^2 + 14
```

Even though it is not mandatory, it is always advised to follow the above style and explicitly provide a particular type for the function being defined.

Even if an explicit type is not provided, Haskell will assume the most general type the function could have, like what we observed in the :type command of GHCi.

Let's try to define

XOR in Haskell -

```
xor :: Bool \rightarrow Bool \rightarrow Bool
xor b1 b2 =
       at least one of the inputs is True, but
                                                 not both
  ⇔ b1 is True OR b2 is True
                                         , but
                                                 not both
-- \iff (b1 == True) OR (b2 == True)
                                         , but
                                                 not both
-- \iff (b1 == True) OR (b2 == True), but
                                                 not (b1 AND b2)
-- \iff ( b1 == True ) OR ( b2 == True ) , but ( not ( b1 AND b2 ) )
-- \iff (b1 == True) OR (b2 == True)
                                        AND ( not ( b1 AND b2 ) )
     ( ( b1 == True ) || ( b2 == True ) ) &&
                                               ( not ( b1 && b2 ) )
```

§3.9.2. Some Conveniences

§3.9.2.1. Piecewise Functions

If we have a function definition like

```
< \operatorname{functionName} > (x) \coloneqq \begin{cases} < \operatorname{expression}_1 > \; ; \ \operatorname{if} < \operatorname{condition}_1 > \\ < \operatorname{expression}_2 > \; ; \ \operatorname{if} < \operatorname{condition}_2 > \\ < \operatorname{expression}_3 > \; ; \ \operatorname{if} < \operatorname{condition}_3 > \\ \cdot \\ \cdot \\ < \operatorname{expression}_N > \; ; \ \operatorname{if} < \operatorname{condition}_N > \end{cases}
```

, it can be written in Haskell as

For example,

$$\operatorname{signum}: \mathbb{R} \to \mathbb{R}$$

$$\operatorname{signum}(x) \coloneqq \begin{cases} +1 \ ; \ \text{if} \ x \ > \ 0 \\ \\ 0 \ ; \ \text{if} \ x \ = \ 0 \\ \\ -1 \ ; \ \text{if} \ x \ < \ 0 \end{cases}$$

can written in Haskell as

If a piecewise definition has a "catch-all" or "otherwise" clause at the end, as in

```
 \begin{cases} < \operatorname{expression}_1 > & \text{; if } < \operatorname{condition}_1 > \\ < \operatorname{expression}_2 > & \text{; if } < \operatorname{condition}_2 > \\ < \operatorname{expression}_3 > & \text{; if } < \operatorname{condition}_3 > \\ \\ < \operatorname{expression}_N > & \text{; if } < \operatorname{condition}_N > \\ < \operatorname{expression}_{N+1} > & \text{; otherwise} \end{cases}
```

, it can be written in Haskell as

This | syntax symbol is called a "guard".

For example -

If a piecewise definition has ony two parts

```
< \text{functionName} > (x) \coloneqq \begin{cases} < \operatorname{expression}_1 > \; ; \; \text{if} < \operatorname{condition} > \\ < \operatorname{expression}_2 > \; ; \; \text{otherwise} \end{cases}
```

then a lot programming languages have a simple construct called "if-else" to express this -

```
n if-then-else
functionName = if condition then expression1 else expression2
```

For example -

```
    if-then-else example
    xor2 :: Bool → Bool → Bool
    xor2 b1 b2 = if b1 == b2 then False else True
    -- if both inputs to xor are the same, then output False, otherwise True
```

§3.9.2.2. Pattern Matching

We can write the map of every possible input one by one. This is called "exhaustive pattern matching".

```
    exhaustive pattern matching
    xor3 :: Bool → Bool → Bool -- answer True iff at least one input is True,
    but not both
    xor3 False False = False -- at least one input should be True
    xor3 True True = False -- since both inputs are True
    xor3 False True = True
    xor3 True False = True
```

We could be smarter and save some keystrokes.

```
    pattern matching
    xor4 :: Bool → Bool → Bool
    xor4 False b = b
    xor4 b False = b
    xor4 b1 b2 = False
```

Another small pattern match equivalent to xor1 -

```
    unused variables in pattern match
    xor5 :: Bool → Bool → Bool
    xor5 False False = False
    xor5 True True = False
    xor5 b1 b2 = True
```

But since the variables b1 and b2 are not used in the right-hand side,

we can replace them with _ (read as "wildcard")

```
N wildcard
xor6 :: Bool → Bool → Bool
xor6 False True = True
xor6 True False = True
xor6 _ _ = False
```

Wildcard (_) just means that any pattern will be accepted.

We can use other functions to help us as well -

```
    using other functions in RHS
    xor7 :: Bool → Bool → Bool
    xor7 False b = b
    xor7 True b = not b
```

We can also piecewise definitions in a pattern match -

```
    pattern matches mixed with guards
    xor8 :: Bool → Bool → Bool
    xor8 False b2 = b2 -- Notice, we can have part of the definition unguarded
    before entering the guards.
    xor8 True b2
    | b2 == False = True
    | b2 == True = False
```

Now we introduce the case .. of .. syntax. It is used to pattern-matching for any expression, not necessarily just the input variables, which are the only kinds of examples we've seen till now.

```
case <expression> of
  <pattern1> → <result1>
  <pattern2> → <result2>
...
```

The case syntax evaluates the <expression>, and matches it against each pattern in order. The first matching pattern's corresponding result is returned.

§3.9.2.3. Where, Let

```
where
xor11 :: Bool → Bool → Bool
xor11 b1 b2 = atLeastOne && (not both)
where
    atLeastOne = b1 || b2
    both = b1 && b2
```

```
xor12 :: Bool → Bool → Bool
xor12 b1 b2 =
    let
        atLeastOne = b1 || b2
        both = b1 && b2
    in
        atLeastOne && (not both)
```

§3.9.2.4. Without Inputs

Let us recall for a moment the definition for xor2 (in λ if-then-else example)

```
^{\lambda} if-then-else example  
xor2 :: Bool \rightarrow Bool \rightarrow Bool  
xor2 b1 b2 = if b1 == b2 then False else True  
-- if both inputs to xor are the same, then output False, otherwise True
```

We can see that this just equivalent to

```
xor13 :: Bool \rightarrow Bool \rightarrow Bool

xor13 b1 b2 = not (b1 == b2)
```

which can be shortened even further

```
xor14 :: Bool \rightarrow Bool \rightarrow Bool

xor14 b1 b2 = b1 \not= b2
```

, rewritten by λ using infix operator as function

```
xor15 :: Bool → Bool → Bool

xor15 b1 b2 = (\neq) b1 b2
```

and thus can finally be shortened to the extreme

```
    function definition without input variables
    xor16 :: Bool → Bool → Bool
    xor16 = (≠)
```

Notice the curious thing that the above function definition doesn't have any input variables. This ties into a fundamentally important concept called currying which we will explore later.

§3.9.2.5. Anonymous Functions

An anonymous function like

$$(x \mapsto x^3 \cdot x^5 + x^2 + 1) : \mathbb{R} \to \mathbb{R}$$

can written as

```
basic anonymous function ( \ x \rightarrow x^3 * x^5 + x^2 + 1 ) :: Double \rightarrow Double
```

Note that we used \rightarrow in place of \mapsto ,

and also added a \ (pronounced "lambda") before the input variable.

For an example with multiple inputs, consider

$$\left(x, y \mapsto \frac{1}{x} + \frac{1}{y}\right)$$

which can be written as

```
^{\lambda} multi-input anonymous function
  ( \ x y \rightarrow 1/x + 1/y )
```

x only nand

It is a well know fact that one can define all logical operators using only nand. Well, let's do so.

Redefine and, or, not and xor using only nand.

§3.9.3. Recursion

A lot of mathematical functions are defined recursively. We have already seen a lot of them in chapter 1 and exercises. Factorial, binomials and fibonacci are common examples.

We can use the recurrence

$$n! \coloneqq n \cdot (n-1)!$$

to define the factorial function.

```
% factorial
factorial :: Integer → Integer
factorial 0 = 1
factorial n = n * factorial (n-1)
```

We can use the standard Pascal's recurrence

$$\binom{n}{r} \coloneqq \binom{n-1}{r} + \binom{n-1}{r-1}$$

to define the binomial or "choose" function.

```
hinomial
choose :: Integer → Integer
0 `choose` 0 = 1
0 `choose` _ = 0
n `choose` r = (n-1) `choose` r + (n-1) `choose` (r-1)
```

And we have already seen the recurrence relation for the fibonacci function in §1.6.3..

```
naive fibonacci definition
fib :: Integer → Integer
fib 0 = 1
fib 1 = 1
fib n = fib (n-1) + fib (n-2)
```

§3.10. Optimization

For fibonacci, note that in \(\lambda \) naive fibonacci definition is, well, naive.

This is because we keep recomputing the same values again and again. For example computing fib 5 according to this scheme would look like:

If we can manage to avoid recomputing the same values over and over again, then the computation will take less time.

That is what the following definition achieves.

```
  fibonacci by tail recursion
  fibonacci :: Integer → Integer
  fibonacci n = go n 1 1 where
    go 0 a _ = a
    go n a b = go (n - 1) b (a + b)
```

We can see that this is much more efficient. Tracing the computation of fibonacci 5 now looks like:

```
% computation of tail recursion fibonacci
fibonacci 5
== go 5 1 1
== go 4 1 2
== go 3 2 3
== go 2 3 5
== go 1 5 8
== go 0 8 13
== 8
```

This is called tail recursion as we carry the tail of the recursion to speed things up. It can be used to speed up naive recursion, although not always.

Another way to evaluate fibonacci will be seen in end of chapter exercises, where we will translate Binet's formula straight into Haskell. Why can't we do so directly? As we can't represent $\sqrt{5}$ exactly and the small errors in the approximation will accumulate due to the number of operations. This exercise should allow you to end up with a blazingly fast algorithm which can compute the 12.5-th million fibonacci number in 1 sec. Our tail recursive formula takes more than 2 mins to reach there.

§3.11. Numerical Functions

Int and Integer are the types used to represent integers.

Integer can hold any number no matter how big, up to the limit of your machine's memory, while Int corresponds to the set of positive and negative integers that can be expressed in 32 or 64 bits(based on system) with the bounds changing depending on implementation (guaranteed at least -2^{29} to 2^{29}). Going outside this range may give weird results.

The reason for Int existing is historical. It was the only option at one point and continues to be available for backwards compatibility.

We will assume Integer wherever possible.

⊕ Rational

Rational and Double are the types used to deal with non-integral numbers. The former is used for fractions or rationals while the latter for reals with varying amount of precision.

Rational s are declared using % as the vinculum(the dash between numerator and denominator). For example 1%3, 2%5, 97%31, which respectively correspond to $\frac{1}{3}$, $\frac{2}{5}$, $\frac{97}{31}$.

⇒ Double

Double or Double Precision Floating Point are high-precision approximations of real numbers. For example, consider the "square root" function -

```
>>> sqrt 2 :: Double
1.4142135623730951

>>> sqrt 99999 :: Double
316.226184874055

>>> sqrt 999999999 :: Double
31622.776585872405
```

A lot of numeric operators and functions come predefined in Haskell. Some natural ones are

```
>>> 7 + 3
10
>>> 3 + 8
11
>>> 97 + 32
129
>>> 3 - 7
-4
>>> 5 - (-6)
11
>>> 546 - 312
234
>>> 7 * 3
21
>>> 8*4
32
>>> 45 * 97
4365
>>> 45 * (-12)
-540
>>> (-12) * (-11)
132
>>> abs 10
>>> abs (-10)
10
```

The internal definition of addition and subtraction is discussed in the appendix while we talk about some multiplication algorithms in chapter 10. For now, assume that these functions work exactly as expected.

Abs is also implemented in a very simple fashion.

```
    Implementation of abs function
    abs :: Num a \Rightarrow a \rightarrow a
    abs a = \text{if } a \geqslant 0 then a \text{ else } -a
```

§3.11.1. Division, A Trilogy

Now let's move to the more interesting operators and functions.

recip is a function which reciprocates a given number, but it has rather interesting type signature. It is only defined on types with the Fractional "type-class". This refers to a lot of things, but the most common ones are Rational, Float and Double. recip, as the name suggests, returns the reciprocal of the number taken as input. The type signature is recip :: Fractional $a \Rightarrow a \rightarrow a$

```
>>> recip 5

0.2

>>> k = 5 :: Int

>>> recip k

<interactive>:47:1: error: [GHC-39999] ...
```

It is clear that in the above case, 5 was treated as a Float or Double and the expected output provided. In the following case, we specified the type to be Int and it caused a horrible error. This is because for something to be a fractional type, we literally need to define how to reciprocate it. We will talk about how exactly it is defined in < some later chapter probably 8 >. For now, once we have recip defined, division can be easily defined as

```
(/) :: Fractional a \Rightarrow a \rightarrow a \rightarrow a
x / y = x * (recip y)
```

Again, notice the type signature of (/) is Fractional $a \Rightarrow a \rightarrow a \rightarrow a$.

However, suppose that we want to do integer division and we want a quotient and remainder.

Say we want only the quotient, then we have div and quot functions.

These functions are often coupled with mod and rem are the respective remainder functions. We can get the quotient and remainder at the same time using divMod and quotRem functions. A simple example of usage is

⁴It is worth pointing out that one could define `recip` using `(/)` as well given 1 is defined. While this is not standard, if `(/)` is defined for a data type, Haskell does automatically infer the reciprocation. So technically, for a datatype to be a member of the type class `Fractional` it needs to have either reciprocation or division defined, the other is inferred.

```
>>> 100 `div` 7
14

>>> 100 `mod` 7
2

>>> 100 `divMod` 7
(14,2)

>>> 100 `quot` 7
14

>>> 100 `rem` 7
2

>>> 100 `quotRem` 7
(14,2)
```

One must wonder here that why would we have two functions doing the same thing? Well, they don't actually do the same thing.

X Div vs Quot

```
From the given example, what is the difference between div and quot?

>>> 8 'div' 3

>>> (-8) 'div' 3

>>> 8 'div' (-3)

>>> 8 'div' (-3)

-3

>>> 8 'quot' 3

-2

>>> (-8) 'quot' (-3)

2

>>> 8 'quot' (-3)

-2

>>> 8 'quot' (-3)
```

X Mod vs Rem

```
From the given example, what is the difference between mod and rem?

>>> 8 'mod' 3

>>> (-8) 'mod' (-3)

-2

>>> 8 'mod' (-3)

-1

>>> 8 'rem' 3

2

>>> (-8) 'rem' 3

-2

>>> (-8) 'rem' (-3)

-2

>>> 8 'rem' (-3)

-2

>>> 8 'rem' (-3)
```

While the functions work similarly when the divisor and dividend are of the same sign, they seem to diverge when the signs don't match.

The thing here is we always want our division algorithm to satisfy d * q + r = n, |r| < |d| where d is the divisor, n the dividend, q the quotient and r the remainder.

The issue is for any $-d < r < 0 \Rightarrow 0 < r < d$. This means we need to choose the sign for the remainder.

In Haskell, mod takes the sign of the divisor (comes from floored division, same as Python's %), while rem takes the sign of the dividend (comes from truncated division, behaves the same way as Scheme's remainder or C's %.).

Basically, div returns the floor of the true division value (recall $\lfloor -3.56 \rfloor = -4$) while quot returns the truncated value of the true division (recall truncate(-3.56) = -3 as we are just truncating the decimal point off). The reason we keep both of them in Haskell is to be comfortable for people who come from either of these languages.

Also, The div function is often the more natural one to use, whereas the quot function corresponds to the machine instruction on modern machines, so it's somewhat more efficient (although not much, I had to go upto 10^{100000} to even get millisecond difference in the two).

A simple exercise for us now would be implementing our very own integer division algorithm. We begin with a division algorithm for only positive integers.

```
A division algorithm on positive integers by repeated subtraction divide :: Integer \rightarrow Integer \rightarrow (Integer, Integer) divide n d = go 0 n where go q r = if r \geqslant d then go (q+1) (r-d) else (q,r)
```

Now, how do we extend it to negatives by a little bit of case handling?

X Another Division

Figure out which kind of division have we implemented above, floored or truncated.

Now implement the other one yourself by modifying the above code appropriately.

§3.11.2. Exponentiation

Haskell defines for us three exponentiation operators, namely $(^{\land})$, $(^{\land})$, (**).

X Can you see the difference?

```
What can we say about the three exponentiation operators?
     >>> a = 5 :: Int
     >>> b = 0.5 :: Float
     >>> a^a
     3125
     >>> a^^a
     <interactive>:4:2: error: [GHC-39999]
     <interactive>:5:2: error: [GHC-39999]
     >>>
     <interactive>:6:2: error: [GHC-39999]
     >>> a^^b
     <interactive>:7:2: error: [GHC-39999]
     >>> a**b
     <interactive>:8:4: error: [GHC-83865]
     >>>
     >>> b^a
     3.125e-2
     >>> b^^a
     3.125e-2
     <interactive>:11:4: error: [GHC-83865]
     >>> b^b
     <interactive>:12:2: error: [GHC-39999]
     >>> b^^b
     <interactive>:13:2: error: [GHC-39999]
     >>> b**b
     0.70710677
     >>>
     >>> a^(-a)
     *** Exception: Negative exponent
     >>> a^^(-a)
     <interactive>:16:2: error: [GHC-39999]
     >>> a**(-a)
     <interactive>:17:2: error: [GHC-39999]
     >>> b^(-a)
     *** Exception: Negative exponent
     >>> b^^(-a)
     32.0
     >>> b**(-a)
     <interactive>:20:6: error: [GHC-83865]
```

Unlike division, they have almost the same function. The difference here is in the type signature. While, inhering the exact type signature was not expected, we can notice:

• • is raising general numbers to positive integral powers. This means it makes no assumptions about if the base can be reciprocated and just produces an exception if the power is negative and error if the power is fractional.

- ^^ is raising fractional numbers to general integral powers. That is, it needs to be sure that the reciprocal of the base exists (negative powers) and doesn't throw an error if the power is negative.
- ** is raising numbers with floating point to powers with floating point. This makes it the most general exponentiation.

The operators clearly get more and more general as we go down the list but they also get slower. However, they are also reducing in accuracy and may even output Infinity in some cases. The ... means I am truncating the output for readability, GHCi did give the complete answer.

```
>>> 2^1000
10715086071862673209484250490600018105614048117055336074 ...
>>> 2 ^^ 1000
1.0715086071862673e301
>>> 2^10000
199506311688075838488374216268358508382 ...
>>> 2^^10000
Infinity
>>> 2 ** 10000
Infinity
```

The exact reasons for the inaccuracy comes from float conversions and approximation methods. We will talk very little about this specialist topic somewhat later.

However, something within our scope is implementing (^) ourselves.

```
A naive integer exponentiation algorithm
exponentiation :: (Num a, Integral b) ⇒ a → b → a
exponentiation a 0 = 1
exponentiation a b = if b < 0
then error "no negative exponentiation"
else a * (exponentiation a (b-1))</pre>
```

This algorithm, while the most naive way to do so, computes 2^{100000} in merely 0.56 seconds.

However, we could do a bit better here. Notice, to evaluate a^b , we are making b multiplications.

A fact, which we shall prove in chapter 10, is that multiplication of big numbers is faster when it is balanced, that is the numbers being multiplied have similar number of digits.

So to do better, we could simply compute $a^{\frac{b}{2}}$ and then square it, given b is even, or compute $a^{\frac{b-1}{2}}$ and then square it and multiply by a otherwise. This can be done recursively till we have the solution.

The idea is simple: instead of doing *b* multiplications, we do far fewer by solving a smaller problem and reusing the result. While one might not notice it for smaller *b*'s, once we get into the hundreds or thousands, this method is dramatically faster.

This algorithm brings the time to compute 2^{100000} down to 0.07 seconds.

The idea is that we are now making at most 3 multiplications at each step and there are at most $\lceil \log_2(b) \rceil$ steps. This brings us down from b multiplications to $3\log(b)$ multiplications. Furthermore, most of these multiplications are somewhat balanced and hence optimized.

This kind of a strategy is called divide and conquer. You take a big problem, slice it in half, solve the smaller version, and then stitch the results together. It's a method/technique that appears a lot in Computer Science (in sorting, in searching through data, in even solving differential equations and training AI models) and we will see it again shortly.

```
§3.11.3. gcd and lcm
```

A very common function for number theoretic use cases is gcd and lcm. They are pre-defined as

```
>>> :t gcd
gcd :: Integral a ⇒ a → a → a
>>> :t lcm
lcm :: Integral a ⇒ a → a → a
>>> gcd 12 30
6
>>> lcm 12 30
```

We will now try to define these functions ourselves.

Let's say we want to find $g \coloneqq \gcd(p,q)$ and p > q. That would imply p = dq + r for some r < q. This means $g \mid p, q \Rightarrow g \mid q, r$ and by the maximal-ity of $g, \gcd(p,q) = \gcd(q,r)$. This helps us out a lot as we could eventually reduce our problem to a case where the larger term is a multiple of the smaller one and we could return the smaller term then and there. This can be implemented as:

```
    Fast GCD and LCM
gcd :: Integer → Integer → Integer
gcd p 0 = p -- Using the fact that the moment we get q | p, we will reduce
to this case and output the answer.
gcd p q = gcd q (p `mod` q)

lcm :: Integer → Integer
lcm p q = (p * q) `div` (gcd p q)
```

We can see that this is much faster. The exact number of steps or time taken is a slightly involved and not very related to what we cover. Interested readers may find it and related citations here.

This algorithm predates computers by approximately 2300 years. It was first described by Euclid and hence is called the Euclidean Algorithm. While, faster algorithms do exist, the ease of implementation and the fact that the optimizations are not very dramatic in speeding it up make Euclid the most commonly used algorithm.

While we will see these class of algorithms, including checking if a number is prime or finding the prime factorization, these require some more weapons of attack we are yet to develop.

§3.11.4. Dealing with Characters

We will now talk about characters. Haskell packs up all the functions relating to them in a module called <code>Data.Char</code>. We will explore some of the functions there.

So if you are following along, feel free to enter import Data. Char in your GHCi or add it to the top of your haskell file.

The most basic and important functions here are ord and chr. Characters, like the ones you are reading now, are represented inside a computer using numbers. These numbers are part of a standard called ASCII (American Standard Code for Information Interchange), or more generally, Unicode.

In Haskell, the function ord :: Char \rightarrow Int takes a character and returns its corresponding numeric code. The function chr :: Int \rightarrow Char does the inverse: it takes a number and returns the character it represents.

```
>>> ord 'g'
103
>>> ord 'G'
71
>>> chr 71
'G'
>>> chr 103
'g'
```

§3.12. Mathematical Functions

We will now talk about mathematical functions like log, sqrt, sin, asin etc. We will also take this opportunity to talk about real exponentiation. To begin, Haskell has a lot of pre-defined functions.

Basic Syntax

```
>>> sqrt 81
9.0
>>> log (2.71818)
0.9999625387017254
>>> log 4
1.3862943611198906
>>> log 100
4.605170185988092
>>> logBase 10 100
2.0
>>> exp 1
2.718281828459045
>>> exp 10
22026.465794806718
>>> pi
3.141592653589793
>>> sin pi
1.2246467991473532e-16
>>> cos pi
-1.0
>>> tan pi
-1.2246467991473532e-16
>>> asin 1
1.5707963267948966
>>> asin 1/2
0.7853981633974483
>>> acos 1
0.0
>>> atan 1
0.7853981633974483
```

pi is a predefined variable inside haskell. It carries the value of π upto some decimal places based on what type it is forced in.

```
>>> a = pi :: Float
>>> a
3.1415927
>>> b = pi :: Double
>>> b
3.141592653589793
```

All the functions above have the type signature Fractional $a \Rightarrow a \rightarrow a$ or for our purposes Float \rightarrow Float. Also, notice the functions are not giving exact answers in some cases and instead are giving approximations. These functions are quite unnatural for a computer, so we surely know that the computer isn't processing them. So what is happening under the hood?

§3.12.1. Binary Search

⊕ Hi-Lo game

You are playing a number guessing game with a friend. Your friend is thinking of a number between 1 and k, and you have to guess it. After every guess, your friend will say whether your guess is too high, too low, or correct. Prove that you can always guess the number in $\lceil \log_2(k) \rceil$ guesses.

This follows from choosing $\frac{k}{2}$ and then picking the middle element of this smaller range. This would allow us to find the number in $\lceil \log_2(k) \rceil$ queries.

This idea also works for slightly less direct questions:

X Hamburgers (Codeforces 371C)

Polycarpus have a fixed hamburger recipe using B pieces of bread , S pieces of sausage and C pieces of cheese; per burger.

At the current moment, in his pantry he has:

- n_b units of bread,
- n_s units of sausage,
- n_c units of cheese.

And the market prices per unit is:

- p_b rubles per bread,
- *p_s* rubles per sausage,
- p_c rubles per cheese.

Polycarpus's wallet has *r* rubles.

Each hamburger must be made exactly according to the recipe (ingredients cannot be split or substituted), and the store has an unlimited supply of each ingredient.

```
Write function burgers :: (Int, Int, Int) \rightarrow (Int, Int, Int) \rightarrow (Int, Int, Int) \rightarrow Int - which takes (B,S,C), (n_b,n_s,n_c), (p_b,p_s,p_c) and r and tells us how many burgers can Polycarpus make. Examples
```

```
burgers (3,2,1) (6,4,1) (1,2,3) 4 = 2
burgers (2,0,1) (1,10,1) (1,10,1) 21 = 7
burgers (1,1,1) (1,1,1) (1,1,3) 1000000000000 = 200000000001
```

This question may look like a combinatorics or recursion question, but any of those approaches will be very inefficient.

Let's try to algebraically compute how much money is needed to make x burgers. We can define this cost function as cost times the number of ingredient required minus the amount already in pantry. This will something like:

$$f(x) = p_b \max(0, x \cdot B - n_b) + p_s \max(0, x \cdot S - n_s) + p_c \max(0, x \cdot C - n_c)$$

And now we want to look for maximal x such that $f(x) \le r$. Well, that can be done using Binary search!

```
burgers (b, s, c) (nb, ns, nc) (pb, ps, pc) r = binarySearch 0 upperBound
 where
    -- Cost function f(x)
   cost x = let needB = max 0 (x * b - nb)
                needS = max 0 (x * s - ns)
                needC = max 0 (x * c - nc)
             in needB * pb +
                needS * ps +
                needC * pc
   upperBound = maximum [b,s,c] + r
   binarySearch low high
       low > high = high
       otherwise =
          let mid = (low + high) `div` 2
          in if cost mid \leq r
                then binarySearch (mid + 1) high
                else binarySearch low (mid - 1)
```

Here ia a similar exercise for your practice.

X House of Cards (Codeforces 471C)

- A house of cards consists of some non-zero number of floors.
- Each floor consists of a non-zero number of rooms and the ceiling. A room is two cards that are leaned towards each other. The rooms are made in a row, each two adjoining rooms share a ceiling made by another card.
- Each floor besides for the lowest one should contain less rooms than the floor below.

Please note that the house may end by the floor with more than one room, and in this case they also must be covered by the ceiling. Also, the number of rooms on the adjoining floors doesn't have to differ by one, the difference may be more.


The height of the house is the number of floors in it.

Given n cards, it is possible that you can make a lot of different houses of different heights. Write a function houses :: Integer \rightarrow Integer to count the number of the distinct heights of the houses that they can make using exactly n cards.

Examples

```
count 13 = 1
count 6 = 0
```

In the first sample you can build only these two houses (remember, you must use all the cards):

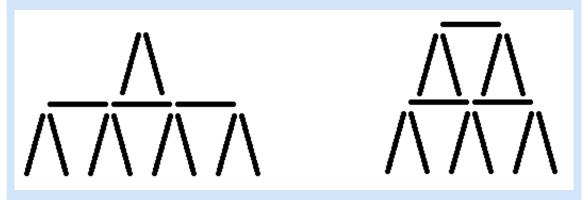

Thus, 13 cards are enough only for two floor houses, so the answer is 1.

The six cards in the second sample are not enough to build any house.

The reason we are interested in this methodology is as we could do this to find roots of polynomials, especially roots. How?

While using a raw binary search for roots would be impossible as the exact answer is seldom rational and hence, the algorithm would never terminate. So instead of searching for the exact root, we look for an approximation by keeping some tolerance. Here is what it looks like:

X Cube Root

Write a function bsCbrt :: Float \rightarrow Float \rightarrow Float which calculates the cube root of a number upto some tolerance using binary search.

The internal implementation sets the tolerance to some constant, defining, for example as sqrt = bsSqrt 0.00001

Furthermore, there is a faster method to compute square roots and cube roots(in general roots of polynomials), which uses a bit of analysis. You will find it defined and walked-through in the back exercise.

§3.12.2. Taylor Series

We know that $\ln(1+x)=x-\frac{x^2}{2}+\frac{x^3}{3}-\cdots$. For small $x,\ln(1+x)\approx x$. So if we can create a scheme to make x small enough, we could get the logarithm by simply multiplying. Well, $\ln(x^2)=2\ln(|x|)$. So, we could simply keep taking square roots of a number till it is within some error range of 1 and then simply use the fact $\ln(1+x)\approx x$ for small x.

This is a very efficient algorithm for approximating <code>log</code>. Doing better requires the use of either pre-computed lookup tables(which would make the program heavier) or use more sophisticated mathematical methods which while more accurate would slow the program down. There is an exercise in the back, where you will implement a state of the art algorithm to compute <code>log</code> accurately upto 400-1000 decimal places.

Finally, now that we have log = logTay 0.0001, we can easily define some other functions.

```
logBase a b = log(b) / log(a)
exp n = if n == 1 then 2.71828 else (exp 1) ** n
(**) a b = exp (b * log(a))
```

We will use this same Taylor approximation scheme for \sin and \cos . The idea here is: $\sin(x) \approx x$ for small x and $\cos(x) = 1$ for small x. Furthermore, $\sin(x+2\pi) = \sin(x)$, $\cos(x+2\pi) = \cos(x)$ and $\sin(2x) = 2\sin(x)\cos(x)$ as well as $\cos(2x) = \cos^2(x) - \sin^2(x)$.

This can be encoded as

```
Sin and Cos using Taylor Approximation
sinTay :: Float \rightarrow Float \rightarrow Float
 sinTay tol x
                          = x -- Base case: sin(x) ≈ x when x is small
    abs(x) ≤ tol
    abs(x) ≥ 2 * pi
                           = if x > 0
                               then sinTay tol (x - 2 * pi)
                               else sinTay tol (x + 2 * pi) -- Reduce x to
 [-2\pi, 2\pi]
                           = 2 * (\sin Tay \ tol \ (x/2)) * (\cos Tay \ tol \ (x/2)) --
   otherwise
 \sin(x) = 2 \sin(x/2) \cos(x/2)
cosTay :: Float \rightarrow Float \rightarrow Float
 cosTay tol x
                          = 1.0 -- Base case: cos(x) ≈ 1 when x is small
   abs(x) ≤ tol
   abs(x) ≥ 2 * pi
                          = if x > 0
                               then cosTay tol (x - 2 * pi)
                               else cosTay tol (x + 2 * pi) -- Reduce x to
 [-2\pi, 2\pi]
                            = (\cos Tay \ tol \ (x/2))**2 - (\sin Tay \ tol \ (x/2))**2
   otherwise
cos(x) = cos<sup>2</sup>(x/2) - sin<sup>2</sup>(x/2)
```

As one might notice, this approximation is somewhat poorer in accuracy than log. This is due to the fact that the taylor approximation is much less truer on sin and cos in the neighborhood of 0 than for log.

We will see a better approximation once we start using lists, using the power of the full Taylor expansion. Finally, similar to our above things, we could simply set the tolerance and get a function that takes an input and gives an output, name it \sin and \cos and define $\tan x = (\sin x) / (\cos x)$.

X Inverse Trig

Use taylor approximation and trigonometric identities to define inverse sin(asin), inverse cos(acos) and inverse tan(atan).

§3.13. Exercises

x Collatz

Collatz conjecture states that for any $n \in \mathbb{N}$ exists a k such that $c^{k(n)} = 1$ where c is the Collatz function which is $\frac{n}{2}$ for even n and 3n + 1 for odd n.

Write a function col :: Integer \to Integer which, given a n, finds the smallest k such that $c^{k(n)}=1$, called the Collatz chain length of n.

X Newton-Raphson method

⇒ Newton–Raphson method

Newton-Raphson method is a method to find the roots of a function via subsequent approximations.

Given f(x), we let x_0 be an initial guess. Then we get subsequent guesses using

$$x_{n+1} = x_n - \frac{f(x_n)}{f'(x_n)}$$

As
$$n \to \infty$$
, $f(x_n) \to 0$.

The intuition for why this works is: imagine standing on a curve and wanting to know where it hits the x-axis. You draw the tangent line at your current location and walk down it to where it intersects the x-axis. That's your next guess. Repeat. If the curve behaves nicely, you converge quickly to the root.

Limitations of Newton-Raphson method are

- Requires derivative: The method needs the function to be differentiable and requires evaluation of the derivative at each step.
- Initial guess matters: A poor starting point can lead to divergence or convergence to the wrong root.
- Fails near inflection points or flat slopes: If f'(x) is zero or near zero, the method can behave erratically.
- Not guaranteed to converge: Particularly for functions with multiple roots or discontinuities.

Considering, $f(x) = x^2 - a$ and $f(x) = x^3 - a$ are well behaved for all a, implement sqrtNR :: Float \rightarrow Float \rightarrow Float and cbrtNR :: Float \rightarrow Float which finds the square root and cube root of a number upto a tolerance using the Newton-Raphson method.

Hint: The number we are trying to get the root of is a sufficiently good guess for numbers absolutely greater than 1. Otherwise, 1 or -1 is a good guess. We leave it to your mathematical intuition to figure out when to use what.

X Digital Root

The digital root of a number is the digit obtained by summing digits until you get a single digit.

```
For example digitalRoot 9875 = digitalRoot (9+8+7+5) = digitalRoot 29 = digitalRoot (2+9).

= digitalRoot 11 = digitalRoot (1+1) = 2

Implement the function digitalRoot :: Int → Int.
```

X AGM Log

A rather uncommon mathematical function is AGM or arithmetic-geometric mean. For given two numbers,

$$\mathrm{AGM}(x,y) = \begin{cases} x & \text{if } x = y \\ \mathrm{AGM}\left(\frac{x+y}{2}, \sqrt{xy}\right) & \text{otherwise} \end{cases}$$

Write a function $agm :: (Float, Float) \rightarrow Float \rightarrow Float$ which takes two floats and returns the AGM within some tolerance(as getting to the exact one recursively takes, about infinite steps).

Using AGM, we can define

$$\ln(x) \approx \frac{\pi}{2\operatorname{AGM}\!\left(1,\frac{2^{2-m}}{x}\right)} - m\ln(2)$$

which is precise upto p bits where $x2^m > 2^{\frac{p}{2}}$.

Using the above defined agm function, define $logAGM :: Int \rightarrow Float \rightarrow Float \rightarrow Float$ which takes the number of bits of precision, the tolerance for agm and a number greater than 1 and gives the natural logarithm of that number.

Hint: To simplify the question, we added the fact that the input will be greater than 1. This means a simplification is taking m = p/2 directly. While getting a better m is not hard, this is just simpler.

X Multiplexer

A multiplexer is a hardware element which chooses the input stream from a variety of streams. It is made up of $2^n + n$ components where the 2^n are the input streams and the n are the selectors.

- (i) Implement a 2 stream multiplex $\max 2 :: Bool \to Bool \to Bool \to Bool$ where the first two booleans are the inputs of the streams and the third boolean is the selector. When the selector is True, take input from stream 1, otherwise from stream 2.
- (ii) Implement a 2 stream multiplex using only boolean operations.
- (iii) Implement a 4 stream multiplex. The type should be $mux4 :: Bool \rightarrow Gool$. (There are 6 arguments to the function, 4 input streams and 2 selectors). We encourage you to do this in atleast 2 ways (a) Using boolean operations (b) Using only mux2.

Could you describe the general scheme to define $mux2^n$ (a) using only boolean operations (b) using only $mux2^(n-1)$ (c) using only $mux2^2$?

X Modular Exponentiation

Implement modular exponentiation $(a^b \mod m)$ efficiently using the fast exponentiation method. The type signature should be $\mod \operatorname{Exp} :: \operatorname{Int} \to \operatorname{Int} \to \operatorname{Int} \to \operatorname{Int}$

X Bean Nim (Putnam 1995, B5)

A game starts with four heaps of beans containing a,b,c, and d beans. A move consists of taking either

- (a) one bean from a heap, provided at least two beans are left behind in that heap, or
- (b) a complete heap of two or three beans.

The player who takes the last heap wins. Do you want to go first or second?

Write a recursive function to solve this by brute force. Call it naiveBeans :: Int \rightarrow Int \rightarrow Int \rightarrow Int \rightarrow Bool which gives True if it is better to go first and False otherwise. Play around with this and make some observations.

Now write a much more efficient (should be one line and has no recursion) function smartBeans :: Int \rightarrow Int \rightarrow Int \rightarrow Int \rightarrow Bool which does the same.

x Squares and Rectangles on a chess grid

Write a function squareCount :: Int \rightarrow Int to count number of squares on a $n \times n$ grid. For example, squareCount 1 = 1 and squareCount 2 = 5 as four 1 \times 1 squares and one 2x2 square.

Furthermore, also make a function rectCount :: Int \rightarrow Int to count the number of rectangles on a $n \times n$ grid.

Finally, make genSquareCount :: (Int, Int) \rightarrow Int and genRectCount :: (Int, Int) \rightarrow Int to count number of squares and rectangle in a $a \times b$ grid.

X Knitting Baltik (COMPFEST 13, Codeforces 1575K)

Mr. Chanek wants to knit a batik, a traditional cloth from Indonesia. The cloth forms a grid with size $m \times n$. There are k colors, and each cell in the grid can be one of the k colors.

Define a sub-rectangle as an pair of two cells $((x_1,y_1),(x_2,y_2))$, denoting the top-left cell and bottom-right cell (inclusively) of a sub-rectangle in the grid. Two sub-rectangles $((x_1,y_1),(x_2,y_2))$ and $((x_1,y_1),(x_2,y_2))$ have the same pattern if and only if the following holds:

- (i) they have the same width $(x_2 x_1 = x_4 x_3)$;
- (ii) they have the same height $(y_2 y_1 = y_4 y_3)$;
- (iii) for every pair i,j such that $0\leq i\leq x_2-x_1$ and $0\leq j\leq y_2-y_1$, the color of cells (x_1+i,y_1+j) and (x_3+i,y_3+j) is the same.

Write a function countBaltik of type


```
(Int, Int) \rightarrow Int \rightarrow (Int, Int) \rightarrow (Int, Int) \rightarrow (Int, Int) \rightarrow Integer to count the number of possible batik color combinations, such that the subrectangles ((a_x,a_y),(a_x+r-1,a_y+c-1)) and ((b_x,b_y),(b_x+r-1,b_y+c-1)) have the same pattern.
```

Input countBaltik takes as input:

- The size of grid (m, n)
- Number of colors k
- Size of sub-rectangle (r, c)
- (a_x, a_y)
- (b_x, b_y)

and should output an integer denoting the number of possible batik color combinations.

For example: countBaltik (3,3) 2 (2,2) (1,1) (2,2) = 32. The following are all 32 possible color combinations in the first example.

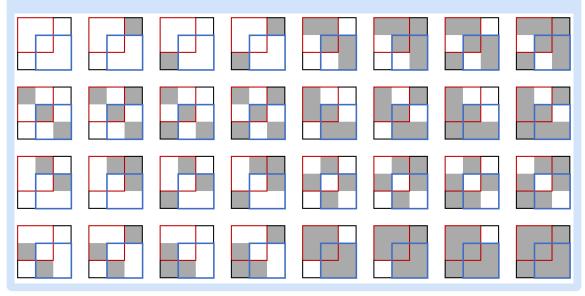

X Modulo Inverse

Given a prime modulus $\,p>a\,$, according to Euclidean Division p=ka+r where

$$\begin{aligned} ka + r &\equiv 0 \operatorname{mod} p \\ &\Rightarrow ka \equiv -r \operatorname{mod} p \\ &\Rightarrow -ra^{-1} \equiv k \operatorname{mod} p \\ &\Rightarrow a^{-1} \equiv -kr^{-1} \operatorname{mod} p \end{aligned}$$

Using this, implement $\operatorname{modInv} :: \operatorname{Int} \to \operatorname{Int} \to \operatorname{Int}$ which takes in a and p and gives $a^{-1} \operatorname{mod} p$.

Note that this reasoning does not hold if p is not prime, since the existence of a^{-1} does not imply the existence of r^{-1} in the general case.

X New Bakery(Codeforces)

Bob decided to open a bakery. On the opening day, he baked n buns that he can sell. The usual price of a bun is a coins, but to attract customers, Bob organized the following promotion:

- Bob chooses some integer $k(0 \le k \le \min(n, b))$.
- Bob sells the first k buns at a modified price. In this case, the price of the i-th $(1 \le i \le k)$ sold bun is (b-i+1) coins.
- The remaining (n k) buns are sold at a coins each.

Note that k can be equal to 0. In this case, Bob will sell all the buns at a coins each.

Write a function profit :: Int \rightarrow Int \rightarrow Int \rightarrow Int Help Bob determine the maximum profit he can obtain by selling all n buns with a being the normal price and b the price of first bun to be sold at a modified price.

Example

Note

In the first test case, it is optimal for Bob to choose k=1. Then he will sell one bun for 5 coins, and three buns at the usual price for 4 coins each. Then the profit will be 5+4+4+4=17 coins.

In the second test case, it is optimal for Bob to choose k=5. Then he will sell all the buns at the modified price and obtain a profit of 9+8+7+6+5=35 coins.

In the third test case, it is optimal for Bob to choose k=0. Then he will sell all the buns at the usual price and obtain a profit of $10 \cdot 10 = 100$ coins.

x Sumac

A Sumac sequence starts with two non-zero integers t_1 and t_2 .

The next term, $t_3 = t_1 - t_2$

More generally, $t_n = t_{n-2} - t_{n-1}$

The sequence ends when $t_n \leq 0$. All values in the sequence must be positive.

Write a function sumac :: Int \rightarrow Int to compute the length of a Sumac sequence given the initial two terms, t_1 and t_2 .

Examples(Sequence is included for clarification)

X Binet Formula

Binet's formula is an explicit, closed form formula used to find the nth term of the Fibonacci sequence. It is so named because it was derived by mathematician Jacques Philippe Marie Binet, though it was already known by Abraham de Moivre.

Thr problem with this remarkable formula is that it is cluttered with irrational numbers, specifically $\sqrt{5}$.

$$F_{n} = \frac{\left(1 + \sqrt{5}\right)^{n} - \left(1 - \sqrt{5}\right)^{n}}{2^{n}\sqrt{5}}$$

While computing using the Binet formula would only take $2*\log(n)+2$ operations (exponentiation takes $\log(n)$ time), doing so directly is out of the question as we can't represent $\sqrt{5}$ exactly and the small errors in the approximation will accumulate due to the number of operations.

So an idea is to do all computations on a tuple (a,b) which represents $a+b\sqrt{5}$, We will need to define addition, subtraction, multiplication and division on these tuples as well as define a fast exponentiation here.

With that in hand, Write a function fibMod :: Integer \rightarrow Integer which computes Fibonacci numbers using this method.

X A puzzle (UVA 10025)

A classic puzzle involves replacing each ? with one can set operators + or -, in order to obtain a given k

$$? 1? 2? \dots ? n = k$$

For example: to obtain k=12, the expression to be used will be:

$$-1+2+3+4+5+6-7=12$$

with n = 7

Write function puzzleCount :: Int \to Int which given a k tells us the smallest n such that the puzzle can be solved.

Examples

```
puzzleCount 12 = 7
puzzleCount -3646397 = 2701
```

X Rating Recalculation (Code Forces)

It is well known in the Chess Federation that the boundary for the Grandmaster title is carefully maintained just above the rating of International Master Wupendra Wulkarni. However, due to a recent miscalculation in the federation's new rating system, Wulkarni was mistakenly awarded the Grandmaster title.

To correct this issue, the federation has decided to revamp the division system, ensuring that Wupendra is placed into Division 2 (International Master), well below Grandmaster status.

A simple rule like if rating \leq wupendraRating then div = max div 2 would be too obvious and controversial. Instead, the head of the system, Mike, proposes a more subtle and mathematically elegant solution.

First, Mike chooses the integer parameter $k \geq 0$.

Then, he calculates the value of the function f(r-k,r), where r is the user's rating, and

$$f(n,x) := \frac{1 + x + \frac{x^2}{2!} + \frac{x^3}{3!} + \dots + \frac{x^n}{n!}}{e^x}$$

Finally, the user's division is defined by the formula

$$\operatorname{div}(r) = \left| \frac{1}{f(r-k, r)} \right| - 1$$

.

Write function ratingCon :: Int \rightarrow Int to find the minimum k, given Wupendra's rating, so that the described algorithm assigns him a division strictly greater than 1 and GM Wulkarni doesn't become a reality.

Examples

```
ratingCon 5 = 2
ratingCon 100 = 5
ratingCon 200 = 7
ratingCon 2500 = 23
ratingCon 3000 = 25
ratingCon 3500 = 27
```

X Knuth's Arrow

Knuth introduced the following notation for a family of math notation:

$$3 \cdot 4 = 12$$
$$3 \uparrow 4 = 3 \cdot (3 \cdot (3 \cdot 3)) = 3^4 = 81$$
$$3 \uparrow \uparrow 4 = 3 \uparrow (3 \uparrow (3 \uparrow 3)) = 3^{3^3} = 3^{7625597484987}$$

 $\approx 1.25801429062749131786039069820328121551804671431659601518967 \times 10^{3638334640024} \\ 3 \uparrow \uparrow \uparrow 4 = 3 \uparrow \uparrow (3 \uparrow \uparrow (3 \uparrow \uparrow 3))$

You can see the pattern as well as the extreme growth rate. Make a function $knuthArrow :: Integer \rightarrow Int \rightarrow Integer \rightarrow Integer$ which takes the first argument, number of arrows and second argument and provides the answer.

X Caves (IOI 2013, P4)

While lost on the long walk from the college to the UQ Centre, you have stumbled across the entrance to a secret cave system running deep under the university. The entrance is blocked by a security system consisting of N consecutive doors, each door behind the previous; and N switches, with each switch connected to a different door.

The doors are numbered $0, 1, \dots, 4999$ in order, with door 0 being closest to you. The switches are also numbered $0, 1, \dots, 4999$, though you do not know which switch is connected to which door.

The switches are all located at the entrance to the cave. Each switch can either be in an up or down position. Only one of these positions is correct for each switch. If a switch is in the correct position then the door it is connected to will be open, and if the switch is in the incorrect position then the door it is connected to will be closed. The correct position may be different for different switches, and you do not know which positions are the correct ones.

You would like to understand this security system. To do this, you can set the switches to any combination, and then walk into the cave to see which is the first closed door. Doors are not transparent: once you encounter the first closed door, you cannot see any of the doors behind it. You have time to try 70,000 combinations of switches, but no more. Your task is to determine the correct position for each switch, and also which door each switch is connected to.

X Carnivel (CEIO 2014)

Each of Peter's N friends (numbered from 1 to N) bought exactly one carnival costume in order to wear it at this year's carnival parties. There are C different kinds of costumes, numbered from 1 to C. Some of Peter's friends, however, might have bought the same kind of costume. Peter would like to know which of his friends bought the same costume. For this purpose, he organizes some parties, to each of which he invites some of his friends.

Peter knows that on the morning after each party he will not be able to recall which costumes he will have seen the night before, but only how many different kinds of costumes he will have seen at the party. Peter wonders if he can nevertheless choose the guests of each party such that he will know in the end, which of his friends had the same kind of costume. Help Peter!

Peter has $N \leq 60$ friends and we can not have more than 365 parties(as we want to know the costumes by the end of the year).

Types as Sets

§4.1. Sets



A set is a well-defined collection of "things".

These "things" can be values, objects, or other sets.

For any given set, the "things" it contains are called its elements.

Some basic kinds of sets are -

The empty set is the *set that contains no elements* or equivalently, {}.

• \(\ddagger singleton set

A singleton set is a set that contains exactly one element, such as $\{34\}$, $\{\triangle\}$, the set of natural numbers strictly between 1 and 3, etc.

We might have encountered some mathematical sets before, such as the set of real numbers \mathbb{R} or the set of natural numbers \mathbb{N} , or even a set following the rules of vectors (a vector space).

We might have encountered sets as data structures acting as an unordered collection of objects or values, such as Python sets - $set([]), \{1, 2, 3\}$, etc.

Note that sets can be finite ($\{12, 1, \circ, \vec{x}\}$), as well as infinite (\mathbb{N}).

A fundamental keyword on sets is " \in ", or "belongs".

belongs

Given a value x and a set S,

 $x \in S$ is a claim that x is an element of S,

Other common operations include -

 $A \cup B$ is the set containing all those x such that either $x \in A$ or $x \in B$.

intersection

 $A \cap B$ is the set containing all those x such that $x \in A$ and $x \in B$.

e cartesian product

 $A \times B$ is the set containing all ordered pairs (a, b) such that $a \in A$ and $b \in B$.

So,

$$\begin{split} X == \{x_1, x_2, x_3\} \text{ and } Y == \{y_1, y_2\} \\ \Rightarrow \\ X \times Y == \{(x_1, y_1), (x_1, y_2), (x_2, y_1), (x_2, y_2), (x_3, y_1), (x_3, y_2)\} \end{split}$$

```
\oplus set exponent B^A is the set of all functions with domain A and co-domain B, or equivalently, the set of all functions f such that f:A\to B, or equivalently, the set of all functions from A to B.
```

x size of exponent set

If A has |A| elements, and B has |B| elements, then how many elements does B^A have?

§4.2. Types

We have encountered a few types in the previous chapter, such as Bool, Integer and Char. For our limited purposes, we can think about each such type as the set of all values of that type.

For example,

- Bool can be thought of as the set of all boolean values, which is { False , True }.
- Integer can be thought of as the set of all integers, which is {0, 1, -1, 2, -2, ...}.
- Char can be thought of as the set of all characters, which is { '\NUL', '\SOH', '\STX',..., 'a', 'b', 'c',..., 'A', 'B', 'C',...}

If this analogy were to extend further, we might expect to see analogues of the basic kinds of sets and the common set operations for types, which we can see in the following -

```
§4.2.1. :: is analogous to \in or = belongs
```

Whenever we want to claim a value \times is of type \top , we can use the :: keyword, in a similar fashion to \in , i.e., we can say $\times :: \top$ in place of $x \in T$.

In programming terms, this is known as declaring the variable \mathbf{x} .

For example,

```
declaration of x

x :: Integer
x = 42
```

This reads - "Let $x \in \mathbb{Z}$. Take the value of x to be 42."

This reads - "Let $y \in \{\text{False}, \text{True}\}$. Take the value of y to be the \oplus of True and False."

x declaring a variable

```
Declare a variable of type Char.
```

```
§4.2.2. A \rightarrow B is analogous to B^A or = set exponent
```

As B^A contains all functions from A to B, so is each function f defined to take an input of type A and output of type B satisfy $f :: A \rightarrow B$.

For example -

```
• Note function

succ :: Integer → Integer

succ x = x + 1
```

```
    A another function
    even :: Integer → Bool
    even n = if n `mod` 2 == 0 then True else False
```

x basic function definition

```
Define a non-constant function of type Bool \rightarrow Integer.
```

x difference between declaration and function definition

What are the differences between declaring a variable and defining a function?

```
§4.2.3. ( A , B ) is analogous to A \times B or = cartesian product
```

```
As A \times B contains all pairs (a,b) such that a \in A and b \in B, so is every pair (a,b) of type (A,B) if x is of type A and b is of type B.
```

For example, if I ask GHCi to tell me the type of (True, 'c'), then it would tell me that the value's type is (Bool, Char) -

```
h type of a pair
>>> :type (True, 'c')
(True, 'c') :: (Bool, Char)
```

```
This reads - "GHCi, what is the type of (True, 'c')?

Answer: the type of (True, 'c') is (Bool, Char)."
```

If we have a type X with elements X1, X2, and X3, and another type Y with elements Y1 and Y2, we can use the author-defined function listOfAllElements to obtain a list of all elements of certain types -

```
>>> listOfAllElements :: [X]
[X1,X2,X3]
>>> listOfAllElements :: [Y]
[Y1,Y2]
>>> listOfAllElements :: [(X,Y)]
[(X1,Y1),(X1,Y2),(X2,Y1),(X2,Y2),(X3,Y1),(X3,Y2)]
>>> listOfAllElements :: [(Char,Bool)]
[('\NUL',False),('\NUL',True),('\SOH',False),('\SOH',True), . . . ]
```

There are two fundamental inbuilt operations from a product type -

A function to get the first component of a pair -

```
first component of a pair
fst (a,b) = a
```

and a similar function to get the second component -

```
second component of a pair
snd (a,b) = b
```

We can define our own functions from a product type using these -

```
    function from a product type
    xorOnPair :: ( Bool , Bool ) → Bool
    xorOnPair pair = ( fst pair ) /= ( snd pair )
```

or even by pattern matching the pair -

```
A another function from a product type

xorOnPair' :: ( Bool , Bool ) → Bool

xorOnPair' ( a , b ) = a ≠ b
```

Also, we can define our functions to a product type -

For example, consider the useful inbuilt function divMod, which divides a number by another, and returns both the quotient and the remainder as a pair. Its definition is equivalent to the following -

```
    function to a product type
    divMod :: Integer → Integer → ( Integer , Integer )
    divMod n m = ( n `div` m , n `mod` m )

    size of a product type
```

If a type T has n elements, and type $\mathsf{T'}$ has m elements, then how many elements does $(\mathsf{T}.\mathsf{T'})$ have?

```
§4.2.4. () is analogous to \(\displies\) singleton set
```

(), pronounced Unit, is a type that contains exactly one element.

That unique element is ().

So, it means that ()::(), which might appear a bit confusing.

The () on the left of :: is just a simple value, like 1 or 'a'.

The () on the right of :: is a type, like Integer or Char.

This value () is the only value whose type is ().

On the other hand, other types might have multiple values of that type. (such as Integer, where both 1 and 2 have type Integer.)

We can even check this using listOfAllElements -

```
N elements of unit type
>>> listOfAllElements :: [()]
[()]
```

This reads - "The list of all elements of the type () is a list containing exactly one value, which is the value ()."

```
x function to unit

Define a function of type x ( ).
```

x function from unit

Define a function of type $() \rightarrow Bool$.

§4.2.5. No intersection of Types

We now need to discuss an important distinction between sets and types. While two different sets can have elements in common, like how both \mathbb{R} and \mathbb{N} have the element 10 in common, on the other hand, two different types T1 and T2 cannot have any common elements.

For example, the types Int and Integer have no elements in common. We might think that they have the element 10 in common, however, the internal structures of 10:: Int and 10:: Integer are very different, and thus the two 10 s are quite different.

Thus, the intersection of two different types will always be empty and doesn't make much sense anyway. Therefore, no intersection operation is defined for types.

§4.2.6. No ⊕ union of Types

Suppose the type $T1 \cup T2$ were an actual type. It would have elements in common with the type T1. As discussed just previously, this is undesirable and thus disallowed.

But there is a promising alternative, for which we need to define the set-theoretic notion of disjoint union.

x subtype

Do you think that there can be an analogue of the *subset* relation \subseteq for types?

§4.2.7. Disjoint Union of Sets

• disjoint union

 $A \sqcup B$ is defined to be $(\{0\} \times A) \cup (\{1\} \times B)$, or equivalently, the set of all pairs either of the form (0, a) such that $a \in A$, or of the form (1, b) such that $b \in B$.

So,

$$\begin{split} X == \{x_1, x_2, x_3\} \text{ and } Y == \{y_1, y_2\} \\ \Rightarrow \\ X \sqcup Y == \{(0, x_1), (0, x_2), (0, x_3), (1, y_1), (1, y_2)\} \end{split}$$

The main advantage that this construct offers us over the usual \oplus union is that given an element x from a disjoint union $A \sqcup B$, it is very easy to see whether x comes from A, or whether it comes from B.

For example, consider the statement - $(0, 10) \in \mathbb{R} \sqcup \mathbb{N}$.

It is obvious that this "10" comes from \mathbb{R} and does not come from \mathbb{N} .

 $(1,10) \in \mathbb{R} \sqcup \mathbb{N}$ would indicate exactly the alternative, i.e, the "10" here comes from \mathbb{N} , not \mathbb{R} .

§4.2.8. Either A B is analogous to $A \sqcup B$ or \Rightarrow disjoint union

The term "either" is motivated by its appearance in the definition of 🖶 disjoint union.

Recall that in a 🖶 disjoint union, each element has to be

- of the form (0, a), where $a \in A$, and A is the set to the left of the \sqcup symbol,
- or they can be of the form (1, b), where $b \in B$, and B is the set to the right of the \sqcup symbol.

Similarly, in Either A B, each element has to be

- of the form Left a, where a:: A
- or of the form Right b, where b:: B

If we have a type X with elements X1, X2, and X3, and another type Y with elements Y1 and Y2, we can use the author-defined function listOfAllElements to obtain a list of all elements of certain types -

We can define functions to an **Either** type.

Consider the following problem: We have to make a function that provides feedback on a quiz. We are given the marks obtained by a student in the quiz marked out of 10 total marks. If the marks obtained are less than 3, return 'F', otherwise return the marks as a percentage -

This reads - "

Let feedback be a function that takes an Integer as input and returns Either a Char or an Integer.

As Char and Integer occurs on the left and right of each other in the expression Either Char Integer, thus Char and Integer will henceforth be referred to as Left and Right respectively.

Let the input to the function feedback be n.

If n<3, then we return 'F'. To denote that 'F' is a Char, we will tag 'F' as Left. (remember that Left refers to Char!)

otherwise, we will multiply n by 10 to get the percentage out of 100 (as the actual quiz is marked out of 10). To denote that the output 10*n is an Integer, we will tag it with the word Right. (remember that Right refers to Integer!)

We can also define a function from an **Either** type.

Consider the following problem: We are given a value that is either a boolean or a character. We then have to represent this value as a number.

```
top
import Data.Char(ord)

A function from an either type
representAsNumber :: Either Bool Char → Int
-- Left ~ Bool,Char ~ Right
representAsNumber ( Left bool ) = if bool then 1 else 0
representAsNumber ( Right char ) = ord char
```

This reads - "

Let representAsNumber be a function that takes either a Bool or a Char as input and returns an Int.

As Bool and Char occurs on the left and right of each other in the expression Either Bool Char, thus Bool and Char will henceforth be referred to as Left and Right respectively.

If the input to representAsNumber is of the form Left bool, we know that bool must have type Bool (as Left refers to Bool). So if the bool is True, we will represent it as 1, else if it is False, we will represent it as 0.

If the input to representAsNumber is of the form Right char, we know that char must have type Char (as Right refers to Char). So we will represent char as ord char.

u

We might make things clearer if we use a deeper level of pattern matching, like in the following function (which is equivalent to the last one).

```
another function from an either type
representAsNumber' :: Either Bool Char → Int
representAsNumber' ( Left False ) = 0
representAsNumber' ( Left True ) = 1
representAsNumber' ( Right char ) = ord char
```

x size of an either type

If a type T has n elements, and type $\mathsf{T'}$ has m elements, then how many elements does Either T $\mathsf{T'}$ have?

```
§4.2.9. The Maybe Type
```

Consider the following problem: We are asked make a function reciprocal that reciprocates a rational number, i.e., $(x \mapsto \frac{1}{x}) : \mathbb{Q} \to \mathbb{Q}$.

Sounds simple enough! Let's see -

```
\upbegin{array}{ll} \upbegin{ar
```

But there is a small issue! What about $\frac{1}{0}$?

What should be the output of reciprocal 0?

Unfortunately, it results in an error -

```
>>> reciprocal 0
*** Exception: Ratio has zero denominator
```

To fix this, we can do something like this - Let's add one *extra element* to the output type Rational, and then reciprocal 0 can have this *extra element* as its output!

So the new output type would look something like this - ({extra element} \(\text{Rational} \)

Notice that this {extra element} is a = singleton set.

Which means that if we take this *extra element* to be the value (),

and take {extra element} to be the type (),

then we can obtain ({extra element} \(\subseteq \text{Rational} \)) as the type Either () Rational.

Then we can finally rewrite \(\bar{\parabole} \) naive reciprocal to handle the case of reciprocal \(\mathrea{\parabole} \) -

```
% reciprocal using either
reciprocal :: Rational → Either () Rational
reciprocal 0 = Left ()
reciprocal x = Right (1/x)
```

There is already an inbuilt way to express this notion of Either () Rational in Haskell, which is the type Maybe Rational.

Maybe Rational just names it elements a bit differently compared to Either () Rational -

where

```
Either () Rational has Left (),
```

Maybe Rational instead has the value Nothing.

• where

```
Either () Rational has Right r (where r is any Rational),
Maybe Rational instead has the value Just r.
```

Which means that we can rewrite \(\lambda\) reciprocal using either using Maybe instead -

```
    function to a maybe type

reciprocal :: Rational → Maybe Rational
reciprocal 0 = Nothing
reciprocal x = Just (1/x)
```

But we can also do this for any arbitrary type T in place of Rational. In that case -

There is already an inbuilt way to express the notion of Either () T in Haskell, which is the type Maybe T.

Maybe T just names it elements a bit differently compared to Either () T -

where

```
Either () T has Left (),

Maybe T instead has the value Nothing.
```

• where

```
Either () T has Right t (where t is any value of type T),

Maybe T instead has the value Just t.
```

If we have a type X with elements X1, X2, and X3, and another type Y with elements Y1 and Y2, we can use the author-defined function listOfAllElements to obtain a list of all elements of certain types -

```
% elements of a maybe type
>>> listOfAllElements :: [X]
[X1,X2,X3]
>>> listOfAllElements :: [Maybe X]
[Nothing, Just X1, Just X2, Just X3]
>>> listOfAllElements :: [Y]
[Y1,Y2]
>>> listOfAllElements :: [Maybe Y]
[Nothing, Just Y1, Just Y2]
>>> listOfAllElements :: [Maybe Bool]
[Nothing, Just False, Just True]
>>> listOfAllElements :: [Maybe Char]
[Nothing, Just '\NUL', Just '\SOH', Just '\STX', Just '\ETX', . . . ]
```

x size of a maybe type

```
If a type \mathsf{T} has n elements, then how many elements does \mathsf{Maybe}\ \mathsf{T} have?
```

We can define functions to a Maybe type. For example consider the problem of making an inverse function of reciprocal, i.e., a function inverseOfReciprocal s.t.

```
\forall x::Rational , inverseOfReciprocal ( reciprocal x ) == x as follows -
```

♠ function from a maybe type

```
inverseOfReciprocal :: Maybe Rational → Rational
inverseOfReciprocal Nothing = 0
inverseOfReciprocal (Just x) = (1/x)
```

§4.2.10. Void is analogous to {} or \equiv empty set

The type Void has no elements at all.

This also means that no actual value has type Void.

Even though it is out-of-syllabus, an interesting exercise is to

x Exercise

try to define a function of type ($Bool \rightarrow Void$) $\rightarrow Void$.

§4.3. Currying

Let's try to explore some more elaborate types.

For example, let us try to find out the type of the derivative operator,

$$\frac{d}{dx}$$

Let \mathbb{D} be the set of all differentiable $\mathbb{R} \to \mathbb{R}$ functions.

Now, for any $f \in \mathbb{D}$, i.e., for any differentiable function $f : \mathbb{R} \to \mathbb{R}$, we know that $\frac{df}{dx}$ will be also be a $\mathbb{R} \to \mathbb{R}$ function.

Specifically, we could define

$$\frac{df}{dx} \coloneqq \left(p \mapsto \lim_{h \to 0} \frac{f(p+h) - f(p)}{h} \right)$$

Therefore, the function $\frac{d}{dx}$ takes an input f of type $\mathbb D$,

and produces an output $\frac{df}{dx}$ of type $\mathbb{R} \to \mathbb{R}$, which is written set-theoretically as $\mathbb{R}^{\mathbb{R}}$.

An thus we obtain the type of the derivative operator as

$$\frac{d}{dx}: \mathbb{D} \to (\mathbb{R} \to \mathbb{R})$$

or more formally,

$$\frac{d}{dx}: \mathbb{D} \to \mathbb{R}^{\mathbb{R}}$$

But we know another syntax for writing the derivative, which is -

$$\left. \frac{df}{dx} \right|_{p}$$

, which refers to the derivative evaluated at a point $p \in \mathbb{R}$.

Here, the definition could be written as

$$\left.\frac{df}{dx}\,\right|_p \coloneqq \lim_{h\to 0} \frac{f(p+h) - f(p)}{h}$$

So here there are two inputs, namely $f \in \mathbb{D}$ and $p \in \mathbb{R}$, and an output $\frac{df}{dx}\Big|_p$, which is of type \mathbb{R} .

That leads us to the type -

$$\frac{d}{dx}: \mathbb{D} \times \mathbb{R} \to \mathbb{R}$$

We understand that these two definitions are equivalent.

So now the question is, which type do we use?

High-school math usually chooses to use the $\mathbb{D} \times \mathbb{R} \to \mathbb{R}$ style of typing.

Haskell, and in several situations math as well, defaults to the $\mathbb{D} \to (\mathbb{R} \to \mathbb{R})$, or equivalently $\mathbb{D} \to \mathbb{R}^{\mathbb{R}}$ style of typing.

In general, that means that if a function $F: A \to (B \to C)$

takes an input from A,

and gives as output a $B \rightarrow C$ function,

then it is equivalent to saying $F: A \times B \to C$, which would make F a function

that takes inputs of type A and B respectively,

and gives an output of type C.

We have just seen the example where F was $\frac{d}{dx}$ and A,B,C were $\mathbb{D},\mathbb{R},\mathbb{R}$ respectively.

However, this has more profound consequences than what appears at first glance, in Haskell as well as in post-high-school mathematics.

This is due to looking in the opposite direction, i.e., taking a definition like

$$\left.\frac{df}{dx}\right|_p\coloneqq\lim_{h\to 0}\frac{f(p+h)-f(p)}{h}$$

and rephrasing it as

$$\frac{df}{dx}\coloneqq \left(p\mapsto \lim_{h\to 0}\frac{f(p+h)-f(p)}{h}\right)$$

In general, if a function $F: A \times B \rightarrow C$

takes inputs of type A and B respectively, and gives an output of type C.

then it is equivalent to saying $F:A\to (B\to C)$, which would make F a function

that takes an input from A,

and gives as output a $B \to C$ function.

⁵will be proven soon

⁶will be proven soon

This rephrasing is known as "currying".

§4.3.1. In Haskell

Again, for example,

if we have a function such as $\frac{d}{dx}$ which has 2 inputs (f and p), we can use it by only giving the first input in the following sense -

$$\frac{df}{dx} \coloneqq \left(p \mapsto \frac{df}{dx} \, \Big|_{p} \right)$$

Let's see how it works in Haskell.

• currying rule

If we have a function $\, f \,$ that takes 2 inputs (say $\, \times \,$ and $\, y$), then we can use $\, f \, \times \,$ as

```
f x = \setminus y \rightarrow f x y
```

We know that (+) is a function that takes in two Integer s and outputs an Integer.

This means that A, B, C are Integer, Integer, Integer respectively.

By currying or rephrasing, this would mean that we could treat (+) like a function that takes a single input of type Integer (i.e., A) and outputs a function of type Integer \to Integer (i.e., $B \to C$).

In fact, that's exactly what Haskell lets you do -

```
>>> :type +d (+) 17
(+) 17 :: Integer → Integer
```

Meaning that when (+) is given the Integer input 17, it outputs the function (+) 17, of type Integer \rightarrow Integer.

More explicitly, by the = currying rule, we have that

```
(+) 17 = \langle y \rightarrow (+) 17 y
```

Thus, what does this function (+) 17 actually do?

Simple! It is a function that takes in any Integer and adds 17 to it.

So, for example,

If we define -

```
test = (+) 17
```

it behaves as such -

```
>>> test 0
17
>>> test 1
18
>>> test 12
29
>>> test (-17)
0
```

Another -

```
>>> :type +d (*)
(*) :: Integer → Integer
>>> :type +d (*) 2
(*) 2 :: Integer → Integer
```

Meaning that when (*) is given the Integer input 2, it outputs the function (*) 2, of type Integer \rightarrow Integer.

More explicitly, by the 🖶 currying rule, we have that

```
(*) 2 = \setminus y \rightarrow (*) 2 y
```

Thus, the function (*) 2

takes in an Integer input

and multiplies it by 2, i.e., doubles it.

So if we define -

```
    another currying usage

doubling :: Integer → Integer

doubling = (*) 2
```

it behaves as such -

```
>>> doubling 0
0
>>> doubling 1
2
>>> doubling 12
24
>>> doubling (-17)
-34
```

§4.3.2. Understanding through Associativity

```
§4.3.2.1. Of →
```

The \oplus currying rule essentially allows us to view a function of type $A \to B \to C$ as of type $A \to (B \to C)$.

This is due to the fact that as an \oplus infix binary operator, the \longrightarrow operator is \oplus right-associative.

Recalling the definition of = right-associative, this means that,

for any X, Y, Z -

```
X \rightarrow Y \rightarrow Z
```

is actually equivalent to

```
X \rightarrow (Y \rightarrow Z)
```

And thus the 😑 currying rule is justified.

§4.3.2.2. Of Function Application

Let us take the 😑 currying rule

```
f x = \setminus y \rightarrow f x y
```

Applying a few transformations to both sides -

```
(fx) == (\y \rightarrow f x y)
-- applying both sides to y
(fx) y == (\y \rightarrow f x y) y
-- simplifying
(fx) y == f x y
-- exchanging LHS and RHS
f x y == (fx) y
```

Thus we obtain the result that any time we write

```
f x y
```

it is actually equivalent to

```
( f x ) y
```

This means that "function application" is \oplus left-associative. (Recall the definition of \oplus left-associative and see if this makes sense)

That is, if we apply a function f to 2 inputs x and y in the form f x y,

then $f \times (the application on the left)$ is evaluated first (as seen in $(f \times)y)$ and then the obtained $(f \times)$ is applied on y.

§4.3.2.3. Operator Currying Rule

We have already seen the \oplus currying rule. However it can be extended in a special way when the function is an \oplus infix binary operator.

• operator currying rule

If we have an # infix binary operator ? , then we can assume the following due to the # currying rule -

```
(?) x = \ y \rightarrow (?) x y -- the normal currying rule -- which is equivalent to (?) x = \ y \rightarrow x ? y
```

But we may further assume

```
(x?) = \ \ y \rightarrow x ? y
```

and also

```
(?y) = \ \ x \rightarrow x ? y
```

This means that while the \div currying rule allowed us to give only the *first input* (i.e., \times) and get a meaningful function out of it,

the operator currying rule further allows to do something similar by only giving the *second input* (i.e., y).

For example, -

```
>>> :type +d (^)
(^) :: Integer → Integer
>>> :type +d (^2)
(^2) :: Integer → Integer
```

Meaning that when the \oplus infix binary operator $^{\circ}$ is given the Integer input 2 in place of its second input, it outputs the function ($^{\circ}$ 2), of type Integer \rightarrow Integer.

More explicitly, by the 😑 operator currying rule -

Thus, (^2) is a function that takes an Integer x and raises to to the power of 2, i.e., squares it.

So if we define -

```
n operator currying usage
squaring :: Integer → Integer
squaring = (^2)
```

it will show the following behaviour -

```
>>> squaring 0
0
>>> squaring 1
1
>>> squaring 12
144
>>> squaring (-17)
289
```

For another example, we can define

```
nother operator currying usage
cubing :: Integer → Integer
cubing = (^3)
```

which works quite similarly.

§4.3.3. Proof of the Currying Theorem

What follows is an OPTIONAL formal rigorous proof of the following statement -

```
In general, if a function F:A\times B\to C takes inputs of type A and B respectively, and gives an output of type C. then it is equivalent to saying F:A\to (B\to C), which would make F a function that takes an input from A, and gives as output a B\to C function.
```

What we are going to prove is that

there exists a bijection

from

the set $\{F \mid F : A \times B \to C\}$

to

the set $\left\{G \mid G: A \to (B \to C), \text{ or equivalently, } G: A \to C^B \right\}$

Note that the set $\{F \mid F : A \times B \to C\}$ can be expressed as $C^{A \times B}$ and that the set $\{G \mid G : A \to C^B\}$ can be expressed as $(C^B)^A$

Therefore, we have to prove there exists a bijection : $C^{A\times B} \to \left(C^B\right)^A$

x finite currying

Is there an easy way to prove the theorem in the case that *A*, *B*, *C* are all finite sets?

Theorem \exists a bijection : $C^{A \times B} \rightarrow (C^B)^A$

Proof Define the function \mathcal{C} as follows -

$$\begin{split} \mathcal{C}: C^{A\times B} &\to \left(C^B\right)^A \\ \mathcal{C}(F) \coloneqq G \\ \text{where} \\ G: A \to C^B \\ G(a) \coloneqq \left(b \mapsto F(a,b)\right) \end{split}$$

If we can prove that \mathcal{C} is bijective, we are done!

In order to do that, we will prove that \mathcal{C} is injective as well as a surjective.

Claim : \mathcal{C} is injective

Proof:

$$\mathcal{C}(F_1) == \mathcal{C}(F_2)$$

$$\Rightarrow \qquad G_1 == G_2 \quad \text{, where } G_1(a) \coloneqq (b \mapsto F_1(a,b)) \ \text{ and } G_2(a) \coloneqq (b \mapsto F_2(a,b))$$

$$\Rightarrow \forall a \in A, \qquad G_1(a) == G_2(a), \text{ where } G_1(a) \coloneqq (b \mapsto F_1(a,b)) \ \text{ and } G_2(a) \coloneqq (b \mapsto F_2(a,b))$$

$$\Rightarrow \forall a \in A, \qquad (b \mapsto F_1(a,b)) == (b \mapsto F_2(a,b))$$

$$\Rightarrow \forall a \in A, \forall b \in B, \quad (b \mapsto F_1(a,b))(b) == (b \mapsto F_2(a,b))(b)$$

$$\Rightarrow \forall a \in A, \forall b \in B, \qquad F_1(a,b) == F_2(a,b)$$

$$\Rightarrow \forall p \in A \times B, \qquad F_1(p) == F_2(p)$$

Claim : \mathcal{C} is surjective

Proof : Take an arbitrary $H \in \left(C^B\right)^A$.

In other words, take an arbitrary function $H:A \to (B \to C)$.

 $F_1 == F_2$

Define a function J as follows -

$$J:A\times B\to C$$

$$J(a,b)\coloneqq (H(a))(b)$$

Now,

$$\begin{split} \mathcal{C}(J) &\coloneqq G \text{ , where } G(a) \coloneqq (b \mapsto J(a,b)) \\ &== G \text{ , where } G(a) \coloneqq (b \mapsto (H(a))(b)) \\ &== G \text{ , where } G(a) \coloneqq (H(a)) \qquad \left[\because (x \mapsto f(x)) \text{ is equivalent to just } f \right] \\ &== G \text{ , where } G &== H \qquad \left[\because f(x) \coloneqq g(x) \text{ means that } f == g \right] \\ &== H \end{split}$$

That means we have proved that

$$\forall H \in \left(C^B\right)^A, \exists J \text{ such that } \mathcal{C}(J) == H$$

Therefore, by the definition of surjectivity, we have proven that \mathcal{C} is surjective. As a result, we are done with the overall proof as well!

§4.4. Exercises

x Symmetric Difference

(i) Define the symmetric difference of the sets A and B as $A\Delta B=(A\setminus B)\cup(B\setminus A)$.

Prove that this is a commutative and associative operation.

(ii) The set $A_1 \Delta A_2 \Delta ... \Delta A_n$ consists of those elements that belong to an odd number of the A_i 's.

x Set of Size

(i) Give a type with exactly 32 elements. (ii) Give a type with exactly 108 elements. (iii) Give a type with exactly 19 elements.

X Unions and Intersections

Prove: (i)

$$\forall i \in I, x_i \subseteq y \Rightarrow \bigcup_{i \in I} x_i \in y$$

(ii)

$$\forall i \in I, y \subseteq y \Rightarrow y \in \bigcap_{i \in I} x_i$$

(iii)

$$\bigcup_{i \in I} (x_i \cup y_i) = \left(\bigcup_{i \in I} x_i\right) \cup \left(\bigcup_{i \in I} y_i\right)$$

(iv)

$$\bigcap_{i \in I} (x_i \cap y_i) = \left(\bigcap_{i \in I} x_i\right) \cap \left(\bigcap_{i \in I} y_i\right)$$

(v)

$$\bigcup_{i\in I}(x_i\cap y)=\left(\bigcup_{i\in I}x_i\right)\cap y$$

(vi)

$$\bigcap_{i \in I} (x_i \cup y) = \left(\bigcap_{i \in I} x_i\right) \cup y$$

X Flavoured like Curry

 $A \sim B$ means that there exists a bijection between A and B.

Prove:

(i)

$$A(B+C) \sim AB + AC$$

(ii)
$$(B \cup C)^A \sim B^A \times C^A$$
 provided $B \cap C = \emptyset$

(iii)

$$C^{A \times B} \sim C^A \times C^B$$

X Eckman-Hilton Argument

Unital Operator

A binary operator * over a set S is Unital if there exists $l,r\in S$ s.t. $\forall x\in S, l*x=x*$ r=x. (You can also prove r=l! This is why we normally label this $l=r=1_S$ in abstract algebra.)

If a set S has two unital operations \star and \cdot defined on it such that:

$$(w\cdot x)\star (y\cdot z)=(w\star x)\cdot (y\star z)$$

Prove that $\star \equiv \cdot$.

X Associative Operators

- (i) How many different associative binary logical operators can be defined? (Formally, non-isomorphic associative binary logical operators. Informally, isomorphic means "same up to relabelling."). Can you define all of them?
- (ii) Suppose we have an associative binary operator on a set S of size $0 < k < \infty$. Prove that $\exists x \in S, x \cdot x = x$.

Note: A set with an associative binary operation is called a semi-group. The first question can also be posed for a set of general size, but we don't know the answer or an algorithm to get the answer beyond sets of size 9.

X Feels Abstract

Shelf

A set with an binary operation \triangleright which left distributes over itself is called a left shelf, that is $\forall x, y, z \in S, x \triangleright (y \triangleright z) = (x \triangleright y) \triangleright (x \triangleright z)$.

A similar definition holds for right shelf and the symbol often used is \triangleleft .

(i) Prove that a unital left shelf is associative. In other words: if there exists $1_S \in S$ such that $1 \triangleright x = x \triangleright 1 = x$, then \triangleright is associative.

⇒ Rack

A rack is a set R with two operations \triangleright and \triangleleft , such that R is a left shelf over \triangleright and a right shelf over \triangleleft satisfying $x \triangleright (y \triangleleft x) = (x \triangleright y) \triangleleft x = y$.

- (ii) Prove that in a rack R, \triangleright distributes over \triangleleft and vice versa. That is, $\forall x, y, z \in R; x \triangleright (y \triangleleft z) = (x \triangleright y) \triangleleft (x \triangleright z)$.
- (iii) We call an operator \star idempotent if $x \star x = x$. If for a rack, \triangleright is idempotent; prove that \triangleleft is idempotent.

A Quandle is a rack with \triangleright and \triangleleft being idempotent.

(iv) We call an operator \star left involute if $x \star (x \star y) = y$. Prove that an idempotent, left involutive, left shelf is a quandle (recall that the shelf only has one operator, we need to somehow suitably define the other operation. Maybe do problem (v) for a hint?)

Kei

An involutive quandle is called a Kei

(v) Prove that the set of points on the real plane with $x \triangleright y$ being the reflection of y over x is a Kei.

Note: Shelves, Racks, Quandles and Kai's are slowly entering mainstream math as ways to work with operations on exotic sets like set of knots or set of colorings of primes etc. The theory of Kai in this regard was formalized very recently (2024) by Davis and Schlank in "Arithmetic Kei Theory". The main use is still Knot Theory, but we would not be surprised to see it used in a number theory proof. A reference for this, and a pre-req for Davis and Schlank, is "Quandles" by Mohamed Elhamdadi and Sam Nelson.


X Enumerating the Rationals

- (i) Prove that \mathbb{Z} is countable, that is there is a surjection from $\mathbb{N} \to \mathbb{Z}$.⁷
- (ii) Now write functions : $natToInt :: Integer \rightarrow Integer$ and $intToNat :: Integer \rightarrow Integer$ which takes a natural number and gives the corresponding integer and vice versa.
- (iii) Prove that $\mathbb{N} \times \mathbb{N}$ is countable, that is there is a bijection between $\mathbb{N} \to \mathbb{N} \times \mathbb{N}$. While other arguments exist, we are big fans of enumerating in the order $(0,0) \to (0,1) \to (1,0) \to (0,2) \to (1,1) \to (2,0) \to \dots$ What is the pattern?
- (iv) Now write a function intToPair :: Int \rightarrow (Int, Int) which takes an integer and gives the corresponding rational and a function pairToInt :: (Int, Int) \rightarrow Int which takes a pair and returns the corresponding integer.

X Calkin-Wilf Tree

Using the above exercise, we can see that $\mathbb{N} \times \mathbb{N}$ is 'larger's than \mathbb{Q}^+ , so we can claim that rationals are countable. We will attempt to prove that as well as enumerate the rationals.

- (i) Prove that if $\frac{p}{q}$ is reduced, then $\frac{p+q}{q}$ and $\frac{p}{p+q}$ are reduced.
- (ii) Prove that starting with $\frac{1}{1}$ and making the following tree by applying the above transformation will contain every rational:

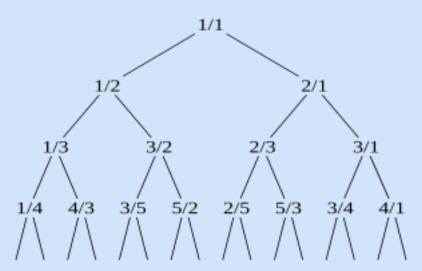

(iii) Labeling the tree level by level, write a function $natToRat :: Int \rightarrow (Int, Int)$ which takes an natural number and gives the positive rational enumerates. (An approach could be to notice that we can represent the path one takes down the tree in binary)

(iv) Write a function ratToNat :: (Int, Int) \rightarrow Int which takes a positive rational number and gives its position in the naturals.

⁷This may seem counterintuitive as the integers feel twice as large but they really are not

⁸It is not as you will see in a moment,

Introduction to Lists

A list is an ordered collection of objects, possibly with repetitions, denoted by

```
[\ \operatorname{object}_0\ ,\ \operatorname{object}_1\ ,\ \operatorname{object}_2\ ,\dots\ ,\ \operatorname{object}_{n-1}\ ,\ \operatorname{object}_n\ ]
```

These objects are called the elements of the list.

In Haskell, the elements of a particular list all have to have the same type.

Thus, a list such as [1,2,True,4] is not allowed.

§5.1. Type of List

If the elements of a list each have type T, then the list is given the type [T].

```
>>> :type +d [1,2,3]
[1,2,3] :: [Integer]
>>> :type +d ['a','Z','\STX']
['a','Z','\STX'] :: [Char]
>>> :type +d [True,False]
[True,False] :: [Bool]
```

§5.2. Creating Lists

There are several nice ways to create a list in Haskell.

§5.2.1. Empty List

The most basic approach is to create the empty list (a list containing no elements) by writing [].

§5.2.2. Arithmetic Progression

Haskell has some luxurious syntax for declaring lists containing arithmetic progressions -

```
% arithmetic progression syntax
>>> [1..6]
[1,2,3,4,5,6]
>>> [1,3..6]
[1,3,5]
>>> [1,-3..-10]
[1,-3,-7]
>>> [0.5..4.9]
[0.5,1.5,2.5,3.5,4.5]
```

But, very usefully, it just doesn't work for numbers, but other types as well.

```
non-number arithmetic progressions
>>> [False ..True]
[False,True]
>>> ['a'..'z']
"abcdefghijklmnopqrstuvwxyz"
```

§5.3. Functions on Lists

Now that we know how to create a list, how do we manipulate them into the data that we would want?

§5.3.1. List Comprehension

Well, the way we achieve this in sets is through set comprehension.

When we want the set of squares of the even natural numbers $\leq n$, we write -

$$\{m^2 \mid m \in \{0, 1, 2, 3, ..., n - 1, n\}, 2 \text{ divides } m\}$$

Haskell lets us do the same with lists -

```
>>> n = 10
>>> [ m*m | m \leftarrow [0..n] , m `mod` 2 == 0 ]
[0,4,16,36,64,100]
```

When we want the set of pairs of numbers $\leq n$ whose highest common factor is 1, we write -

$$\{(x,y) \mid x,y \in \{0,1,2,3,...,n-1,n\}, HCF(x,y) == 1\}$$

,which can be expressed in haskell as

```
>>> n = 10

>>> [ (x,y) | x \leftarrow [1..n] , y \leftarrow [1..n] , gcd x y == 1 ]

[(1,1),(1,2),(1,3),(1,4),(1,5),(1,6),(1,7),(1,8),(1,9),(1,10),(2,1),(2,3),(2,5),(2,7),(2,9),(3,1),(3,2),(3,4),(3,5),(3,7),(3,8),(3,10),(4,1),(4,3),(4,5),(4,7),(4,9),(5,1),(5,2),(5,3),(5,4),(5,6),(5,7),(5,8),(5,9),(6,1),(6,5),(6,7),(7,1),(7,2),(7,3),(7,4),(7,5),(7,6),(7,8),(7,9),(7,10),(8,1),(8,3),(8,5),(8,7),(8,9),(9,1),(9,2),(9,4),(9,5),(9,7),(9,8),(9,10),(10,1),(10,3),(10,7),(10,9)]
```

```
§5.3.2. Cons or (:)
```

The operator : (read as "cons") can be used to add a single element to the the beginning of a list.

```
>>> 5 : [8,2,3,0]
[5,8,2,3,0]
>>> 1 : [2,3,4]
[1,2,3,4]
>>> 7 : [10,2,35,92]
[7,10,2,35,92]
>>> True : [False,True,True,False]
[True,False,True,True,False]
```

However, the : operator is much more special than it appears, since -

- It can be used to pattern match lists
- It is how lists are defined in the first place

So, how can we use it for pattern matching?

```
pattern matching lists

>>> (x:xs) = [5,8,3,2,0]

>>> x
5

>>> xs
[8,3,2,0]
```

When we use the pattern (x:xs) to refer to a list, x refers to the first element of the list, and xs refers to the list containing the rest of the elements.

§5.3.3. Length

One of the most basic questions we could ask about lists is the number of elements they contain. The length function gives us that answers, counting repetitions as separate.

```
>>> length [5,5,5,5,5,5]
6
>>> length [5,8,3,2,0]
5
>>> length [7,10,2,35,92]
5
>>> length [False,True,False]
4
```

Ans we can use pattern matching to define it -

```
length of list
length [] = 0
length (x:xs) = 1 + length xs
```

This reads - "If the list is empty, then length is 0.

```
If the list has a first element x, then the length is 1 + length of the list of the rest of the elements."
```

§5.3.4. Concatenate or (++)

The ++ (read as "concatenate") operator can be used to join two lists together.

```
>>> [5,8,2,3,0] ++ [122,32,44]
[5,8,2,3,0,122,32,44]
>>> [False,True,True,False] ++ [True,False,True]
[False,True,True,False,True,False,True]
```

Again, we can define it by using pattern matching

```
% concatenation of lists
[] ++ ys = ys
(x:xs) ++ ys = x : ( xs ++ ys )
```

This reads - "Suppose we are concatenating a list to the front of the list ys.

If the list is empty, then of course the answer is just ys.

If the list has a first element x, and the rest of the elements form a list xs, then we can first concatenate xs and ys, and then add x at the beginning of the resulting list. "

§5.3.5. Head and Tail

The head function gives the first element of a list.

```
>>> head [5,8,3,2,0]
5
>>> head [7,10,2,35,92]
7
>>> head [False,True,True,False]
False
```

And it can be defined using pattern-matching -

```
head of list
head (x:xs) = x
```

The tail function provides the rest of the list after the first element.

```
>>> tail [5,8,3,2,0]
[8,3,2,0]
>>> tail [7,10,2,35,92]
[10,2,35,92]
>>> tail [False,True,True,False]
[True,True,False]
```

And it can be defined using pattern-matching -

```
tail of list
tail (x:xs) = xs
```

But how are these functions supposed to work if there is no first element at all, such as in the case of []? They produce errors when applied to the empty list! -

```
>>> head []
*** Exception: Prelude.head: empty list
CallStack (from HasCallStack):
    error, called at libraries\base\GHC\List.hs:1644:3 in base:GHC.List
    errorEmptyList, called at libraries\base\GHC\List.hs:87:11 in
base:GHC.List
    badHead, called at libraries\base\GHC\List.hs:83:28 in base:GHC.List
    head, called at <interactive>:6:1 in interactive:Ghci6

>>> tail []
*** Exception: Prelude.tail: empty list
CallStack (from HasCallStack):
    error, called at libraries\base\GHC\List.hs:1644:3 in base:GHC.List
    errorEmptyList, called at libraries\base\GHC\List.hs:130:28 in
base:GHC.List
    tail, called at <interactive>:7:1 in interactive:Ghci6
```

Note that, in our definitions, we have not handled the case of the input being []!

So, it is advised to use the function uncons from Data.List, which adopts the philosophy we saw in function to a maybe type, which is

if the function gives an error, output Nothing instead of the error

Thus, for non-empty 1, uncons 1 returns Just (head 1, tail 1), and when 1 is empty, uncons 1 returns Nothing.

Let's test this in GHCi -

```
>>> import Data.List
>>> uncons [5,8,3,2,0]
Just (5,[8,3,2,0])
>>> uncons []
Nothing
```

And the definition -

```
wuncons of list
uncons [] = Nothing
uncons (x:xs) = Just ( x , xs )
```

Also consider the functions safeHead and safeTail from Distribution.Simple.Utils.

§5.3.6. Take and Drop

There are some "generalized" functions corresponding to head and tail, namely take and drop, take n l gives the first n elements of l.

```
>>> take 3 [5,8,3,2,0]
[5,8,3]
>>> take 4 [7,10,2,35,92]
[7,10,2,35]
>>> take 2 [False,True,True,False]
[False,True]
```

And the definition -

This reads - "If we take only o elements, the result will of course be the empty list [].

If we want to take n elements, then we can take the first element and then the first n-1 elements from the rest.

But why the last line of the definition? "The last line of the function may look strange, but -

x Exercise

Explain why, without the last line of the definition, the function might give an unexpected error.

drop n l gives l, excluding the first n elements.

```
>>> drop 3 [5,8,3,2,0]
[2,0]
>>> drop 4 [7,10,2,35,92]
[92]
>>> drop 2 [False,True,False]
[True,False]
```

And the definition -

x Exercise

Prove that the above definition works as told in the description of the functionality of the drop function.

The splitAt function combines these two functionalities by returning both answers in a pair.

```
That is; splitAt n l == ( take n l , drop n l )
```

```
>>> splitAt 3 [5,8,3,2,0] ([5,8,3],[2,0])
```

```
§5.3.7. (!!)
```

The !! (read as bang-bang) operator takes a list and a number n::Int, and returns the n^{th} element of the list, counting from 0 onwards.

```
>>> [5,8,3,2,0] !! 0
5
>>> [5,8,3,2,0] !! 1
8
>>> [5,8,3,2,0] !! 2
3
>>> [5,8,3,2,0] !! 3
2
>>> [5,8,3,2,0] !! 4
0
```

But what happens if n is not between 0 and length 1?

Error!

```
>>> [5,8,3,2,0] !! (-1)
*** Exception: Prelude.!!: negative index
CallStack (from HasCallStack):
    error, called at libraries\base\GHC\List.hs:1369:12 in base:GHC.List
    negIndex, called at libraries\base\GHC\List.hs:1373:17 in base:GHC.List
    !!, called at <interactive>:8:13 in interactive:Ghci6

>>> [5,8,3,2,0] !! 5

*** Exception: Prelude.!!: index too large
CallStack (from HasCallStack):
    error, called at libraries\base\GHC\List.hs:1366:14 in base:GHC.List
    tooLarge, called at libraries\base\GHC\List.hs:1376:50 in base:GHC.List
!!, called at <interactive>:9:13 in interactive:Ghci6
```

So, again, it is advised to avoid using the !! operator.

x Exercise

Provide a definition for the !! operator.

```
§5.3.8. List → Bool
```

Functions on lists that return Bool are used to check whether lists satisfy certain properties or not. For example -

```
§5.3.8.1. Elem
```

The elem function is used to determine whether a list contains a particular object.

The elem function takes a value and a list, and answers whether the value appears in the list or not, answering in either True or False.

```
>>> elem 5 [5,8,3,2,0]
True
>>> elem 8 [5,8,3,2,0]
True
>>> elem 3 [5,8,3,2,0]
True
>>> elem 2 [5,8,3,2,0]
True
>>> elem 0 [5,8,3,2,0]
True
>>> elem 7 [5,8,3,2,0]
False
>>> elem 6 [5,8,3,2,0]
```

And the definition -

>>> elem 4 [5,8,3,2,0]

False

False

```
elem x [] = False
elem x (y:ys) = x == y || elem x ys
```

This reads - " x does not appear in the empty list.

x appears in a list if and only if it is equal to the first element or it appears somewhere in the rest of the list. "

§5.3.8.2. Generalized Logical Operators

The binary (taking 2 Bool inputs) logical operators like && and | can be be generalized to take a list of inputs [Bool].

```
and and :: [Bool] \rightarrow Bool and (b:bs) = b && (and bs) and [] = True
```

The and function takes as input a list of type [Bool] and answers whether ALL of the elements of the list are True.

A few examples -

```
>>> and [True, True, True]
True
>>> and [True, False, True]
False
>>> and []
True
>>> and [False, False, False]
False
>>> and [True && False, True]
False
```

Let's generalize | as well.

```
or :: [Bool] → Bool
  or (b:bs) = b || ( or bs )
  or [] = False
```

The or function takes as input a list of type [Bool] and answers whether ANY of the elements of the list is True.

```
>>> or [False, False, True]
True
>>> or [False, False, False]
False
>>> or []
False
>>> or [True, True, False]
True
>>> or [not True, not False]
True
```

x base cases of list-ary logical operators

Try to justify why the definitions and [] = True and or [] = False are required.

§5.4. Strings

A string is how we represent text (like English sentences and words) in programming.

Like many modern programming languages, Haskell defines a string to be just a list of characters.

In fact, the type String is just a way to refer to the actual type [Char].

So, if we want write the text "hello there!", we can write it in GHCi as ['h','e','l','o','','t','h','e','r','e','!'].

Let's test it out -

```
>>> ['h','e','l','l','o',' ','t','h','e','r','e','!']
"hello there!"
```

But we see GHCi replies with something much simpler - "hello there!"

This simplified form is called syntactic sugar. It allows us to read and write strings in a simple form without having to write their actual verbose syntax each time.

So, we can write -

```
>>> "hello there!"
"hello there!"

>>> :type +d "hello there!"
"hello there!" :: String
```

The type String is just a way to refer to the actual type [Char].

And since strings are just lists, all the list functions apply to strings as well.

```
>>> 'h' : "ello there!"
"hello there!"
>>> "hello " ++ "there!"
"hello there!"
>>> head "hello there!"
'h'
>>> tail "hello there!"
"ello there!"
>>> take 5 "hello there!"
"hello"
>>> drop 5 "hello there!"
" there!"
>>> elem 'e' "hello there!"
True
>>> elem 'w' "hello there!"
False
>>> "hello there!" !! 7
'h'
>>> "hello there!" !! 6
't'
```

But there are some special functions just for strings -

words breaks up a string into a list of the words in it.

```
>>> words "hello there!"
["hello","there!"]
```

And unwords combines the words back into a single string.

```
>>> unwords ["hello","there!"]
"hello there!"
```

lines breaks up a string into a list of the lines in it.

```
>>> lines "hello there!\nI am coding..."
["hello there!","I am coding..."]
```

Ans unlines combines the lines back into a single string.

```
>>> unlines ["hello there!","I am coding..."]
"hello there!\nI am coding...\n"
```

§5.5. Structural Induction for Lists

Suppose we wan prove some fact about lists.

We can use the following version of the 😑 principle of mathematical induction -

structural induction for lists

Suppose for each list 1 of type $\ [\top]$, we have a statement φ_1 . If we can pore the following two statements -

- φ_Γ
- For each list of the form (x:xs), if φ_{xs} is true, then $\varphi_{(x:xs)}$ is also true.

then φ_1 for all finite lists 1.

Let use this principle to prove that

```
Theorem The definition of length terminates on all finite lists.

Proof Let \varphi_{\mathbb{T}} be the statement

The definition of length l terminates.

To use \Rightarrow structural induction for lists, we need to prove -

• \langle\langle\varphi_{\mathbb{T}}\rangle\rangle
The definition of length [] directly gives 0.

• \langle\langle For each list (x:xs), if \varphi_{xs}, then \varphi_{(x:xs)} also. \rangle\rangle
Assume \varphi_{xs} is true.

The definition for length (x:xs) is 1 + \text{length } xs.

By \varphi_{xs}, we know that length xs will finally give return some number xs.

Therefore xs reduces to x
```

§5.6. Sorting

```
sorted list
```

```
A list is said to be sorted if and only if its elements appear in ascending order of their values.  
OR EQUIVALENTLY

A list [x_1, x_2, x_3, \dots, x_{n-1}, x_n] is said to be sorted if and only if x_1 \leq x_2 \leq x_3 \leq \dots \leq x_{n-1} \leq x_n

OR EQUIVALENTLY

A list [x_1, x_2, x_3, \dots, x_{n-1}, x_n] is said to be sorted if and only if (x_1 \leq x_2) \otimes (x_2 \leq x_3) \otimes (x_3 \leq x_4) \otimes (x_{n-1} \leq x_n)
```

Here are a few examples of = sorted lists -

```
[1, 2, 3, 4, 5]
[0, 10, 20, 30, 40]
[-10, -5, 0, 5, 10]
[2, 3, 5, 7, 11, 13, 17]
[100, 200, 300, 400, 500]
[-100, -50, -10, -1, 0, 1, 10]
[1, 1, 2, 3, 5, 8, 13]
```

and here are few which are NOT = sorted lists -

```
[5, 2, 4, 1, 3]

[30, 10, 40, 0, 20]

[10, -5, 0, -10, 5]

[11, 2, 17, 5, 13, 3, 7]

[500, 100, 300, 200, 400]

[10, -1, -100, 0, -50, -10, 1]

[8, 1, 13, 5, 3, 1, 2]
```

Let's write a function that takes a list of and answers whether it is a 🖶 sorted list or not -

```
isSorted [] = True
isSorted [x] = True
isSorted (x:x':xs) = ( x \le x' ) && ( isSorted (x':xs) )
```

This reads - "A list which contains nothing is a = sorted list.

A list containing exactly one element is also a = sorted list.

If the first two elements of the list are \times and \times' and the rest of the elements form a list \times s, then the list is sorted if and only if

```
x \le x' AND the list x':xs (i.e., the \lambda tail of list x:x':xs, the given input) is sorted. "
```

Now we introduce an infamous problem in computer science, "sorting"!

```
* sorting

Sorting is the act of taking a given list and rearranging the contained elements so that it becomes a * sorted list.
```

In Haskell, we do this using the sort function.

```
>>> sort [5, 2, 4, 1, 3]
[1,2,3,4,5]
>>> sort [30, 10, 40, 0, 20]
[0,10,20,30,40]
>>> sort [10, -5, 0, -10, 5]
[-10,-5,0,5,10]
>>> sort [11, 2, 17, 5, 13, 3, 7]
[2,3,5,7,11,13,17]
>>> sort [500, 100, 300, 200, 400]
[100,200,300,400,500]
>>> sort [10, -1, -100, 0, -50, -10, 1]
[-100,-50,-10,-1,0,1,10]
>>> sort [8, 1, 13, 5, 3, 1, 2]
[1,1,2,3,5,8,13]
```

Let us see whether we can define the sort function.

Well, it is obvious that

```
sort [] = []
```

So we are left with defining sort (x:xs).

In the style of recursive definitions, we can assume that we already have sort xs computed.

i.e., let us define

```
sortedTail = sort xs
```

and we can henceforth use sortedTail to refer to sort xs.

Now, sortedTail, being sort xs, contains all the elements of xs, rearranged in ascending order. But it doesn't contain x.

If we were able to include x in sortedTail without disturbing this ascending order, we would be done!

So let's do that -

First we take those elements of sortedTail which should appear before \times in the ascending order. (i.e., the elements $< \times$)

```
[e | e ← sortedTail , e < x]
```

Then we follow that with \times itself.

```
[e | e ← sortedTail , e < x] ++ [x]
```

And then we add the elements of sortedTail that should appear after x in the ascending order. (i.e., the elements $\ge x$)

```
[e | e \leftarrow sortedTail , e < x] ++ [x] ++ [e | e \leftarrow sortedTail , e \geqslant x]
```

And thus we obtain a list containing x as well as all the elements of sortedTail, arranged in ascending order, i.e., sort (x:xs)

Putting it all together, we can write a definition for sort as follows -

```
sort
sort [] = []
sort (x:xs) = let sortedTail = sort xs in
[e | e ← sortedTail , e < x] ++ [x] ++ [e | e ← sortedTail , e ≥ x]</pre>
```

Let's see an example computation -

```
sort [5, 1, 13, 8, 3, 1, 2]

== let sortedTail = sort [1, 13, 8, 3, 1, 2] in
    [e | e ← sortedTail , e < 5] ++ [5] ++ [e | e ← sortedTail , e ≥ 5]

== let sortedTail = [1,1,2,3,8,13] in
    [e | e ← sortedTail , e < 5] ++ [5] ++ [e | e ← sortedTail , e ≥ 5]

== let sortedTail = [1,1,2,3,8,13] in
    [1,1,2,3] ++ [5] ++ [e | e ← sortedTail , e ≥ 5]

== let sortedTail = [1,1,2,3,8,13] in
    [1,1,2,3] ++ [5] ++ [8,13]

== [1,1,2,3] ++ [5] ++ [8,13]

== [1,1,2,3,5,8,13]</pre>
```

§5.7. Optimization

Suppose we want to reverse the the order of elements in a list.

For example, transforming the list [5,8,3,2,0] into [0,2,3,8,5].

So how do we define the function reverse?

An obvious definition is -

```
naive reverse
reverse [] = []
reverse (x:xs) = ( reverse xs ) ++ [x]
```

But this is not "optimal".

What does this mean? Let's see -

Let's apply the definitions of reverse and (+) to see how reverse [5,8,3] is computed -

```
reverse [5,8,3] == (reverse [8,3]) ++ [5]
            == ( (reverse [3]) ++ [8]) ++ [5]
            == ( ( ( reverse [] ) ++ [3] ) ++ [8] ) ++ [5]
            == ( ( [] ++ [3] ) ++ [8] ) ++
                                                   [5]
            == (
                      [3] ++
                                   [8] ) ++
                                                   [5]
                       3 : ([] ++ [8] ) ) ++
            == (
                                                   [5]
                          :
                                    [8] ) ++
                                                   [5]
            == (
                       3
                       3
                         : (
                                    [8] ++
                                                   [5])
                       3
                         : (
                              8 : ([] ++ [5] ))
                       3
                           : (
                                   8 :
                                                   [5]
             -- which finally is
                   [3,8,5]
```

So we see that this takes 10 steps of computation.

Let us take an alternative definition of reverse -

```
reverse l = help [] l where
help xs (y:ys) = help (y:xs) ys
help xs [] = xs
```

Let us how this one is computed step by step -

```
reverse [5,8,3] == help [] [5,8,3]

== help [5] [8,3]

== help [8,5] [3]

== help [3,8,5] []

== [3,8,5]
```

So we see this computation takes only 5 steps, as compared to 10 from last time.

So, in some way, the second definition is better as it requires much less steps.

We can comment on something similar for splitAt

```
naive splitAt
splitAt n l = ( take n l , drop n l )

optimized splitAt

splitAt n [] = ( [] , [] )
splitAt n (x:xs) = ( x:ys , zs ) where
    (ys,zs) = splitAt (n-1) xs
```

x Exercise

- (1) Prove that the two definitions are equivalent using = structural induction for lists.
- (2) See which definition takes more steps to compute splitAt 2 [5,8,3]


§5.8. Lists as Syntax Trees

Recall = abstract syntax tree.

Remember that we represent f(x,y) as $\left\langle \begin{array}{c} f \\ x & y \end{array} \right\rangle$

Using this rule, see whether the following steps make sense -

In fact any list $[x_1, x_2, x_3, ..., x_n]$ can be represented as



This is the representation that Haskell actually uses to store lists.

§5.9. Dark Magic

We can use our arithmetic progression notation to generate infinite arithmetic progressions.

```
>>> [0..]

[0,1,2,3,4,5,6,7,8,9,...]

>>> [2,5..]

[2,5,8,11,14,17,20,23,26,29,...]
```

We can define infinite lists like -

a list of infinitely many 0 s -

```
zeroes = 0 : zeroes

>>> zeroes
[0,0,0,0,0,0,0,0,0,0,...]
```

the list of all natural numbers -

```
naturals = l 0 where l n = n : l (n+1)
>>> naturals
[0,1,2,3,4,5,6,7,8,9, ...]
```

and the list of all fibonacci numbers -

```
fibs = l 0 1 where l a b = a : l b (a+b)

>>> fibs
[0,1,1,2,3,5,8,13,21,34,...]
```

Since we obviously cannot view the entirety of an infinite list, it is advisable to use the \(\lambda\) take from list function take to view an initial section of the list, rather than the whole thing.

§5.9.1. Exercises

X Balloons

In an ICPC contest, balloons are distributed as follows:

- Whenever a team solves a problem, that team gets a balloon.
- The first team to solve a problem gets an additional balloon.

A contest has 26 problems, labelled A,B,...,Z. You are given the order of solved problems in the contest, denoted as a string s, where the i-th character indicates that the problem s_i has been solved by some team. No team will solve the same problem twice.

Write a function balloons :: String \rightarrow Int to determine the total number of balloons used in the contest. Note that some problems may be solved by none of the teams.

Example:

```
balloons "ABA" = 5
balloons "A" = 2
balloons "ORZ" = 6
balloons "BAAAA" = 7
balloons "BAAAA" = 7
balloons "BKPT" = 8
balloons "BKPT" = 8
balloons "HASKELL" = 13
```

X Neq Array (INOI 2025 P1)

Given a list A of length N, we call a list of integers B of length N such that:

- All elements of B are positive, ie $\forall 1 \leq i \leq N, B_i > 0$
- B is non-decreasing, ie $B_1 \leq B_2 \leq ... \leq B_N$
- $\forall 1 \leq i \leq N, B_i \neq A_i$

Let neq(A) denote the minimum possible value of the last element of B for a valid array B.

Write a function $neq :: [Int] \rightarrow Int$ that takes a list A and returns the neq(A).

Example:

```
neq [2,1] = 2
neq [1,2,3,4] = 5
neq [2,1,1,3,2,1] = 3
```

X Kratki (COCI 2014)

Given two integers N and K, write a function $krat :: Int \to Int \to Maybe [Int]$ which constructs a permutation of numbers from 1 to N such that the length of its longest monotone subsequence (either ascending or descending) is exactly K or declare that the following is not possible.

A monotone subsequence is a subsequence where elements are either in non-decreasing order (ascending) or non-increasing order (descending).

Example:

```
krat 4 3 = Just [1,4,2,3]
krat 5 1 = Nothing
krat 5 5 = Just [1,2,3,4,5]
```

For example 1: The permutation (1, 4, 2, 3) has longest ascending subsequence (1, 2, 3) of length 3, and no longer monotone subsequence exists. For example 2: It's impossible to create a permutation of 5 distinct numbers with longest monotone subsequence of length 1. For example 3: The permutation (1, 2, 3, 4, 5) itself is the longest monotone subsequence of length 5.

X Putnik (COCI 2013

Chances are that you have probably already heard of the traveling salesman problem. If you have, then you are aware that it is an NP-hard problem because it lacks an efficient solution. Well, this task is an uncommon version of the famous problem! Its uncommonness derives from the fact that this version is, actually, solvable.

Our vacationing mathematician is on a mission to visit N cities, each exactly once. The cities are represented by numbers 1, 2, ..., N. What we know is the direct flight duration between each pair of cities. The mathematician, being the efficient woman that she is, wants to modify the city visiting sequence so that the total flight duration is the minimum possible.

Alas, all is not so simple. In addition, the mathematician has a peculiar condition regarding the sequence. For each city labeled K must apply: either all cities with labels smaller than K have been visited before the city labeled K or they will all be visited after the city labeled K. In other words, the situation when one of such cities is visited before, and the other after is not allowed.

Assist the vacationing mathematician in her ambitious mission and write a function $time :: [[Int]] \rightarrow Int$ to calculate the minimum total flight duration needed in order to travel to all the cities, starting from whichever and ending in whichever city, visiting every city exactly once, so that her peculiar request is fulfilled. Example:

```
time [
  [0,5,2],
  [5,0,4],
  [2,4,0]] = 7

time [
  [0,15,7,8],
  [15,0,16,9],
  [7,16,0,12],
  [8,9,12,0]] = 31
]
```

In the first example: the optimal sequence is 2, 1, 3 or 3, 1, 2. The sequence 1, 3, 2 is even more favourable, but it does not fulfill the condition. In the second example: the sequence is either 3, 1, 2, 4 or 4, 2, 1, 3.

X Look and Say

Look-and-say sequences are generated iteratively, using the previous value as input for the next step. For each step, take the previous value, and replace each run of digits (like 111) with the number of digits (3) followed by the digit itself (1).

For example:

- 1 becomes 11 (1 copy of digit 1).
- 11 becomes 21 (2 copies of digit 1).
- 21 becomes 1211 (one 2 followed by one 1).
- 1211 becomes 111221 (one 1, one 2, and two 1s).
- 111221 becomes 312211 (three 1s, two 2s, and one 1).

Write function lookNsay :: Int \rightarrow Int which takes an number and generates the next number in its look and say sequence.

X Triangles (Codeforces 1119E)

Pavel has several sticks with lengths equal to powers of two. He has a_0 sticks of length $2^0=1$, a_1 sticks of length $2^1=2$, ..., a_n sticks of length 2^n .

Pavel wants to make the maximum possible number of triangles using these sticks. The triangles should have strictly positive area, each stick can be used in at most one triangle.

It is forbidden to break sticks, and each triangle should consist of exactly three sticks. Write a function triangles :: [Int] \rightarrow Int] to find the maximum possible number of triangles.

Examples

```
triangles [1,2,2,2,2] = 3
triangles [1,1,1] = 0
triangles [3,3,3] = 1
```

In the first example, Pavel can, for example, make this set of triangles (the lengths of the sides of the triangles are listed): $(2^0, 2^4, 2^4), (2^1, 2^3, 2^3), (2^1, 2^2, 2^2)$.

In the second example, Pavel cannot make a single triangle.

In the third example, Pavel can, for example, create this set of triangles (the lengths of the sides of the triangles are listed): $(2^0, 2^0, 2^0)$, $(2^1, 2^1, 2^1)$, $(2^2, 2^2, 2^2)$.

X Thanos Sort (Codeforces 1145A)

Thanos sort is a supervillain sorting algorithm, which works as follows: if the array is not sorted, snap your fingers* to remove the first or the second half of the items, and repeat the process.

* Infinity Gauntlet required.

Examples

```
thanos [1,2,2,4] = 4
thanos [11, 12, 1, 2, 13, 14, 3, 4] = 2
thanos [7,6,5,4] = 1
```

In the first example the list is already sorted, so no finger snaps are required.

In the second example the list actually has a sub-array of 4 sorted elements, but you can not remove elements from different sides of the list in one finger snap. Each time you have to remove either the whole first half or the whole second half, so you'll have to snap your fingers twice to get to a 2-element sorted list.

In the third example the list is sorted in decreasing order, so you can only save one element from the ultimate destruction.

X Deadfish

Deadfish XKCD is a fun, unusual programming language. It only has one variable, called s, which starts at 0. You change s by using simple commands.

Your task is to write a Haskell program that reads Deadfish XKCD code from a file, runs it, and prints the output.

Deadfish XKCD has the following commands:

Command	What It Does
X	Add 1 to s .
k	print s as a number.
С	Square s,
d	Subtract 1 from s .
X	Start defining a function (the next character is the function name).
K	Print s as an ASCII character.
С	End the function definition or run a function.
D	Reset s back to 0.
{}	Everything inside curly braces is considered a comment.

Extra Rules:

- s must stay between 0 and 255.
- If s goes above 255 or below 0, reset it back to 0.
- Ignore spaces, newlines, and tabs in the code.
- Other characters (not commands) work differently depending on the subtask.

While you can do the whole exercise in one go, we recommend doing the following subtasks in order.

1. Basic (x, k, c, d only)

```
run "xxcxkdk" = "54"
```

2. Extended (add K, D)

```
run "xxcxxxxxxxxxxxxx" = "H"
```

3. Functions (all commands)

```
run "XUxkCxxCUCUCU" = "345"
```

4. Comments (ignore {})

Ignore content inside curly braces.

Hint: Don't be afraid to use tuples!

X Weakness and Poorness (Codeforces 578C)

You are given a sequence of n integers $a_1, a_2, ..., a_n$.

Write a function solve :: [Int] \to Float to determine a real number x such that the weakness of the sequence $a_1-x,a_2-x,...,a_n-x$ is as small as possible.

The weakness of a sequence is defined as the maximum value of the poorness over all segments (contiguous subsequences) of a sequence.

The poorness of a segment is defined as the absolute value of sum of the elements of segment.

Examples

```
solve [1,2,3] = 2.0
solve [1,2,3.4] = 2.5
```

Note For the first case, the optimal value of x is 2 so the sequence becomes -1, 0, 1 and the max poorness occurs at the segment -1 or segment 1.

For the second sample the optimal value of x is 2.5 so the sequence becomes -1.5, -0.5, 0.5, 1.5 and the max poorness occurs on segment -1.5, -0.5 or 0.5, 1.5.

X Group

Write function group :: $[a] \rightarrow [[a]]$ which groups adjacent equal elements. For example:

```
group [1,1,1,2,4,8,8,8,8,10,10] = [[1,1,1],[2],[4],[8,8,8,8],[10,10]]
group "haskell" = ["h","a","s","k","e","ll"]
```

Polymorphism and Higher Order Functions

§6.1. Polymorphism

§ 6.1.1. Classification has always been about shape and behvaiour anyway

Functions are our way, to interact with the elements of a type, and one can define functions in one of the two following ways:

- 1. Define an output for every single element.
- 2. Consider the general property of elements, that is, how they look like, and the functions defined on them.

And we have seen how to define functions from a given type to another given type using the above ideas, for example:

nand is a function that accepts 2 Bool values, and checks if it at least one of them is False. We will show two ways to write this function.

The first is too look at the possible inputs and define the outputs directly:

```
nand :: Bool → Bool → Bool
nand False _ = True
nand True True = False
nand True False = True
```

The other way is to define the function in terms of other functions and how the elements of the type Bool behave

```
nand :: Bool \rightarrow Bool \rightarrow Bool nand a b = not (a && b)
```

The situation is something similar, for a lot of other types, like Int, Char and so on.

But with the addition of the List type from the previous chapter, we were able to add *shape* to the elements of a type, in the following sense:

Consider the type [Integer], the elements of these types are lists of integers, the way one would interact with these would be to treat it as a collection of objects, in which each element is an integer.

- A function for lists would thus have 2 components, at least conceptually if not explicit in the code itself:
 - The first being that of a list, which can be interacted with using functions like head.
 - The second being that of Integer , So that functions on Integer can be applied to the elements of the list.

consider the following example:

```
squaring all elements of a list
squareAll :: [Integer] → [Integer]
squareAll [] = []
squareAll (x : xs) = x * x : squareAll xs
```

Here, in the definition when we match patterns, we figure out the shape of the list element, and if we can extract an integer from it, then we square it and put it back in the list.

Something similar can be done with the type [Bool]:

- Once again, to write a function, one needs to first look at the *shape* an element as a list, Then pick elements out of them and treat them as **Bool** elements.
- An example of this will be the and function, that takes in a collection of Bool and returns True if and only if all of them are True.

```
and :: [Bool] → Bool
and [] = True -- We call scenarios like this 'vacuously true'
and (x : xs) = x && and xs
```

Once again, the pattern matching handles the shape of an element as a list, and the definition handles each item of a list as a Bool.

Then we see functions like the following:

- elem, which checks in an element belong to a list.
- (==), which checks if 2 elements are equal.
- drop, which takes a list and discards a specifed about of items in the list from the beginning.

These functions seem to note care about all of the properties (shape and behaviour together) of their inputs.

- The elem function wants its inputs to be list does not care about the internal type of list items as long as some notion of equality if defined.
- The (==) works on all types where some notion of equality is defined, this is the only behaviour it is interested in. (A counter example would be the type of functions: Integer → Integer, and we will discuss why this is the case soon.)
- The drop function just cares about the list structre of an element, and does not look at the behaviour of the list items at all.

To define any function in haskell, one needs to give them a type, haskell demands so, so lets look at the case of the drop function. One possible way to have it would be to define one for every single type, as shown below:

```
dropIntegers :: Integer → [Integer] → [Integer]
dropIntegers = ...
dropChars :: Integer → [Char] → [Char]
dropChars = ...
dropBools :: Integer → [Bool] → [Bool]
dropBools = ...
.
```

but that has 2 problems:

- The first is that the defintion of all of these functions is the exact same, so doing this would be a lot of manual work, and one would also need to have different name for different types, which is very inconvenient.
- The second, and arguably a more serious issue, is that it stops us from abstracting, abstraction is the process of looking at a scenario and removing information that is not relevant to the problem.
 - An example would be that the drop simply lets us treat elements as lists, while we can ignore the type of items in the list.
 - All of Mathematics and Computer Science is done like this, in some sense it is just that.
 - Linear Algebra lets us treat any set where addition and scaling is defined as one *kind* of thing, without worrying about any other structure on the elements.
 - Metric Spaces let us talk about all sets where there is a notion of distance.
 - Differential Equations let us talk about "change" in many different scenarios.

in all of these fields of study, say linear algebra, a theorem generally involes working with an object, whose exact details we don't assume, just that it satisfies the conditions required for it to be a vector space and seeing what can be done with just that much information.

• And this is a powerful tool because solving a problem in the *abstract* version solves the problem in all *concretized* scenarios.

📵 John Locke, An Essay Concerning Human Understanding (1690)

The acts of the mind, wherein it exerts its power over simple ideas, are chiefly these three:

- 1. Combining several simple ideas into one compound one, and thus all complex ideas are made.
- 2. The second is bringing two ideas, whether simple or complex, together, and setting them by one another so as to take a view of them at once, without uniting them into one, by which it gets all its ideas of relations.
- 3. The third is separating them from all other ideas that accompany them in their real existence: this is called abstraction, and thus all its general ideas are made.

One of the ways abstraction is handled in Haskell, and a lot of other programming languages is Polymorphism.

⇒ Polymorphism

A polymorphic function is one whose output type depends on the input type. Such a property of a function is called polymorphism, and the word itself is ancient greek for *many forms*.

A polymorphic function differs from functions we have seen in the following ways:

- It can take input from multiple different input types (not necessarily all types, restrictions are allowed).
- Its output type can be different for different inputs types.

An example for such a function that we have seen in the previous section would be:

```
drop
drop :: Integer → [a] → [a]
drop _ [] = []
drop 0 ls = ls
drop n (x:xs) = drop (n-1) xs
```

The polymorphism of this function is shown in the type $drop :: Integer \rightarrow [a] \rightarrow [a]$ where we have used the variable a (usually called a type variable) instead of explicitly mentioning a type.

The goal of polymorphic functions is to let us abstract over a collection of types. That take a collection of types, based on some common property (either shape, or behaviour, maybe both) and treat that as a collection of elements. This lets us build functions that work on "all lists" or "all maybe types" and so on.

The example \(\lambda \) drop brings together all types of lists and only looks at the *shape* of the element, that of a list, and does not look at the bhevaiour at all. This is shown by using the type variable \(\mathbf{a} \) in the definition, indicating that we don't care about the properties of the list items.

X Datatypes of some list functions

```
A nice exercise would be to write the types of the following functions defined in the previous section: head, tail, (!!), take and splitAt.
```

We have now given a type to one of the 3 functions discussed above, by giving a way to group together types by their common *shape*. This is not enough to give types of the other two functions ((==) and elem), to do so we define the following:


```
Given a type \top, the behaviour of the elements in \top is the set of definable functions whose type includes \top.
```

We use this to define the two types of polymorphism, one of which we have already seen in this section, and we will look at the other one more deepy in the next.

• 2 Types of Polymorphism

- Polymorphism done by grouping types that with common *shape* is called Parametric Polymorphism.
- Polymorphism done by grouping types that with common *behaviour* is called Ad-Hoc Polymorphism.

We will come back to parametric polymorphism in the second half of the chapter, but for now we discuss Ad-Hoc polymorphism.

§ 6.1.2. A Taste of Type Classes

Consider the case of the Integer functions

```
f :: Integer \rightarrow Integer
f x = x^2 + 2*x + 1
g :: Integer \rightarrow Integer
g x = (x + 1)^2
```

We know that both functions, do the same thing in the mathematical sense, given any input, both of then have the same output, so mathematicans call them the same, and write f=g this is called function extensionality. But the does the following expression make sense in haskell?

```
% Function Extensionality
f == g
```

This definitely seems like a fair thing to ask, as we already have a definition for equality of mathematical functions, but we run into 2 issues:

- Is it really fair to say that? In computer science, we care about the way things are computed, that is where the subject gets its name from. A lot of times, one will be able to distinguish distinguish between functions, by simply looking at which one works faster or slower on big inputs, and that might be something people would want to factor into what they mean by "sameness". So maybe the assumption that 2 functions being equal pointwise imply the functions are equal is not wise.
- The second is that in general it is not possible, in this case we have a mathematical identity that lets us prove so, but given any 2 function, it might be that the only way to prove that they are equal would be to actually check on every single value, and since domains of functions can be infinite, this would simply not be possible to compute.

So we can't have the type of (==) to be $a \rightarrow a \rightarrow Bool$. In fact, if I try to write it, the haskell compiler will complain to me by saying

To tackle the problem of giving a type for (==), we define the following:

```
    Typeclasses

Typeclasses are a collection of types, characterized by the common behaviour.
```

The previous section talked about grouping types together by the common *shape* of the elements but Function Extensionality tells us that there are other properties shared by elements of different types, which we call their *behaviour*. By that we mean the functions that are defined for them.

Typeclasses are how one expresses in haskell, what a collection of types looks like, and the way to do so is by defining the common functions that work for all of them. Some examples are:

- Eq, which is the collection of all types for which the function (==) is defined.
- Ord, which is the collection of all types for which the function (<) is defined.
- Show, which is the collection of all types for which there is a function that converts them to String using the function show.

Note that in the above cases, defining one function lets you define some other functions, like $(\not=)$ for Eq and (\leqslant) , (\geqslant) and others for the Ord typeclass.

Now we come back to the elem function, the goal of this function is to check if a given element belongs to a list. And the following is a way to write it:

Now lets try to give this a type.

First we see that the e must have the same types as the items in the list, but if we try to give it the type

```
elem :: a \rightarrow [a] \rightarrow Bool
```

we will encounter the same issue as we did in \(\bar{\lambda}\) Function Extensionality, because of (==). We need to find a way to say that a belongs to the collection Eq , and this leads to the correct type:

```
elem :: Eq a \Rightarrow a \rightarrow [a] \rightarrow Bool
elem _ [] = False
elem e (x : xs) = e == x || elem e xs
```

X Checking if a list is sorted

Write the function isSorted which takes in a list as an argument, such that the elements of the list have a notion of ordering between them, and the output should be true if the list in an ascending order (equal elements are allowed to be next to each other), and false otherwise.

X Shape is behaviour?

The two types of polymorphism, that is parametric and ad-hoc, are not exlusive, there are plenty of function where both are seen together, an example would be elem.

These two happen to not be that different conceptually either, we give elements their *shape* using functions, try figuring out what the functions are for list types, maybe type, tuples and either type.

That being said, the syntax used to define parametric polymorphism sets us to set operations while defining the type of the function which is very powerful.

§6.2. Higher Order Functions

One of the most powerful features of functional programming languages is that it lets one pass in functions as argument to another function, and have functions return other functions as outputs, these kinds of functions are known as:

A higher order function is a function that does at least one of the following things:

- It takes one or more functions as its arguments.
- It returns a function as an argument.

This is again a way of generalization and is very handy, as we will see in the rest of the chapter.

§6.2.1. Currying

Perhaps the first place where we have encountered higher order functions is when we defined (+) :: Int \rightarrow Int \rightarrow Int way back in §3.4.. We have been suggesting to think of the type as (+) :: (Int, Int) \rightarrow Int, because that is really what we want the function to do, but in haskell

it would actually mean (+) :: Int \rightarrow (Int \rightarrow Int), which says the function has 1 interger argument, and it returns a function of type Int \rightarrow Int.

An example from mathematics would be finding the derivative of a differentiable function f at a point x. This is generally represented as f'(x) and the process of computing the derivative can be given to have the type

$$(f,x) \mapsto f'(x) : ((\mathbb{R} \to \mathbb{R})^d \times \mathbb{R}) \to \mathbb{R}$$

Here $(\mathbb{R} \to \mathbb{R})^d$ is the type of real differentiable functions.

But one can also think of the derivative operator, that takes a differentiable function f and produces the function f', which can be given the following type:

$$\frac{d}{dx}: (\mathbb{R} \to \mathbb{R})^d \to (\mathbb{R} \to \mathbb{R})$$

In general, we have the following theorem:

Theorem Currying: Given any sets A, B, C, there is a bijection called curry between the sets $C^{A \times B}$ and the set $(C^B)^A$ such that given any function $f: C^{A \times B}$ we have

$$(\text{curry } f)(a)(b) = f(a, b)$$

Category theorists call the above condition *naturality* (or say that the bijection is *natural*). The notation Y^X is the set of functions from X to Y.

Proof We prove the above by defining curry : $C^{A \times B} \to (C^B)^A$, and then defining its inverse.

$$\mathrm{curry}(f)\coloneqq x\mapsto (y\mapsto f(x,y))$$

The inverse of curry is called uncurry : $(C^B)^A \to C^{A \times B}$

$$\operatorname{uncurry}(g) := (x, y) \mapsto g(x)(y)$$

To complete the proof we need to show that the above functions are inverses.



Show that the uncurry is the inverse of curry, and that the *naturality* condition holds.

(Note that one needs to show that uncurry is the 2-way inverse of curry, that is, uncurry \circ curry = id and curry \circ uncurry = id, one direction is not enough.)

The above theorem, is a concretization of the very intuitive idea:

- Given a function f that takes in a pair of type $(A, B) \to C$, if one fixes the first argument, then we get a function f(A, -) which would take an element of type B and then give an element of types C.
- But every different value of type *A* that we fix, we get a different function.
- Thus we can think of f as a function that takes in an element of type A and returns a function of type $B \to C$.

And the above theorem is also "implemented" in haskell using the following functions:

```
A curry and uncurry

curry :: ((a, b) \rightarrow c) \rightarrow a \rightarrow b \rightarrow c

curry f a b = f (a, b)

uncurry :: (a \rightarrow b \rightarrow c) \rightarrow (a, b) \rightarrow c

uncurry g (a, b) = g a b
```

Currying lets us take a function with with argument, and lets us apply the function to each of them one at a time, rather than applying it on the entire tuple at once. One very interesting result of that is called partial application.

Partial application is precisely the process of fixing some arugments to get a function over the remaining, let us look at some examples

```
suc :: Integer → Integer
suc = (+ 1) -- suc 5 = 6

-- | curry examples
neg :: Integer → Integer
neg = (-1 *) -- neg 5 = -5
```

We will find many more examples in the next section.

§ 6.2.2. Functions on Functions

We have already seen examples of a couple of functions whose arguments themselves are functions. The most recent ones being a curry and uncurry, both of them take functions as inputs and return functions as outputs (note that our definition takes in functions and values, but we can always use partial application), these functions can be thought of as useful operations on functions.

Another very useful example, that a lot of us have seen is composition of functions, when we allow functions as inputs, composition can be treated like a function:

```
* composition
(.) :: (b → c) → (a → b) → (a → c)
g . f = \a → g (f a)

-- example
square :: Integer → Integer
square x = x * x

-- checks if a number is the same if written in reverse
is_palindrome :: Integer → Bool
is_palindrome x = (s == reverse s)
where
    s = show x -- convert x to string

is_square_palindrome :: Integer → Bool
is_square_palindrome = is_palindrome . square
```

Breaking a complicated function into simpler parts, and being able to combime them is fairly standard problem solving strategy, in both Mathematics and Computer Science, and in fact in a lot more general scenarios too! Having a clean notation for a tool that used fairly frequently is always a good idea!

Higher order functions are where polymorphism shines it brightest, see how the composition function works on all pairs of functions that can be composed in the mathematical sense, this

would have been significantly less impressive if say it was only composition between functions from Integer \rightarrow Integer and Integer \rightarrow Bool.

Another similar function that makes writing code in haskell much cleaner is the following:

```
* function application function

($) :: (a \rightarrow b) \rightarrow a \rightarrow b

f $ a = f a

($\&\cdots :: a \rightarrow (a \rightarrow b) \rightarrow b

a $\&\cdot f = f a
```

These may seem like a fairly trivial function that really doesn't offer anything apart from an extra \$\\$, but the following 3 lines make them useful

```
operator precedence
-- The 'r' in infixr says a.b.c.d is interpreted by haskell as a.(b.(c.d))
infixr 9 .
infixr 0 $
infixl 1 &
```

These 2 lines are saying that, whenever there is an expression, which contains both (\$) and (.), haskell will first evaluate (.), using these 2 one can write a chain of function applications as follows:

```
-- old way
f (g (h (i x)))
-- new way
f . g . h . i $ x
-- also
x & f & g & h & i
```

which in my opinion is much simpler to read!

x Exercise

```
Write a function apply_n_times that takes a function f and an argument a along with a natural number n and applies the function n times on a, for example: apply_n_times (+1) 5 3 would return 8. Also figure out the type of the function.
```

§ 6.2.3. A Short Note on Type Inference

Haskell is a statically typed language. What that means is that it requires the types for the data that is being processed by the program, and it needs to do so for an analysis that happens before running called type checking.

It is not however required to give types to all functions (we do strongly recommend it though!), in fact one can simply not give any types at all. This is possible because the haskell compiler is smart enough to figure all of it out on its own! It's so good that when you do write type annotations for functions, haskell ignores it, figures the types out on its own and can then check if you have given the types correctly. This is called type inference.

Haskell's type inference also gives the most general possible type for a function. To see that, one can open GHCi, and use the :t command to ask haskell for types of any given expression.

```
>>> :t flip

flip :: (a \rightarrow b \rightarrow c) \rightarrow b \rightarrow a \rightarrow c

>>> :t (\ x \ y \rightarrow x == y)

(\ x \ y \rightarrow x == y) :: Eq a \Rightarrow a \rightarrow a \rightarrow Bool
```

The reader should now be equipped with everything they need to understand how types can be read and can now use type inference like this to understand haskell programs better.

§ 6.2.4. Higher Order Functions on Maybe Type: A Case Study

The Maybe Type, as defined in Chapter 3 is another playground for higher order functions.

As a refresher on Maybe Types, given a type a, one can add an *extra element* to it by making it the type Maybe a. For example, given the type Integer, whose elements are all the integers, the type Maybe Integer will be the collection of integers along with an extra element, which we call Nothing.

Maybe Types are meant to capture failure, for example, the \(\lambda\) function to a maybe type defines the reciprocal function, which takes a rational number, and returns its reciprocal, except when the input is \(\text{0}\), in which case it returns the extra value which is Nothing.

To state that elements belong to a Maybe Type they are decorated with Just . For example:

- The type of 5 is Integer
- The type of Just 5 is Maybe Integer.

To see an example of some functions that use Maybe in their type definitions are:

• A safe version of head and tail:

```
SafeHead :: [a] → Maybe aSafeTail :: [a] → Maybe [a]
```

• A safe way to index a list, that is a safe version of (!!):

```
▶ safeIndex :: [a] \rightarrow Int \rightarrow Maybe a
```

```
X Safety First
```

```
Define the functions safeHead, safeTail and safeIndex.
```

Something that should be noted is that so far in the book, head, tail and (!!) are the only functions for which we need safe versions. This is because these are the only functions that are not defined for all possible inputs and can hence give an error while the program executes (that would be like passing empty list to head, or idexing an element at a negative position). Every other function we have seen will always have a valid output, that is, it is literally impossible for functions to fail for not having a valid input if one only uses safe functions!

This may seem like a fairly trivial fact for those who are learning haskell as thier first programming language, but for those who has programmed in languages like Java, Python, C or so on, it is impossible to write a program that would lead to an error which is equivalent to the following:

- Nonetype does not have this attribute: Python
- Null Pointer Exception: Java
- Memory Access Violation or Segfault for derefencing a null pointer: C

If these erros have haunted you, you have our condolences, all of these would have been completely avoided if the langauge had some version of Maybe, or even some bare bones type system in case of python.

All of the safety provided by Maybe types has 1 potential drawback: When using Maybe types, one eventually runs into a problem that looks something like this:

- While solving a complicated problem, one would break it down into simpler parts, that would correspond to many tiny functions, that will come to gether to form the functions which solves the problem.
- Turns out that one the functions, maybe something in the very beginning returns a Maybe Integer instead of an Integer.
- This means that the next function along the chain, would have had to have its input type as Maybe Integer to account for the potentially case of Nothing.
- This also forces the output type to be a Maybe type, this makes sense, if the process fails in the beginning, one might not want to continue.
- The Maybe now propogates in this manner through a large section of your code, this means that a huge chunk of code needs to be rewritten to looks something like:

```
f:: a → b
f inp = <some expression to produce output>

f' :: Maybe a → Maybe b
f' (Just inp) = Just $ <some epression to produce output>
f' Nothing = Nothing
```

Note that \$\\$ here is making our code a little bit cleaner, otherwise we would have to put the enter expression in paranthesis.

This is still not a very elegant way to write things though, and its just a lot of repetitive work (all of it is just book keeping really, one isn't really adding much to the program by making these changes, except for safety, programmers usually like to call it boilerplate.)

Instead of going and modifying each function manually, we make a function modifier, which is precisely what a higher order function: Our goal, which is obvious from the problem:

```
(a \rightarrow b) \rightarrow (Maybe \ a \rightarrow Maybe \ b) and we define it as follows:
```

```
maybeMap
maybeMap :: (a \rightarrow b) \rightarrow Maybe \ a \rightarrow Maybe \ b
maybeMap f (Just a) = Just . f $ a
maybeMap _ Nothing = Nothing

(\Leftrightarrow) :: (a \rightarrow b) \rightarrow Maybe \ a \rightarrow Maybe \ b \rightarrow Symbol version
f \Leftrightarrow a = maybeMap f a

(<.>) :: (b \rightarrow c) \rightarrow (a \rightarrow Maybe \ b) \rightarrow a \rightarrow Maybe \ c
g <.> f = \backslash x \rightarrow g \Leftrightarrow f \ x

infixr 1 \Leftrightarrow
infixr 8 <.>
```

Note: The symbol <> is written as <\$>.

So consider the following chain of functions:

```
f . g . h . i . j $ x
```

where say i was the function that turned out to be the one with Maybe output, the only change we need to the code would be the following!

```
f . g . h <.> i . j $ x
```

Higher order functions, along with polymorphism help our code be really expressive, so we can write very small amounds of code that looks easy to read, which also does a lot. In the next chapter we will see a lot more examples of such functions.

X Beyond map

The above shows how haskell can elegantly handle cases when we want to convert a function from type $a \rightarrow b$ to a function from type Maybe $a \rightarrow Maybe b$. This can be thought of as some sort of a *change in context*, where our function is now aware that its inputs can contain a possible fail value, which is Nothing. The reason for needing such a *change in context* were function of type $f :: a \rightarrow Maybe b$, that is ones which can fail. They add the possiblility of failure to the *context*.

But since we have the power to be able to change *contexts* whenever wanted easily, we have a responsibility to keep it consistent when it makes sense. That is, what if there are multiple function with type $f:: a \rightarrow Maybe b$ we then would just want to use <.> or maybeMap to get something like:

```
f :: a \rightarrow Maybe b
g :: b \rightarrow Maybe c

h x = g \Leftrightarrow f x :: a \rightarrow Maybe (Maybe c)
```

This is most likely undesirable, the point of Maybe was to say that there is a possiblility of error, the point of (>>) was to propogate that possible error then the type Maybe (Maybe c) seems to not have a place here.

To rectify this, we find a way to compose such functions together:

```
\begin{array}{l} \text{maybe\_comp} \ :: \ (a \ \rightarrow \ \text{Maybe} \ b) \ \rightarrow \ (b \ \rightarrow \ \text{Maybe} \ c) \ \rightarrow \ (a \ \rightarrow \ \text{Maybe} \ c) \\ \text{infixr} \ 8 \ \Longrightarrow \end{array}
```

This cute looking function is called the fish operator. This will be our way to compose functions of the shape $a \rightarrow Maybe \ b$ together, but note that the order of inputs is reversed, so it not looks like a pipe through which the value is passed. The above function h is defined as follows:

```
h = f \Longrightarrow g :: a \rightarrow Maybe c
```

This function, takes a value of type a, first applies f to it, and then applies g to it in a way that the final output is of type Maybe c, and of course, we can use this to make longer chains!

Define and (\Longrightarrow) and see how both of then are used in programs, and compare then by how one would define final without these.

Note The symbol (\Longrightarrow) is written as $(\gt=\gt)$.

§6.3. Exercise

X Guard Idiom

- (i) Sometimes we have a boolean check that decides whether the return value is a failure or success. Write a function ensure :: Bool \rightarrow a \rightarrow Maybe a which returns Nothing if the boolean is False and Just inp when the boolean is True and inp is the other input.
- (ii) Write a function guard $:: Bool \rightarrow Maybe$ () which gives Nothing when the boolean is False and Just () when it is True
- (iii) Write an operator (\diamondsuit) :: Maybe a \to b \to Maybe b which is a no-op on Nothing values, but replaces whatever is inside a Just value on the left with the value on the right.
- (iv) Can you now write ensure using only guard and >? This is called the Guard-Sequence idiom and is extremely common in production level Haskell code.
- (v) While we don't use it here, could you define (*) :: Maybe a \rightarrow Maybe b \rightarrow Maybe b which returns Nothing and returns the second argument if the first argument is Nothing or a Just value respectively. This is also used in tandem with guard.

X Some List Functions

- (i) Define filter :: $(a \rightarrow Bool) \rightarrow [a] \rightarrow [a]$ which given a predicate and list of elements, returns the list of elements satisfying the predicate.
- (ii) Define map :: $(a \rightarrow b) \rightarrow [a] \rightarrow [b]$ which given a function and a list of elements, applies the function to each element and returns the new list.
- (iii) Define concatMap :: $(a \rightarrow [b]) \rightarrow [a] \rightarrow [b]$ which maps a function over all the elements of a list and concatenate the resulting lists. Do not use map in your definition.
- (iv) Define groupBy :: $(a \rightarrow a \rightarrow Bool) \rightarrow [a] \rightarrow [[a]]$ which groups adjacent elements according to some relation. In last chapter, we have seen group which is nothing but groupBy (==). We could also have groupBy (\leq) to get the consecutive increasing subsequences.

The said *> are part of the Data.Functors module and guard is part of the Control.Monad module. Their actual type signatures work for any functor, not just Maybe. We will see what functors are in later chapters.

X Conditional Apply

- (i) Write a function applyWhen :: Bool \rightarrow (a \rightarrow a) \rightarrow a which applies a function to a value if a condition is true, otherwise, it returns the value unchanged.
- (ii) Define on :: $(b \to b \to c) \to (a \to b) \to a \to a \to c$ such that on b u x y runs the binary function b on the results of applying unary function u to two arguments x and y. This is again quite common in production level code as it avoids rewriting the same function over and over.
- (iii) Prove that

```
applyWhen True = id
applyWhen False f = id
```

(iv) Prove that

```
(*) `on` id = (*)
((*) `on` f) `on` g = (*) `on` (f . g)
flip `on` f . flip `on` g = flip `on` (g . f)
```

X Theorems for Free

We will talk about some of the theorems in Wadler's iconic paper "Theorems for Free". From the type of a polymorphic function, we can derive a theorem which all such functions will follow.

```
(i) Given f :: a1 \rightarrow b1 and g :: a2 \rightarrow b2, prove that const (f a1) (g a2) = f (const a1 a2)
```

```
(ii) Given r :: [a] \rightarrow [a] and f :: b \rightarrow c, prove that map f \cdot r = r \cdot map f
```


- (iii) Define $prodMap :: (a \rightarrow a1) \rightarrow (b \rightarrow b1) \rightarrow (a,b) \rightarrow (a1, b1)$ and $coProdMap :: (a \rightarrow a1) \rightarrow (b \rightarrow b1) \rightarrow Either a b \rightarrow Either a1 b1 which apply two given functions to the elements of a tuple or an Either.$
- (iv) Given $r :: (a,b) \rightarrow (a,b)$ and $f :: a \rightarrow a1$, $g :: b \rightarrow b1$, prove that r . prodMap f g = prodMap f g . r
- (v) Given $r :: Either a b \rightarrow Either a b and <math>f :: a \rightarrow a1, g :: b \rightarrow b1$, prove that r : coProdMap f g = coProdMap f g . r


Can you guess the general scheme for the theorem we can get for free? Could you prove your hypothesis?

X Product and Co-Products

- (i) Define the function product $:: (a \to b) \to (a \to c) \to a \to (b, c)$ which takes two functions $f: x \mapsto fx$ and $g: x \mapsto gx$ and returns a function $f \times g: x \mapsto (fx, gx)$.
- (ii) Define a function coProduct :: $(b \to a) \to (c \to a) \to \text{Either } b \ c \to a$ which takes two functions f', g' from different domains but same co-domain and combines them.

 One can make a commutative diagram for these functions as follows:

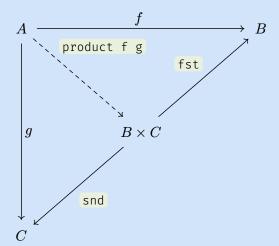

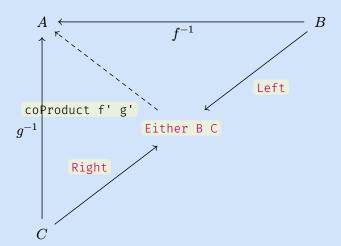

Considering the 'co' prefix is used to define a talk about the dual of a function, could you guess what a dual means? A hint could be the fact that Either can be called a co-tuple as well as f^{-1} can be called co-f.

X Composing Compose

- (i) Infer the type of (.).(.) manually. Can you see the use case? This is often defined in production level Haskell as .:=(.).(.) and is called the Blackbird Combinator (It also has another name but as it is much more explicit, we leave it upto your curiosity).
- (ii) Can you guess the type of (.).(.)? Now by induction, what is the type of a similar expression with n many (.)?

Advanced List Operations

§7.1. List Comprehensions

As we have talked about before, Haskell tries to make it's syntax look as similar as possible to math notation. This is represented in one of the most powerful syntactic sugars in Haskell, list comprehension.

If we want to talk about all pythagorean triplets using integers from 1-n, we could express it mathematically as

$$\left\{(x,y,z) \mid x,y,z \in \{1,2,...,n\}, x^2 + y^2 = z^2\right\}$$

which can be written in Haskell as

```
[(x,y,z) \mid x \leftarrow [1..n], y \leftarrow [1..n], z \leftarrow [1..n], x^2 + y^2 == z^2]
```

This allows us to define a lot of operations we have seen before, in ch 1, in rather concise manner.

For example, $map :: (a \rightarrow b) \rightarrow [a] \rightarrow [b]$ which used to apply a function to a list of elements of a suitable input type and gave a list of the suitable output type. Basically, map f [a1,a2,a3] = [f a1, f a2, f a3]. We can define this in two ways:

```
Defining map using pattern matching and list comprehension

map _ [] = []
map f (x:xs) = (f x) : (map f xs)

-- and much more clearly and concisely as
map f xs = [f x | x ← xs]
```

Similarly, we had seen filter :: $(a \rightarrow Bool) \rightarrow [a] \rightarrow [a]$ which used to take a boolean function, some predicate to satisfy, and return the list of elements satisfying this predicate. We can define this as:

```
Defining filter using pattern matching and list comprehension
filter _ [] = []
filter p (x:xs) = let rest = p xs in
   if p x then x : rest else rest

-- and much more cleanly as
filter p xs = [x | x ← xs, p x]
```

Another operation we can consider, though not explicitly defined in Haskell, is cartesian product. Hopefully, you can see where we are going with this right?

```
Defining cartesian product using pattern matching and list comprehension

cart :: [a] → [b] → [(a,b)]

cart xs ys = [(x,y) | x ← xs, y ← ys]

-- Trying to define this recursively is much more cumbersome.

cart [] _ = []

cart (x:xs) ys = (go x ys) ++ (cart xs ys) where

go _ [] = []

go l (m:ms) = (l,m) : (go l ms)
```

Finally, let's talk a bit more about our pythagorean triplets example at the start of this section.

For n = 1000, we get the answer is some 13 minutes, which makes sense as our code is basically considering the 1000^3 triplets and then culling the ones which are not pythagorean. But could we do better?

A simple idea would be to not check for z as it is implied by the choice of x and y and instead set the condition as

```
A mid way to get pythagorean triplets

pythMid n = [(x, y, z) |
    x ← [1..n],
    y ← [1..n],
    let z2 = x^2 + y^2,
    let z = floor (sqrt (fromIntegral z2)),
    z * z == z2,
    z ≤ 1000]
```

This is clearly better as we will be only considering some 1000^2 triplets. Continuing with our example, for n = 1000, we finish in 1.32 seconds. As we expected, that is already much, much better than the previous case.

Also notice that we can define variables inside the comprehension by using the let syntax.

However, there is one final optimization we can do. The idea is that x>y or x< y for pythagorean triplets as Sqrt 2 is irrational. So if we can somehow, only evaluate only the cases where x< y and then just generate (x,y,z) and (y,x,z); we almost half the number of cases we check. This means, our final optimized code would look like:

```
The optimal way to get pythagorean triplets

pythOpt n = [t|
    x ← [1..n],
    y ← [(x+1)..n],
    let z2 = x^2 + y^2,
    let z = floor (sqrt (fromIntegral z2)),
    z * z == z2,
    z ≤ 1000,
    t ← [(x,y,z), (y,x,z)]
    ]
```

This should only make some $\frac{1000*999}{2}$ triplets and cull the list from there. This makes it about twice as fast, which we can see as for n=1000, we finish in 0.68 seconds.

```
Notice, we can't return two things in a list comprehension. That is, pythOpt n = [(x,y,z), (y,x,z) | \text{oblah blah}] will given an error. Instead, we have to use pythOpt n = [t | \text{oblah blah}, t \leftarrow [(x,y,z), (y,x,z)]].
```

Another interesting thing we can do using list comprehension is sorting. While further sorting methods and their speed is discussed in chapter 10, we will focus on a two methods of sorting: Merge Sort and Quick Sort.

We have seen the idea of divide and conquer before. If we can divide the problem in smaller parts and combine them, without wasting too much time in the splitting or combining, we can solve the problem. Both these methods work on this idea.

Merge Sort divides the list in two parts, sorts them and then merges these sorted lists by comparing element to element. We can do this recursion with peace of mind as once we reach 1 element lists, we just say they are sorted. That is mergeSort[x] = [x].

Just to illustrate, the merging would work as follows: merge [1,2,6] [3,4,5] would take the smaller of the two heads till both lists are empty. This works as as both the lists are sorted. The complete evaluation is something like:

```
merge [1,2,6] [3,4,5]
= 1 : merge [2,6] [3,4,5]
= 1 : 2 : merge [6] [3,4,5]
= 1 : 2 : 3 : merge [6] [4,5]
= 1 : 2 : 3 : 4 : merge [6] [5]
= 1 : 2 : 3 : 4 : 5 : merge [6] []
= 1 : 2 : 3 : 4 : 5 : 6 : merge [] []
= 1 : 2 : 3 : 4 : 5 : 6 : []
= [1,2,3,4,5,6]
```

So we can implement merge, rather simply as

```
The merge function of mergesort

merge :: Ord a ⇒ [a] → [a] → [a]

merge [] [] = []

merge [] ys = ys

merge xs [] = xs

merge (x:xs) (y:ys) = if x < y

then x : merge xs (y:ys)

else y : merge (x:xs) ys

</pre>
```

Note, we can only sort a list which has some definition of order on the elements. That is the elements must be of the typeclass Ord.

To implement merge sort, we now only need a way to split the list in half. This is rather easy, we have already seen drop and take. An inbuilt function in Haskell is SplitAt :: Int \rightarrow [a] \rightarrow ([a], [a]) which is basically equivalent to SplitAt n xs = (take n xs, drop n xs).

That means, we can now merge sort using the function

```
An implementation of mergesort

mergeSort :: Ord a ⇒ [a] → [a]

mergeSort [] = []

mergeSort [x] = [x]

mergeSort xs = merge (mergeSort left) (mergeSort right) where

  (left,right) = splitAt (length xs `div` 2) xs
```

X MergeSort Works?

Prove that merge sort indeed works. A road map is given

- (i) Prove that merge defined by taking the smaller of the heads of the lists recursively, produces a sorted list given the two input lists were sorted. The idea is that the first element chosen has to be the smallest. Use induction of the sum of lengths of the lists.
- (ii) Prove that mergeSort works using induction on the size of list to be sorted.

This is also a very efficient way to sort a list. If we define a function C that count the number of comparisons we make, $C(n) < 2 * C(\lceil \frac{n}{2} \rceil) + n$ where the n comes from the merge.

This implies

$$\begin{split} C(n) &< n \lceil \log(n) \rceil C(1) + n + \left\lceil \frac{n}{2} \right\rceil + \left\lceil \frac{\lceil \frac{n}{2} \rceil}{2} \right\rceil + \ldots + 1 \\ &< n \lceil \log(n) \rceil + n + \frac{n+1}{2} + \left\lceil \frac{n+1}{4} \right\rceil + \ldots + 1 \\ &= n \lceil \log(n) \rceil + n + \frac{n}{2} + \frac{1}{2} + \frac{n}{4} + \frac{1}{2} + \ldots + 1 \\ &< n \lceil \log(n) \rceil + 2n + \frac{1}{2} \lceil \log(n) \rceil \\ &< n (\log(n) + 1) + 2n + \frac{1}{2} (\log(n) + 1) \\ &= n \log(n) + 3n + \frac{1}{2} \log(n) + \frac{1}{2} \end{split}$$

Two things to note are that the above computation was a bit cumbersome. We will later see a way to make it a bit less cumbersome, albeit at the cost of some information.

The second, for sufficiently large n, $n \log(n)$ dominates the equation. That is

$$\exists m \ s.t. \ \forall n > m : n \log(n) > 3n > \frac{1}{2} \log(n) > \frac{1}{2}$$

This means that as n becomes large, we can sort of ignore the other terms. We will later prove, that given no more information other than the fact that the shape of the elements in the list is such that they can be compared, we can't do much better. The dominating term, in the number of comparisons, will be $n \log(n)$ times some constant. This later refers to chapter 10.

In practice, we waste some amount of operations dividing the list in 2. What if we take our chances and approximately divide the list into two parts?

This is the idea of quick sort. If we take a random element in the list, we expect half the elements to be lesser than it and half to be greater. We can use this fact to define quickSort by splitting the list on the basis of the first element and keep going. This can be implemented as:

```
An implementation of Quick Sort

quickSort :: Ord a ⇒ [a] → [a]

quickSort [] = []

quickSort [x] = [x]

quickSort (x:xs) = quickSort [l | l ← xs, l > x] ++ [x] ++ quickSort [r | r

← xs, r ≤ x]
```

X Quick Sort works?

Prove that Quick Sort does indeed works. The simplest way to do this is by induction on length.

Clearly, With n being the length of list, C(n) is a random variable dependent on the permutation of the list.

Let l be the number of elements less than the first elements and r = n - l - 1. This means C(n) = C(l) + C(r) + 2(n-1) where the n-1 comes from the list comprehension.

In the worst case scenario, our algorithm could keep splitting the list into a length 0 and a length n-1 list. This would screw us very badly.

As C(n)=C(0)+C(n-1)+2(n-1) where the n-1 comes from the list comprehension and the (n-1)+1 from the contamination. Using C(0)=0 as we don't make any comparisons, This evaluates to

$$\begin{split} C(n) &= C(n-1) + 2(n-1) \\ &= 2(n-1) + 2(n-2) + \ldots + 2 \\ &= 2 * \frac{n(n-1)}{2} \\ &= n^2 - n \end{split}$$

Which is quite bad as it grows quadratically. Furthermore, the above case is also common enough. How common?

```
X A Strange Proof

Prove 2^{n-1} \le n!
```

Then why are we interested in Quick Sort? and why is named quick?

Let's look at the average or expected number of comparison we would need to make!

Consider the list we are sorting a permutation of $[x_1, x_2, ..., x_n]$. Let $X_{i,j}$ be a random variable which is 1 if the x_i and x_j are compared and 0 otherwise. Let $p_{i,j}$ be the probability that x_i and x_j are compared. Then, $\mathbb{E}(X_{i,j}) = 1 * p + 0 * (1-p) = p$.

Using the linearity of expectation (remember $\mathbb{E}(\sum X) = \sum \mathbb{E}(x)$?), we can say $\mathbb{E}(C(n)) = \sum_{i,j} \mathbb{E}(X_{i,j}) = \sum_{i,j} p_{i,j}$.

Using the same idea we used to reduce the number of pythagorean triplets we need to check, we rewrite this summation as

$$\mathbb{E}(C(n)) = \sum_{i,j} p_{i,j}$$
$$= \sum_{i=1}^{n} \sum_{j=i+1}^{n} p_{i,j}$$

Despite a toothy appearance, this is rather easy and elegant way to actually compute $p_{i,j}$.

Notice that each element in the array (except the pivot) is compared only to the pivot at each level of the recurrence. To compute $p_{i,j}$, we shift our focus to the elements $\left[x_i, x_{i+1}, ..., x_j\right]$. If this is split into two parts, x_i and x_j can no longer be compared. Hence, x_i and x_j are compared only when from the first pivot from the range $\left[x_i, x_{i+1}, ..., x_j\right]$ is either x_i or x_j .

This clearly has probability $p_{i,j} = \frac{1}{j-i+1} + \frac{1}{j-i+1} = \frac{2}{j-i+1}$. Thus,

$$\begin{split} \mathbb{E}(C(n)) &= \sum_{i=1}^n \sum_{j=i+1}^n \frac{2}{j-i+1} \\ &= \sum_{i=1}^n 2 \bigg(\frac{1}{2} + \ldots + \frac{1}{n-i+1} \bigg) \\ &= 2 \sum_{i=1}^n \bigg(1 + \frac{1}{2} + \ldots + \frac{1}{n-i+1} - 1 \bigg) \\ &\leq 2 \sum_{i=1}^n \log(i) \\ &\leq 2 \sum_{i=1}^n \log(n) \\ &\leq 2n \log(n) \end{split}$$

Considering the number of cases where the comparisons with n^2-n operations is 2^{n-1} , Quick Sort's expected number of operations is still less than $2n\log(n)$ which, as we discussed, is optimal.

This implies that there are some lists where Quick Sort is extremely efficient and as one might expect there are many such lists. This is why languages which can keep states (C++, C, Rust etc) etc use something called Intro Sort which uses Quick Sort till the depth of recursion reaches $\log(n)$ (at which point it is safe to say we are in one of the not nice cases); then we fallback to Merge Sort or a Heap/Tree Sort(which we will see in chapter 11).

Haskell has an inbuilt sort function you can use by putting import Data. List at the top of your code. This used to use quickSort as the default but in 2002, Ian Lynagh changed it to Merge Sort. This was motivated by the fact that Merge Sort guarantees sorting in $n \log(n) + \dots$ comparisons while Quick Sort will sometimes finish much quicker (pun not intended) and other times, just suffer.

As a final remark, our implementation of the Quick Sort is not the most optimal as we go through the list twice, but it is the most aesthetically pleasing and concise.

X Faster Quick Sort

A slight improvement can be made to the implementation by not using list comprehension and instead using a helper function, to traverse the list only once.

Try to figure out this implementation.

§7.2. Zip it up!

Have you ever suffered through a conversation with a very dry person with the goal of getting the contact information of a person you are actually interested in? If you haven't well, that is what you will have to do now.

X The boring zip

```
Haskell has an inbuilt function called zip. It's behavior is as follows

>>> zip [1,2,3] [4,5,6]
[(1,4),(2,5),(3,6)]
>>> zip [1,2,3] [4,5,6,7]
[(1,4),(2,5),(3,6)]
>>> zip [0,1,2,3] [4,5,6]
[(0,4),(1,5),(2,6)]
>>> zip [0,1,2,3] [True, False, True, False]
[(0,True),(1,False),(2,True),(3,False)]
>>> zip [True, False, True, False] "abcd"
[(True,'a'),(False,'b'),(True,'c'),(False,'d')]
>>> zip [1,3..] [2,4..]
[(1,2),(3,4),(5,6),(7,8),(9,10),(11,12),(13,14),(15,16),(17,18),(19,20)...]

What is the type signature of zip? How would one implement zip?
```

The solution to the above exercise is, rather simply:

```
    Implementation of zip function

    zip :: [a] → [b] → [(a,b)]

    zip [] _ = []

    zip _ [] = []

    zip (x:xs) (y:ys) = (x,y) : zip xs ys
```

While one could think of some places where this is useful, all of the uses seem rather dry. But now that zip has opened up to us, we will ask them about zipWith. The function zipWith takes two lists, a binary function, and joins the lists using the function. The possible implementations are:

X Alternate definitions

```
While we have defined zip and zipWith independently here, can you:

(i) Define zip using zipWith?

(ii) Define zipWith using zip?
```

Now one might feel there is nothing special about zipWith as well, but they would be wrong. First, it saves us form defining a lot of things: zipWith (+) [0,2,5] [1,3,3] = [1,5,8] is a common enough use. And then, it leads to a lot of absolutely mindblowing pieces of code.

```
The zipWith fibonacci
fibs = 0 : 1 : zipWith (+) fibs (tail fibs)
```


Believe it or not, this should output the fibonacci sequence. The idea is that Haskell is lazy! This means lists are computed one element at a time, starting from the first. Tracing the computation of the elements of fibs:

- 1. Since by definition fibs = 0: 1: (something), the first element is 0.
- 2. This is again easy, since fibs = 0 : 1 : (something), so the second element is 1.
- 3. This is going to be the first element of something, i.e. the part that comes after the 0 : 1 : . So, we need to compute the first element of zipWith (+) fibs (tail fibs). How do we do this? We compute the first element of fibs and the first element of tail fibs and add them. We know already, that the first element of fibs is 0. And we also know that the first element of tail fibs is the second element of fibs, which is 1 So, the first element of zipWith (+) fibs (tail fibs) is 0 + 1 = 1.
- 4. It the fourth element of fibs is going to he and the second of zipWith (+) fibs (tail fibs). Again, we do this by taking the second elements of fibs and tail fibs and adding them together. We know that the second element of fibs is 1. The second element of tail fibs is the third element of fibs. But we just computed the third element of fibs, so we know it is 1. Adding them together we get that the fourth element of fibs is 1 + 1 = 2.

This goes on and one to generate the fibonacci sequence. To recall, the naive

```
fibNaive 0 = 0
fibNaive 1 = 1
fibNaive n = \text{fibNaive }(n-1) + \text{fibNaive }(n-2)
```

is much slower. This is because the computation tree for say fib 5 looks something like:

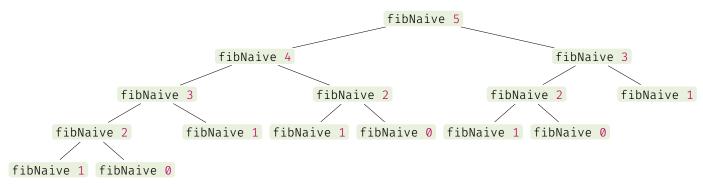

And one can easily see that we make a bunch of unnecessary recomputation, and thus a lot of unnecessary additions. On the other hand, using our zipWith method, only computes things once, and hence makes only as many additions as required.

X Exercise

```
Try to trace the computation of fib !! 5 and make a tree.
```

Let's now try using this trick to solve some harder problems.

X Tromino's Pizza I

Tromino's sells slices of pizza in only boxes of 3 pieces or boxes of 5 pieces. You can only buy a whole number of such boxes. Therefore it is impossible to buy exactly 2 pieces, or exactly 4 pieces, etc. Create list possiblePizza such that if we can buy exactly n slices, possiblePizza !! n is True and False otherwise.

The solution revolves around the fact $f(x) = f(x-3) \lor f(x-5)$. A naive implementation could be

This is slow for the same reason as fibNaive. So what can we do? Well, use zipWith.

```
possiblePizza = True : False : False : True : False : zipWith (||)
(possiblePizza) (drop 2 possiblePizza)
```

Note, we need to define till the 5th place as otherwise the code has no way to know we can do 5 slices.

X Tromino's Pizza II

Tromino's has started to charge a box fees. So now given a number of slices, we want to know the minimum number of boxes we can achieve the order in. Create a list minBoxPizza such that if we can buy exactly n slices, the list displays Just the minimum number of boxes the order can be achieved in, and Nothing otherwise. The list is hence of type [Maybe Int].

Hint: Create a helper function to use with the zipWith expression.

One more interesting thing we can talk about is higher dimensional zip and zipWith. One way to talk about them is $zip3 :: [a] \rightarrow [b] \rightarrow [c] \rightarrow [(a,b,c)]$ and $zipWith3 :: (a \rightarrow b \rightarrow c \rightarrow d) \rightarrow [a] \rightarrow [b] \rightarrow [c] \rightarrow [d]$. These are defined exactly how might expect them to be.

```
zip3 :: [a] \rightarrow [b] \rightarrow [c] \rightarrow [(a,b,c)]
zip3 [] _ _ = []
zip3 _ _ [] _ = []
zip3 _ _ [] = []
zip3 (x:xs) (y:ys) (z:zs) = (x,y,z) : zip3 xs ys zs

zipWith3 :: (a \rightarrow b \rightarrow c \rightarrow d) \rightarrow [a] \rightarrow [b] \rightarrow [c] \rightarrow [d]
zipWith3 _ _ [] _ _ = []
zipWith3 _ _ _ [] _ = []
zipWith3 f (x:xs) (y:ys) (z:zs) = (f x y z) : zipWith3 f xs ys zs
```

x Exercise

A slightly tiresome exercise, try to define zip4 and zipWith4 blind.

Haskell predefines till zip7 and zipWith7. We are yet to see anything beyond zipWith3 used in code, so this is more than enough. Also, if you truly need it, zip8 and zipWith8 are not that hard to define.

X Tromino's Pizza III

Tromino's has introduced a new box of size 7 slices. Now they sell 3, 5, 7 slice boxes. They still charge the box fees. So now given a number of slices, we still want to know the minimum number of boxes we can achieve the order in. Create a list minBoxPizza such that if we can buy exactly n slices, the list displays Just the minimum number of boxes the order can be achieved in, and Nothing otherwise. The list is hence of type [Maybe Int].

Another idea of dimension would be something that could join together two grids, something with type signature $zip2d :: [[a]] \rightarrow [[b]] \rightarrow [[(a,b)]]$ and $zipWith2d :: (a \rightarrow b \rightarrow c) \rightarrow [[a]] \rightarrow [[b]] \rightarrow [[c]]$.

The second definition should raise immediate alarms. It seems too good to be true. Let's formally check

Also surprisingly, zipWith . zipWith has the type signature $(a \rightarrow b \rightarrow c) \rightarrow [[[a]]] \rightarrow [[[b]]] \rightarrow [[[c]]]$. You can see where we are going with this...

X Composing zipWith's

```
What should the type signature and behavior of zipWith . <n times> . zipWith be? Prove it.
```

X Unzip

Haskell has an inbuilt function called unzip :: $[(a,b)] \rightarrow ([a],[b])$ which takes a list of pairs and provides a pair of list in the manner inverse of zip.

Try to figure out the implementation of unzip.

§ 7.3. Folding, Scanning and The Gate to True Powers

§7.3.1. Origami of Code!

A lot of recursion on lists has the following structure

```
g[] = v -- The vacuous case

g(x:xs) = x 'f' (gxs)
```

That is, the function $g :: [a] \to b$ maps the empty list to a value v, of say type b, and for non-empty lists, the head of the list and the result of recursively processing the tail are combined using a function or operator $f :: a \to b \to b$.

Some common examples from the inbuilt functions are:

```
sum :: [Int] → Int
sum [] = 0
sum (x:xs) = x + (sum xs)

product :: [Int] → Int
product [] = 1 -- The structure forces this choice as other wise, the
product of full lists may become incorrect.
product (x:xs) = x * (product xs)

or :: [Bool] → Bool
or [] = False -- As the structure of our implementation forces this to be
false, or otherwise, everything is true.
or (x:xs) = x || (or xs)

and :: [Bool] → Bool
and [] = True
and (x:xs) = x && (and xs)
```

We will also see a few more examples in a while, but one can notice that this is a common enough pattern. So what do we do? We abstract it.

```
* Definition of foldr

foldr :: (a \rightarrow b \rightarrow b) \rightarrow b \rightarrow [a] \rightarrow b

foldr _ v [] = v

foldr f v (x:xs) = x `f` (foldr f v xs)
```

This shortens our definitions to

```
sum = foldr (+) 0
product = foldr (*) 1
or = foldr (||) False
and = foldr (&&) True
```

Sometimes, we don't wish to define a base case or maybe the logic makes it so that doing so is not possible, then you use foldr1 :: $(a \rightarrow b \rightarrow b) \rightarrow [a] \rightarrow a$ defined as

```
Definition of foldr1
foldr1 :: (a \rightarrow a \rightarrow a) \rightarrow [a] \rightarrow a
foldr1 _ [x] = x
foldr1 f (x:xs) = x `f` (foldr f xs)
```


Like we could now define product = foldr1 (*) which is much more clean as we don't have to define a weird vacous case.

Let's now discuss the naming of the pattern. Recall, [1,2,3,4] is syntactic sugar for 1 : 2 : 3 : 4 : []. We are just allowed to write the former as it is more aesthetic and convenient. One could immediately see that


```
foldr v f [1,2,3,4] = 1 `f` (2 `f` (3 `f` (4 `f` v)))
-- and if f is right associative
= 1 `f` 2 `f` 3 `f` 4 `f` v
```

We have basically changed the cons (:) into the function and the empty list ([]) into v. But notice the brackets, the evaluation is going from right to left.

Using trees, A list can be represented in the form



which is converted to:



However, what if our function is left associative? After all, if this was the only option, we would have called it fold, not foldr right?

The recursive pattern

```
g :: (b \rightarrow a \rightarrow b) \rightarrow b \rightarrow [a] \rightarrow b

g v [] = v

g f v (x:xs) = g (f v x) xs
```

is abstracted to foldl and foldl1 respectively.

```
**Definition of foldl and foldl1 foldl :: (b \rightarrow a \rightarrow b) \rightarrow b \rightarrow [a] \rightarrow b foldl _ v [] = v foldl f v (x:xs) = foldl f (f v x) xs

foldl1 :: (a \rightarrow a \rightarrow a) \rightarrow [a] \rightarrow a foldl1 f (x:xs) = foldl f x xs
```

And as the functions we saw were commutative, we could define them as


```
sum = foldl (+) 0
product = foldl (*) 1
or = foldl (||) False
and = foldl (&&) True
```

There is one another pair of function defined in the fold family called foldl' and foldl' which are faster than foldl and foldl1 and don't require a lot of working memory. This makes them the defualts used in most production code, but to understand them well, we need to discuss how haskell's lazy computation actually works and is there a way to bypass it. This is done in chapter 9. We will use foldl and foldl1 till then.


The computation of foldl proceeds like

```
foldl v f [1,2,3,4] = ((((v `f` 1) `f` 2) `f` 3) `f` 4)
-- and if f is left associative
= v `f` 1 `f` 2 `f` 3 `f` 4
```

Or in tree form as



which is converted to:



Similar to how unzip was for zip, could we define unfoldr, something that takes a generator function and a seed value and generates a list out of it.

What could the type of such a function be? Well, like with every design problem; let's see what our requirements are:

- The list should not just be one element over and over. Thus, we need to be able to update the seed after every unfolding.
- There should be a way for the list to terminate.

So what could the type be? We can say that our function must spit out pairs: of the new seed value and the element to add to the list. But what about the second condition?

Well, what if we can spit out some seed which can never come otherwise and use that to signal it? The issue is, that would mean the definition of the function has to change from type to type.

Instead, can we use something we studied in ch-6? Maybe. 10

```
    Implementation of unfoldr
unfoldr :: (a → Maybe (a,b)) → a → [b]
unfoldr gen seed = go seed
    where
    go seed = case gen seed of
        Just (x, newSeed) → x : go newSeed
        Nothing → []
```

For example, we could now define some library functions as:

```
replicate :: Int → a → [a]
-- replicate's an value n times
replicate n x = unfoldr gen n x where
    rep 0 = Nothing
    rep m = Just (x, m - 1)

iterate :: (a → a) → a → [a]
-- given a function f and some starting value x
-- outputs the infinite list [x, f x, f f x, ...]
iterate f seed = unfold (\x → Just (x, f x)) seed
```

While foldr and foldl are some of the most common favorite function of haskell programers; remains mostly ignored. It is so ignored that to get the inbuilt version, one has to import Data.List. We will soon see an egregious case where Haskell's own website ignored it. One of the paper we referred was literally titled "The Under-Appreciated Unfold".

X Some more inbuilt functions

```
Implement the following functions using fold and unfold.
```

```
(i) concat :: [[a]] \rightarrow [a] concats a list of lists into a single list. For example: concat [[1,2,3],[4,5,6],[7,8],[],[10]] = [1,2,3,4,5,6,7,8,9, 10]
```

```
(ii) cycle :: [a] \rightarrow [a] cycles through the list endlessly. For example: cycle [2, 3, 6, 18] = [2, 3, 6, 18, 2, 3, ...]
```

(iii) filter :: $(a \rightarrow Bool) \rightarrow [a] \rightarrow [a]$ takes a predicate and a list and filters out the elements satisfying that predicate.

(iv) $concatMap :: (a \rightarrow [b]) \rightarrow [a] \rightarrow [b]$ maps a function over all the elements of a list and concatenate the resulting lists. Do not use map in your definition.

(v) length $:: [a] \to Int$ gives the number of elements in the provided list. Use foldr or foldl.

¹⁰Pun intended.

X Base Conversion

- (i) Convert list of digits in base k to a number. That is lis2num :: Int → [Int] → Int with the usage lis2num base [digits].
 (ii) Given a number in base 10, convert to a list of digits in base k.
- Let's go part by part. The idea of the first question is simply to understand that [4,2,3] in base k represents $4 * k^2 + 2 * k + 3 * k^0 = ((0 * k + 4) * k + 2) * k + 3$; doesn't this smell like fold?

num2lis :: Int \rightarrow Int \rightarrow [Int] with the usage num2list base numberInBase10

```
lis2num :: [Int] \rightarrow Int \rightarrow Int
lis2num k = foldl (x y \rightarrow k * x + y) 0
```

For part two, the idea is that we can base convert using repeated division. That is,

```
423 `divMod` 10 = (42, 3)
42 `divMod` 10 = (4, 2)
4 `divMod` 10 = (0, 4)
```

It is clear that we terminate when the quotient reaches 0 and then just take the remainders. Does this sound like unfoldr?

```
num2lis :: Int → Int → [Int]
num2lis k = reverse . unfoldr gen where
  gen 0 = Nothing
  gen x = Just $ (x `mod` k, x `div` k)
```

X A list of Primes

This is the time when Haskell itself forgot that the unfoldr function exists. The website offers the following method to make a list of primes in Haskell as an advertisement for the language.

```
primes = filterPrime [2..] where
filterPrime (p:xs) =
  p : filterPrime [x | x ← xs, x `mod` p ← 0]
```

Understand this code (write a para explaining exactly what is happening!) and try to define a shorter (and more aesthetic) version using unfoldr.

The answer is literally doing what one would do on paper. Like describing it would be a disservice to the code.

```
**list of primes using unfoldr sieve (x:xs) = Just (x, filter (\y \rightarrow y `mod` x \not= 0) xs) primes = unfoldr sieve [2..]
```

X Subsequences

```
Write a function subslists :: [a] \rightarrow [[a]] which takes a list and returns a list of sublists
of the given list. For example: sublists "abc" = "", "a", "b", "ab", "c", "ac", "bc", "abc"
and sublists [24, 24] = [[],[24],[24],[24,24]].
Try to use the fact that a sublist either contains an element or not. Second, the fact that sublists
correspond nicely to binery numerals may also help.
       function
                                                  with
                                                           infinite
You
                    must be
                                   compatible
                                                                      lists.
                                                                               that
                                                                                       is
take 10 $ sublists [1..] = [[], [1], [2], [1,2], [3], [1,3], [2,3], [1,2,3],
should work.
```

Please fill in the blanks below

A naive, non-infinite compatible definition is:

```
sublists [] = ____ subslists (x:xs) = concatMap (\ys \rightarrow ____) (sublists xs)
```

On an infinite list, this definition gets stuck in an non-productive loop because we must traverse the entire list before it returns anything.

Note that on finite cases, the first sublist returned is always ______. This means we can state this as sublists xs == _____ : _____ (sublists xs). It is sensible to extend this equality to the infinite case, due to the analogy of ______.

By making this substitution, we produce the definition that can handle infinite lists, from which we can calculate a definition that's more aesthetically pleasing and slightly more efficient:

```
_____ -- Base case sublists (x:xs) = ____ : concatMap (\ys \rightarrow ____) (tail . sublists xs)
```

We can clean this definition up by calculating definitions for tail.sublists x and renaming it something like nonEmpties. We start by applying tail to both sides of the two cases. nonEmpties [] = tail.sublists [] = _____ and nonEmpties (x:xs) = tail.sublists (x:xs) = _____

Substituting all thins through the definition.

```
No Space to write the definition of sublists
```

This function can be called in Haskell through the subsequences function one gets on importing Data.Lists. Our definition is the most efficient and is what is used internally.

Finally, a question which would require you to use a lot of functions we just defined:

X The Recap Problem (Euler's Project 268)

It can be verified that there are 23 positive integers less than 1000 that are divisible by at least four distinct primes less than 100.

Find how many positive integers less than 10^{16} are divisible by at least four distinct primes less than 100.

Hint : Think about PIE but not π .

Something we mentioned was that foldr and unfoldr are inverse (or more accurately duel) of each other. But their types seem so different. How do we reconcile this?

$$\begin{split} \text{foldr} :: (a \to b \to b) \to b & \to [a] \to b \\ & \cong (a \times b \to b) \to b & \to [a] \to b \\ & \cong (a \times b \to b) \to (1 \to b) \to [a] \to b \\ & \cong (a \times b \cup 1 \to b) & \to [a] \to b \\ & \cong (\text{Maybe}(a,b) \to b) & \to [a] \to b \end{split}$$
 Notice, unfoldr :: $(b \to \text{Maybe}(a,b)) & \to b \to [a]$

And now the duality emerges. $(\text{foldr } f)^{-1} = \text{unfoldr } f^{-1}$.

Some more ideas on the nature of fold can be found in the upcoming chapters on datatypes as well as in the appendix.

Another type of function we sometimes want to define are:

```
sumlength :: [Int] → (Int,Int)
sumlength xs = (sum xs, length xs)
```

This is bad as we traverse the list twice. We could do this twice as fast using

```
sumlength :: [Int] \rightarrow (Int, Int)
sumlength = foldr (\x (a,b) \rightarrow (a+x, b + 1)) (0,0)
```

This might seem simple enough, but this idea can be taken to a diffrent level rather immidietly.

X Ackerman Function

The Ackerman function is defined as follows:

```
ack :: [Int] \rightarrow [Int] \rightarrow [Int]

ack [] ys = 1 : ys

ack (x : xs) [] = ack xs [1]

ack (x : xs) (y : ys) = ack xs (ack (x : xs) ys)
```

Define this in one single line using foldr.

Let's say foldr $f v \cong ack$.

```
\Rightarrow ack [] = v

\Rightarrow ack (x:xs) = f x (ack xs)
```

This means v = (1:) . unfortunatly, figuring out f seems out of reach. Luckily, we are yet to use all the information the function provides.

Let's say foldr g w \cong ack (x:xs).

```
⇒ ack (x:xs) [] = w
⇒ ack (x:xs) (y:ys) = g y (ack (x:xs) ys)
```

This means $w = ack \times s$ [1] and

```
ack (x:xs) (y:ys)

= g y (ack (x:xs) ys) \iff ack xs (ack (x : xs) ys)

(canceling on both sides)

\implies g y = ack xs

\implies g = (\y z \implies ack xs z)
```

```
Thus, g = (\y z \rightarrow ack xs z).
```

And finally, now working towards f, we get

```
ack (x:xs)

= f x (ack xs) \iff foldr (\y z \rightarrow ack xs z) (ack xs [1])

(substitution of a = ack xs)

\implies f x a \iff foldr (\y z \rightarrow a z) (a [1])

\implies f = (\x a \rightarrow foldr (\y z \rightarrow a z) (a [1]))
```

This gives us the definiton

```
ack :: [Int] \rightarrow [Int] \rightarrow [Int] ack = foldr (\x a \rightarrow foldr (\y z \rightarrow a z) (a [1])) (1:)
```

This might seem like a rather messy definition, but from a theoretical point of view, even this has it's importence. The main thing is that folding is faster than recursion at runtime so if no additional overhead is there, folds will run faster.

It is possible, but out of the scope of our current undertaking, to prove that all primitive recursive functions can be written as folds. What does primitive recursive functions mean? Well, that is left for your curiosity.

X Removing duplicates

Haskell has inbuilt function $nub :: Eq a \Rightarrow [a] \rightarrow [a]$ which is used to remove duplicates in a list. Write a recursive definition of nub and then write a definition using folds.

Haskell also has an inbuilt function $nubBy :: (a \rightarrow a \rightarrow Bool) \rightarrow [a] \rightarrow [a]$ which is used to remove elements who report true to some property. That is $nubBy (\x y \rightarrow x + y == 4) [1,2,3,4,2,0] = [1,2,4]$ as 1+3=4, 2+2=4, 4+0=4. Write a recursive definition of nubBy and then write a definition using folds.

X More droping and more taking

```
dropWhile :: (a \rightarrow Bool) \rightarrow [a] \rightarrow [a] and takeWhile :: (a \rightarrow Bool) \rightarrow [a] \rightarrow [a] take a predicate and a list and drop all elements while the predicate is satisfied and take all objects while the predicate is satisfied respectively.
```

Implement them using recursion and then using folds.

§7.3.2. Numerical Integration

To quickly revise all the things we just learnt, we will try to write our first big-boy code.

Let's talk about numerical Integration. Numerical Integration refers to finding the value of integral of a function, given the limits. This is also a part of the mathematical computing we first studied in chapter 3. To get going, a very naive idea would be:

```
easyIntegrate :: (Float \rightarrow Float) \rightarrow Float \rightarrow Float \rightarrow Float easyIntegrate f a b = (f b + f a) * (b-a) / 2
```

This is quite inaccurate unless a and b are close. We can be better by simply dividing the integral in two parts, ie $\int_a^b f(x) \partial x = \int_a^m f(x) \partial x + \int_m^b f(x) \partial x$ where a < m < b and approximate these parts. Given the error term is smaller in these parts than that of the full integral, we would be done. We can make a sequence converging to the integral we are intrested in as:

```
Naive Integration
integrate :: (Float → Float) → Float → Float → [Float]
integrate f a b = (easyIntegrate f a b) : zipWith (+) (integrate f a m)
(integrate f m b) where m = (a+b)/2
```

If you are of the kind of person who likes to optimize, you can see a very simple inoptimality here. We are computing fm far too many times. Considering, f might be slow in itself, this seems like a bad idea. What do we do then? Well, ditch the aesthetic for speed and make the naive integrate as:

```
Naive Integration without repeated computation
integrate f a b = go f a b (f a) (f b)

integ f a b fa fb = ((fa + fb) * (b-a)/2) : zipWith (+) (integ f a m fa fm)
(integ f m b fm fb) where
    m = (a + b)/2
    fm = f m
```

This process is unfortunatly rather slow to converge for a lot of fucntions. Let's call in some backup from math then.

The elements of the sequence can be expressed as the correct answer plus some error term, ie $a_i=A+$ E. This error term is roughly proportional to some power of the seperation between the limits evaluated (ie $(b-a), \frac{b-a}{2}...$) (the proof follows from Taylor exmapnsion of f. You are reccomended to prove the same). Thus,

$$\begin{split} a_i &= A + B \times \left(\frac{b-a}{2^i}\right)^n \\ a_{i+1} &= A + B \times \left(\frac{b-a}{2^{i+1}}\right)^n \\ \Rightarrow a_{i+1} - \frac{1}{2^n} a_i &= A \left(1 - \frac{1}{2^n}\right) \\ \Rightarrow A &= \frac{2^n \times a_{i+1} - a_i}{2^n - 1} \end{split}$$

This means we can improve our sequence by eliminating the error

```
elimerror :: Int \rightarrow [Float] \rightarrow [Float]
elimerror n (x:y:xs) = (2^n * y - x) / (2^n - 1) : elimerror n (y:xs)
```

However, we have now found a new problem. How in the world do we get n?

$$\begin{aligned} a_i &= A + B \times \left(\frac{b-a}{2^i}\right)^n \\ a_{i+1} &= A + B \times \left(\frac{b-a}{2^{i+1}}\right)^n \\ a_{i+2} &= A + B \times \left(\frac{b-a}{2^{i+2}}\right)^n \\ \Rightarrow a_i - a_{i+1} &= B \times \left(\frac{b-a}{2^i}\right)^n \times \left(1 - \frac{1}{2^n}\right) \\ \Rightarrow a_{i+1} - a_{i+2} &= B \times \left(\frac{b-a}{2^i}\right)^n \times \left(\frac{1}{2^n} - \frac{1}{4^n}\right) \\ \Rightarrow \frac{a_i - a_{i+1}}{a_{i+1} - a_{i+2}} &= \frac{4^n - 2^n}{2^n - 1} = \frac{2^n(2^n - 1)}{2^n - 1} = 2^n \\ \Rightarrow n &= \log_2\left(\frac{a_i - a_{i+1}}{a_{i+1} - a_{i+2}}\right) \end{aligned}$$

Thus, we can estimate n using the function order. We will be using the inbuilt function round :: (RealFrac a, Integral b) \rightarrow a \rightarrow b in doing so. In our case, round :: Float \rightarrow Int.

```
order :: [Float] \rightarrow Int
order (x:y:z:xs) = round $ logBase 2 $ (x-y)/(y-z)
```

This allows us to improve our sequence

```
improve :: [Float] → [Float]
improve xs = elimerror (order xs) xs
```

One could make a very fast converging sequence as say improve \$ improve \$ improve \$ integrate f a b.

But based on the underlying function, the number of improve may differ.

So what do we do? We make an extreamly clever move to define a super sequence super as

```
super :: [Float] \rightarrow [Float]
super xs = map (!! 2) (iterate improve xs) -- remeber iterate from the excercises above?
```

I will re-instate, the implementation of super is extreamly clever. We are recursivly getting a sequence of more and more improved sequences of approximations and constructs a new sequence of approximations by taking the second term from each of the improved sequences. It turns out that the second one is the best one to take. It is more accurate than the first and doesn't require any extra work to compute. Anything further, requires more computations to compute.

Finally, to complete our job, we define a function to choose the term upto some error.

```
within :: Float → [Float] → Float
within error (x:y:xs)
  | abs(x-y) < error = y
  | otherwise = within error (y:xs)

An optimalized function for numerical integration
ans :: (Float → Float) → Float → Float → Float
ans f a b error = within error $ super $ integrate f a b</pre>
```

With this we are done!

X Simpson's Rule

Here we have used the approximation $\int_a^b f(x) dx = (f(a) + f(b)) \frac{b-a}{2}$ and used divide and conquor. This is called the Trapazoidal Rule in Numerical Analysis.

A better approximation is called the Simpson's (First) Rule.

$$\int_{a}^{b} f(x) dx = \frac{b-a}{6} \left[f(a) + 4f\left(\frac{a+b}{2}\right) + f(b) \right]$$

Modify the code to now use Simpson's Rule. Furthermore, show that this approximation makes sense (the idea is to find a quadratic polynomial which takes the same value as our function at a, $\frac{a+b}{2}$ and b and using its area).

§7.3.3. Time to Scan

We will now talk about folds lesser known cousing scans.

⇒ Scans

While fold takes a list and compresses it to a single value, scan takes a list and makes a list of the partial compressions. Basically,

```
scanr :: (a \rightarrow b \rightarrow b) \rightarrow b \rightarrow [a] \rightarrow [b]
    scanr f v [x_1, x_2, x_3, x_4]
              foldr f v [x_1, x_2, x_3, x_4],
              foldr f v [x_2, x_3, x_4],
              foldr f v [x_3, x_4],
              foldr f v [x_4],
              foldr f v []
              X_1 `f` X_2 `f` X_3 `f` X_4 `f` V,
             X<sub>2</sub> 'f' X<sub>3</sub> 'f' X<sub>4</sub> 'f' V,
X<sub>3</sub> 'f' X<sub>4</sub> 'f' V,
X<sub>4</sub> 'f' V,
              V
           1
and very much similerly as
    scanl :: (b \rightarrow a \rightarrow b) \rightarrow b \rightarrow [a] \rightarrow [b]
    scanl f v [x_1, x_2, x_3, x_4]
       = [
              foldl f v [],
              foldr f v [x_1],
              foldr f v [x_1, x_2],
              foldr f v [x_1, x_2, x_3],
              foldr f v [x_1, x_2, x_3, x_4]
```

There are also very much similer scanr1 and scanl1.11

V 'f' X₁ 'f' X₂, V 'f' X₁ 'f' X₂ 'f' X₃, V 'f' X₁ 'f' X₂ 'f' X₃ 'f' X₄,

= [

v `f` X₁,

The reason the naming is as the internal implementation of these funtions look like similer to the definition of the fold they borrow their name from.

¹¹Similer to our note in fold, there is a function pair scanl' and scanlı', which similer to foldl' and foldlı', and have the same set of benefits. This makes them the defualts, but similerly, to understand them well, we need to discuss how haskell's lazy computation actually works and the way to bypass it. This is done in chapter 9.

```
scanr :: (a \rightarrow b \rightarrow b) \rightarrow b \rightarrow [a] \rightarrow [b]
scanr _ v [] = [v]
scanr f v (x:xs) = x `f` (head part) : part where part = scanr f v xs

scanl :: (b \rightarrow a \rightarrow b) \rightarrow b \rightarrow [a] \rightarrow [b]
scanl _ v [] = [v]
scanl f v (x:xs) = v : scanl f (v `f` x) xs
```

X Scan as a fold

We can define scanr using foldr, try to figure out a way to do so.

X Defining scanlı and scanrı

Modify these definitions and define scanl1 and scanr1.

This seems like a much more convoluted recursion pattern. So why have we decided to study it? Let's see by example

X Not Quite Lisp (AOC 2015, 1)

Santa is trying to deliver presents in a large apartment building, but he can't find the right floor - the directions he got are a little confusing. He starts on the ground floor (floor 0) and then follows the instructions one character at a time.

An opening parenthesis, (, means he should go up one floor, and a closing parenthesis,), means he should go down one floor.

The apartment building is very tall, and the basement is very deep; he will never find the top or bottom floors.

For example:

- (()) and ()() both result in floor 0.
- (((and (()(()(both result in floor 3.
-))(((((also results in floor 3.
- ()) and))(both result in floor –1 (the first basement level).
-))) and)())()) both result in floor -3.

Write a function parse :: String \rightarrow Int which takes the list of parenthesis as a sting in input and gives the correct integer as output.

This is quite simple using folds.

```
parse :: String \rightarrow Int
parse = foldl (\x y \rightarrow if y == '(' then x+1 else x - 1) 0
```

But every AOC question always has a part 2!

X Not Quite Lisp, 2

Now, given the same instructions, find the position of the first character that causes him to enter the basement (floor -1). The first character in the instructions has position 1, the second character has position 2, and so on.

For example:

-) causes him to enter the basement at character position 1.
- ()()) causes him to enter the basement at character position 5.

Make a function ans which takes the list of parenthesis as a sting in input and output the position(1 indexed) of the first character that causes Santa to enter the basement

If we had no idea of scans, this would be harder. In this case, it is just a simple replacement.

```
ans :: String \rightarrow Int ans = length.takeWhile (\not= -1).scanl (\x y \rightarrow if y == '(' then x+1 else x - 1) 0
```

The takewhile chooses all the floors we reach before -1. As 0th floor is counted (as it is the scan on empty list), we will have a list of length as much as the position of the character that caused us to enter -1.

Now, here is a conincidence we didn't expect. We were told that AOC 2015's first question was a good foldl to scanl example. What I was not prepared to see was scanning showing up in AOC 2015's third question as well.

X Perfectly Spherical Houses in a Vacuum (AOC 2015)

Santa is delivering presents to an infinite two-dimensional grid of houses.

He begins by delivering a present to the house at his starting location, and then an elf at the North Pole calls him via radio and tells him where to move next. Moves are always exactly one house to the north (\land) , south (\lor) , east (\gt) , or west (\lt) . After each move, he delivers another present to the house at his new location.

However, the elf back at the north pole has had a little too much eggnog, and so his directions are a little off, and Santa ends up visiting some houses more than once. How many houses receive at least one present?

For example:

- > delivers presents to 2 houses: one at the starting location, and one to the east.
- ^>v< delivers presents to 4 houses in a square, including twice to the house at his starting/ending location.

Create function solve1 :: String \rightarrow Int which takes the list of instructions as string in input and outputs the number of hourses visited.

X Perfectly Spherical Houses in a Vacuum II

The next year, to speed up the process, Santa creates a robot version of himself, Robo-Santa, to deliver presents with him.

Santa and Robo-Santa start at the same location (delivering two presents to the same starting house), then take turns moving based on instructions from the elf, who is eggnoggedly reading from the same script as the previous year.

This year, how many houses receive at least one present?

For example:

- ^v delivers presents to 3 houses, because Santa goes north, and then Robo-Santa goes south.
- ^>v< now delivers presents to 3 houses, and Santa and Robo-Santa end up back where they started.
- ^v^v^v^v now delivers presents to 11 houses, with Santa going one direction and Robo-Santa going the other.

Create function solve2 :: String \rightarrow Int which takes the list of instructions as string in input and outputs the number of hourses visited.

We will also breifly talk about something called Segmented Scan.

• Segmented Scan

A scan can be broken into segments with flags so that the scan starts again at each segment boundary. Each of these scans takes two vectors of values: a data list and a flag list. The segmented scan operations present a convenient way to execute a scan independently over many sets of values.

For example, a segmented looks like is:

```
1 2 3 4 5 6 -- Input  
T F F T F T -- Flag  
1 3 6 4 9 6 -- Result  
We will name this function segScan :: (a \rightarrow a \rightarrow b) \rightarrow [Bool] \rightarrow [a] \rightarrow [b].
```

The implementation of function is as follows

```
segScan :: (a → a → b) → [Bool] → [a] → [b]
segScan f flag str = scanl (\r (x,y) → if x then y else r `f` y) (head str)
(tail (zip flag str))
```

This might seem complex but we are merely zip -ing the flags and input values, and defining a new function, say g which applies the function f, but resets to y (the new value) whenever x (the flag) is True. The head and tail are to ensure that the first element is the beginning of the first segment.

This will be the end of my discussion of this. The major use of segmented scan is in parallel computation algorithms. A rather complex quick sort parallel algorithm can be created using this as the base.

§7.4. Excercises

x Factors

- (i) Write an optimized function factors :: Int \rightarrow [Int] which takes in an integer and provides a list of all it's factors.
- (ii) Write an optimized function primeFactors :: Int \rightarrow [Int] which takes in an integer and provides a list of all it's prime factors, repeated wrt to multiplicity. That is primeFactors 100 = [2,2,5,5].

X Trojke (COCI 2006, P3)

Mirko and Slavko are playing a new game, Trojke (Triplets). First they use a chalk to draw an $N \times N$ square grid on the road. Then they write letters into some of the squares. No letter is written more than once in the grid.

The game consists of trying to find three letters on a line as fast as possible. Three letters are considered to be on the same line if there is a line going through the centre of each of the three squares (horizontal, vertical and diagonal).

After a while, it gets harder to find new triplets. Mirko and Slavko need a program that counts all the triplets, so that they know if the game is over or they need to search further.

Write a function trojke :: [String] \rightarrow Int which takes the contents of the lines and outputs the number of lines.

Example:

```
trojke [
  "...D",
  ".B..",
  "A ... "
] = 4
trojke [
"..T..",
"A....",
".FE.R",
"....X",
"S...."
] = 3
trojke [
"....AB....",
"..C....D..."
".E....F."
" ... G .. H ... '
"I.....J",
"K....L",
"...M..N...",
".0.....P."
" .. Q . . . . R .. '
"....ST....
] = 0
```

X Deathstar (COCI 2015, P3)

Young jedi Ivan has infiltrated in The Death Star and his task is to destroy it. In order to destroy The Death Star, he needs an array A of non-negative integers of length N that represents the code for initiating the self-destruction of The Death Star. Ivan doesn't have the array, but he has a piece of paper with requirements for that array, given to him by his good old friend Darth Vader.

On the paper, a square matrix of the size is written down. In that matrix, in the row i and column j there is a number that is equal to bitwise and between numbers a_i and a_j . Unfortunately, a lightsaber has destroyed all the fields on the matrix's main diagonal and Ivan cannot read what is on these fields. Help Ivan to reconstruct an array for the self-destruction of The Death Star that meets the requirements of the matrix.

The solution doesn't need to be unique, but will always exist. Your function $destroy :: [[Int]] \rightarrow [Int]$ only needs to find one of these sequences.

Example:

```
destroy [
  [0,1,1],
  [1,0,1],
  [1,1,0]] = [1,1,1]

destroy [
  [0,0,1,1,1]
  [0,0,2,0,2]
  [1,2,0,1,3]
  [1,0,1,0,1]
  [1,2,3,1,0]] = [1,2,3,1,11]
```

Extra Credit: There is a way to do this in one line.

X Nucleria (CEOI 2015 P5

Long ago, the people of Nuclearia decided to build several nuclear plants. They prospered for many years, but then a terrible misfortune befell them. The land was hit by an extremely strong earthquake, which caused all the nuclear plants to explode, and radiation began to spread throughout the country. When the people had made necessary steps so that no more radiation would emanate, the Ministry of Environment started to find out how much individual regions were polluted by the radiation. Your task is to write a function quary :: (Int, Int) \rightarrow [(Int, Int, Int, Int)] \rightarrow Float that will find the average radiation in Nuclearia given data.

Nuclearia can be viewed as a rectangle consisting of $W \times H$ cells. Each nuclear plant occupies one cell and is parametrized by two positive integers: a, which is the amount of radiation caused to the cell where the plant was, and b, which describes how rapidly the caused radiation decreases as we go farther from the plant.

More precisely, the amount of radiation caused to cell $C=(x_C,y_C)$ by explosion of a plant in cell $P=(x_P,y_P)$ is $\max(0,a-b\cdot d(P,C))$, where d(P,C) is the distance of the two cells, defined by $d(P,C)=\max(|x_P-x_C|,|y_P-y_C|)$ (i.e., the minimum number of moves a chess king would travel between them).

The total radiation in a cell is simply the sum of the amounts that individual explosions caused to it. As an example, consider a plant with a=7 and b=3. Its explosion causes 7 units of radiation to the cell it occupies, 4 units of radiation to the 8 adjacent cells, and 1 unit of radiation to the 16 cells whose distance is 2.

The Ministry of Environment wants to know the average radiation per cell. The input will be in the form quary (W, H) [(x1,y1,a1,b1), (x2,y2,a2,b2)] where we first give the size of Nucleria and then the position of plants and their parameter.

Example:

```
quary (4,3) [(1,1,7,3),(3,2,4,2)] = 3.67
```

The radiation in Nuclearia after the two explosions is as follows:

7632

4652

1332

X Garner's Algorithm

A consequence of the Chinese Remainder Theorem is, that we can represent big numbers using an array of small integers. For example, let $\,p\,$ be the product of the first $\,1000\,$ primes. $\,p\,$ has around $\,3000\,$ digits.

Any number a less than p can be represented as a list $a_1,...,a_k$, where $a_i\equiv a \operatorname{mod}(p_i)$. But to do this we obviously need to know how to get back the number a from its representation (which we will call the CRT form).

Another form for numbers is called the mixed radix form. We can represent a number a in the mixed radix representation as: $a = x_1 + x_2p_1 + x_3p_1p_2 + ... + x_kp_1...p_{k-1}$ with $x_i \in [0, p_i)$

- (i) Make a list of first 1000 primes. Call it primeThousand :: [Int].
- (ii) Write function encode :: Int \rightarrow [Int] which encodes a number into the CRT form.
- (iii) You had constructed an extreamly fast way to compute modulo inverses in ${}^{\rm X}$ Modulo Inverse. Use it to create residue :: [[Int]] such that r_{ij} denotes he inverse of p_i modulo p_j .
- (iv) Garner's algorithm converts from the CRT from to the mixed radix form. We want you to implement garner :: [Int] \rightarrow [Int] . The idea of the algorithm is as follows:

Substituting a from the mixed radix representation into the first congruence equation we obtain

$$a_1 \equiv x_1 \mod(p_1).$$

Substituting into the second equation yields

$$a_2 \equiv x_1 + x_2 p_1 \operatorname{mod}(p_2),$$

which can be rewritten by subtracting x_1 and dividing by p_1 to get

$$\begin{aligned} a_2 - x_1 &\equiv x_2 p_1 & \mod(p_2) \\ (a_2 - x_1) r_{12} &\equiv x_2 & \mod(p_2) \\ x_2 &\equiv (a_2 - x_1) r_{12} \operatorname{mod}(p_2) \end{aligned}$$

Similarly we get that

$$x_3 \equiv ((a_3 - x_1)r_{13} - x_2)r_{23} \mod(p_3).$$

- (v) Finally, now write a function $\frac{\text{decodeMixed}}{\text{decodeMixed}} :: [Int] \rightarrow Int]$ which decodes from the mixed radix form.
- (vi) Finally, combine these functions and write a $decode :: [Int] \rightarrow Int$ which decodes from CRT form.

Note: We find it extreamly cool to know that so much of math goes on in simply reprasenting big integers in high accuracy systems. Like from airplane cockpits to rocker simulations to some games like Valorent, a very cool algorithm is keeping it up and running.

X Shanks Baby Steps-Giant Steps algorithm

A surprisingly hard problem is, given a,b,m computing x such that $a^x \equiv b \mod m$ efficiently. This is called the discrete logirithm. We will try to walk through implementing an algorithm to do so efficiently. At the end, you are expected to make a function $dlog :: Int \rightarrow Int \rightarrow Int \rightarrow Maybe Int$ which takes in a,b and m and returns x such that $a^x \equiv b \mod m$ if it exists.

Let x = np - q, where n is some pre-selected constant (by the end of the description, we want you to think of how to choose n).

We can also see that $p \in \{1, 2, ..., \lceil \frac{m}{n} \rceil \}$ and $q \in \{0, 1, ..., n-1\}$.

p is known as giant step, since increasing it by one increases x by n. Similarly, q is known as baby step. Try to find the bounds

Then, the equation becomes: $a^{np-q} \equiv b \mod m$.

Using the fact that a and m are relatively prime, we obtain:

```
a^{np} \equiv ba^q \mod m
```

So we now need to find the p and q which satisfies this. Well, that can be done quite easily, right?

Keeping in mind \times Modular Exponentiation, what n should we choose to be most optimal?

X A very cool DP (Codeforces)

Giant chess is quite common in Geraldion. We will not delve into the rules of the game, we'll just say that the game takes place on an $h \times w$ field, and it is painted in two colors, but not like in chess. Almost all cells of the field are white and only some of them are black. Currently Gerald is finishing a game of giant chess against his friend Pollard. Gerald has almost won, and the only thing he needs to win is to bring the pawn from the upper left corner of the board, where it is now standing, to the lower right corner. Gerald is so confident of victory that he became interested, in how many ways can he win?

The pawn, which Gerald has got left can go in two ways: one cell down or one cell to the right. In addition, it can not go to the black cells, otherwise the Gerald still loses. There are no other pawns or pieces left on the field, so that, according to the rules of giant chess Gerald moves his pawn until the game is over, and Pollard is just watching this process.

Write a function wins $:: (Int, Int) \to [(Int,Int)] \to Int$ to compute the number of ways to win on a (w,h) grid with black squares at given coordinates. The pawn starts at (1,1) and we must go till (w,h).

Examples

```
wins (3,4) [(2,2),(2,3)] = 2
wins (100,100) [(15,16),(16,15),(99,98)] = 545732279
```

Hint: This is a very hard question to do optimally. The 'standard' way to do so would be making a function ways :: (Int,Int) \rightarrow Integer and counting the ways to every square recursively and setting the black squares as 0.

This is not optimal if we have a huge grid. Here the idea is to sort the black squares lexiographically. Let this sorted list be $b_1,b_2,...,b_n$. We add $b_{n+1}=(w,h)$. Let the paths (ignoring black squares) from (1,1) to b_i be d_i . Let the paths respecting black squares be c_i . Our goal is to find c_{n+1} .

Also try defining a function paths :: (Int, Int) \rightarrow (Int, Int) \rightarrow Int which counts the paths from (x_1, y_1) to x_2, y_2 without any black squares. This function should give us d_i 's. Can we use these d_i and the paths function to get e_i 's?

X Mars Rover (Codeforces)

If you felt bad that I gave a hint in the last problem, here is a similar problem for you to do all on your own.

Research rover finally reached the surface of Mars and is ready to complete its mission. Unfortunately, due to the mistake in the navigation system design, the rover is located in the wrong place.

The rover will operate on the grid consisting of n rows and m columns. We will define as (r, c) the cell located in the row r and column c. From each cell the rover is able to move to any cell that share a side with the current one.

The rover is currently located at cell (1,1) and has to move to the cell (n,m). It will randomly follow some shortest path between these two cells. Each possible way is chosen equiprobably.

The cargo section of the rover contains the battery required to conduct the research. Initially, the battery charge is equal to *s* units of energy.

Some of the cells contain anomaly. Each time the rover gets to the cell with anomaly, the battery looses half of its charge rounded down. Formally, if the charge was equal to x before the rover gets to the cell with anomaly, the charge will change to $\lceil \left(\frac{x}{2} \right) \rceil$.

While the rover picks a random shortest path to proceed, write function charge :: (Int, Int) \rightarrow [(Int, Int)] \rightarrow Int \rightarrow Float to compute the expected value of the battery charge after it reaches cell (n,m), with the anomalies at some positions $[(x_1,y_1),(x_2,y_2),...,(x_n,y_n)]$ if we started with some c charge.

Note: If the cells (1,1) and (n,m) contain anomaly, they also affect the charge of the battery.

Examples

```
charge (3,3) [(2,1),(2,3)] 11 = 6.33333333333
```

X Vegetables (ZCO 2024)

You are a farmer, and you want to grow a wide variety of vegetables so that the people in your town can eat a balanced diet.

In order to remain healthy, a person must eat a diet that contains N essential vegetables, numbered from 1 to N. In total, your town requires A_i units of each vegetable i, for $1 \leq i \leq N$. In order to grow a single unit of vegetable i, you require B_i units of water.

However, you can use upgrades to improve the efficiency of your farm. In a single upgrade, you can do one of the following two actions:

- 1. You can improve the nutritional value of your produce so that your town requires one less unit of some vegetable i. Specifically, you can choose any one vegetable i such that $A_i \geq 1$, and reduce A_i by 1.
- 2. You can improve the quality of your soil so that growing one unit of some vegetable i requires one less unit of water. Specifically, you can choose any one vegetable i such that $B_i \geq 1$, and reduce B_i by 1.

If you use at most X upgrades, what is the minimum possible number of units of water you will need to feed your town? Write a function water $:: [Int] \to [Int] \to Int \to Int$ to answer this where the first list is A, second is B and the integer is X.

x de Polignac Numbers (Rosetta Code)

Alphonse de Polignac, a French mathematician in the 1800s, conjectured that every positive odd integer could be formed from the sum of a power of 2 and a prime number.

He was subsequently proved incorrect.

The numbers that fail this condition are now known as de Polignac numbers.

Technically 1 is a de Polignac number, as there is no prime and power of 2 that sum to 1. De Polignac was aware but thought that 1 was a special case. However, 127 is also fails that condition, as there is no prime and power of 2 that sum to 127.

As it turns out, de Polignac numbers are not uncommon, in fact, there are an infinite number of them.

- Find and display the first fifty de Polignac numbers.
- Find and display the one thousandth de Polignac number.
- Find and display the ten thousandth de Polignac number.

X Bifid cipher

The Bifid cipher is a polygraphic substitution cipher which was invented by Félix Delastelle in around 1901. It uses a 5 x 5 Polybius square combined with transposition and fractionation to encrypt a message. Any 5 x 5 Polybius square can be used but, as it only has 25 cells and there are 26 letters of the (English) alphabet, one cell needs to represent two letters - I and J being a common choice.

Operation Suppose we want to encrypt the message "ATTACKATDAWN".

We use this archetypal Polybius square where I and J share the same position.

```
x/y 1 2 3 4 5
--
--
1 | A B C D E
2 | F G H I K
3 | L M N O P
4 | Q R S T U
5 | V W X Y Z
```

The message is first converted to its x, y coordinates, but they are written vertically beneath.

```
A T T A C K A T D A W N
1 4 4 1 1 2 1 4 1 1 5 3
1 4 4 1 3 5 1 4 4 1 2 3
```

They are then arranged in a row.

```
1 4 4 1 1 2 1 4 1 1 5 3 1 4 4 1 3 5 1 4 4 1 2 3
```

Finally, they are divided up into pairs which are used to look up the encrypted letters in the square.

```
14 41 12 14 11 53 14 41 35 14 41 23
D Q B D A X D Q P D Q H
```

The encrypted message is therefore "DQBDAXDQPDQH".

Decryption can be achieved by simply reversing these steps.

Write functions in haskell to encrypt and descrypt a message using the Bifid cipher.

Use them to verify (including subsequent decryption):

- The above example.
- The example in the Wikipedia article using the message and Polybius square therein.
- The above example but using the Polybius square in the Wikipedia article to illustrate that it doesn't matter which square you use as long, of course, as the same one is used for both encryption and decryption.

In addition, encrypt and decrypt the message "The invasion will start on the first of January" using any Polybius square you like. Convert the message to upper case and ignore spaces.

X Colorful Numbers (Rosetta Code)

A colorful number is a non-negative base 10 integer where the product of every sub group of consecutive digits is unique.

For example: 24753 is a colorful number. $2,4,7,5,3,(2\times4)8,(4\times7)28,(7\times5)35,(5\times3)15,(2\times4\times7)56,(4\times7\times5)140,(7\times5\times3)105,(2\times4\times7\times5)280,(4\times7\times5\times3)420,(2\times4\times7\times5\times3)840$

Every product is unique.

2346 is not a colorful number. 2, 3, 4, 6, $(2 \times 3)6$, $(3 \times 4)12$, $(4 \times 6)24$, $(2 \times 3 \times 4)48$, $(3 \times 4 \times 6)72$, $(2 \times 3 \times 4 \times 6)144$

The product 6 is repeated.

Single digit numbers are considered to be colorful. A colorful number larger than 9 cannot contain a repeated digit, the digit 0 or the digit 1. As a consequence, there is a firm upper limit for colorful numbers; no colorful number can have more than 8 digits.

- Write a function to test if a number is a colorful number or not.
- Use that function to find all of the colorful numbers less than 100.
- Use that function to find the largest possible colorful number.
- Find and display the count of colorful numbers in each order of magnitude.
- Find and show the total count of all colorful numbers.


X Data Transfer Protocol on IOI? Parrots (IOI 2011, P6)

Yanee is a bird enthusiast. Since reading about IP over Avian Carriers (IPoAC), she has spent much of her time training a flock of intelligent parrots to carry messages over long distances.

Yanee's dream is to use her birds to send a message M to a land far far away. Her message M is asequence of N (not necessarily distinct) integers, each between 0 and 255, inclusive. Yanee keeps some K specially-trained parrots. All the parrots look the same; Yanee cannot tell them apart. Each bird can remember a single integer between 0 and R, inclusive.

Early on, she tried a simple scheme: to send a message, Yanee carefully let the birds out of the cage one by one. Before each bird soared into the air, she taught it a number from the message sequence in order. Unfortunately, this scheme did not work. Eventually, all the birds did arrive at the destination, but they did not necessarily arrive in the order in which they left. With this scheme, Yanee could recover all the numbers she sent, but she was unable to put them into the right order.

To realize her dream, Yanee will need a better scheme, and for that she needs your help.

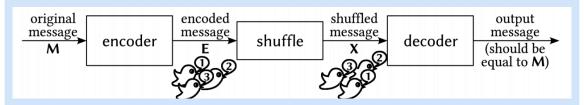

- Try to design a function that receives the Original Message (of some length N with numbers between 0-255) and encode the original messages to another message sequence, it's called Encoded Message with limit the size of message must not exceed K and using numbers from 0-R.
- The encoded message from will be shuffled.
- Receive the Shuffled Message and Decode back to Original Message.

You must implement the encode :: [Int] \rightarrow [Int] and decode :: [Int] \rightarrow [Int] process with you own method. We suggest the following roadmap,

Subtask 1 : N=8, all elements of the original message are either 0 or 1, $R=2^{16}-1$, K=10*N=80.

Subtask 2:1 < N < 16, $R = 2^{16} - 1$, K = 10 * N

Subtask 3: $1 \le N \le 16$, R = 255, K = 10 * N

Subtask 4: $1 \le N \le 32$, R = 255, K = 10 * N

Subtask 4: $1 \le N \le 32$, R = 255, K = 10 * N

Subtask 5: We now want you to try to reduce the ratio between encoded message length and original message length upto

$$1 \le N \le 64$$

. The mathematical limit for the best ratio one can get is slightly above $\frac{261}{64}\approx 4.08$ (Derive the limit!). Anything below 7 is very good, although we (the authours) are very intrested if someone can find the optimal solution.

Note: When the problem came in IOI, no one found the optimal solution. Furthermore, most solutions which got 100, did so they were optimal on the test cases and not in the general case.

X Broken Device (JOI 2016, Spring Training Camp)

Anna wants to send a 60-bit integer to Bruno. She has a device that can send a sequence of 150 numbers that are either 0 or 1. The twist is that L ($0 \le L \le 40$) of the positions of the device are broken and can only send 0. Bruno receives the sequence Anna sent, but the does not know the broken positions.

Anna knows the broken positions but Bruno doesn't. Write functions encode :: Int \rightarrow [Int] \rightarrow [Int] which given the integer and the broken position encodes the message and function decode :: [Int] \rightarrow Int which decodes the message and recovers the integer sent.

Subtask 1: K = 0, This should be very simple as you are just converting to binery.

Subtask 2: K = 1, We will have one broken position. If we can somehow indicate the start of out 60 bit sequence, can we find a continous 61 bit sequence?

Subtask 3: K = 15, This is where one needs to be creative. Note $\frac{150}{2} = 75$ and 75 - 15 = 60. Can you think of something now?

Subtask 4: K=40, The last question had 2, now try with 3 but have some sequences encode more than 1 bit.

X Coins (IOI 2017 Practice)

You have a number C ($0 \le C < 63$) and an line of 64 coins that are either heads or tails.

As an secret agent, you want to communicate your number to your handler by flipping some of the coins. To avoid being caught, you want to use as few flips as needed. To make the handler aware that you are communicating, you wish to flip atleast one coin. (The handler doesn't know the initial sequence of coins).

In the encoding part, you may flip at least one coins and at most *K* coins of the line.

In the decoding part, you receive the coins already with the changes, in a line, and you must recover the number ${\cal C}$.

Write functions encode :: Int \rightarrow [Bool] \rightarrow [Bool] which takes a number and a list of coins (True is heads and False is tails) and returns a list of bools with atleast 1 and atmost K of them flipped. Write a function decode :: [Bool] \rightarrow Int to recover the number.

Subtask 1: K = 64, This is easy.

Subtask 2: K = 6, Using our friend binery.

Subtask 3: K=1, Note that bitwise Xor $\hat{}$ has some very useful properties. One of these is the fact that it is extreamly easy to change and second is that for numbers between 1-64, taking bitwise xor of some set of numbers will result in a number between 0-63. How can we abuse it?

X Holes (Singapore 2007)

A group of scientists want to monitor a huge forest. They plan to airdrop small sensors to the forest. Due to many unpredictable conditions during airdropping, each sensor will land in a random location in the forest. After all sensors have landed, there will be square regions in the forest that do not contain any sensor. Let us call such a region a hole. It is desirable that all holes are small. This can be achieved by airdropping very large number of sensors. On the other hand, those sensors are expensive. Hence, the scientists want to conduct a computer simulation to determine how many sensors should be airdropped, so that the chances of having a large hole are small.

To conduct this simulation, a function hole :: $[Bool] \rightarrow Int$ is required that, given if a grid of booleans reprasenting the presence of the sensors, outputs the size of the largest hole. This function has to be very efficient since the simulation will be repeated many times with different parameters. You are tasked to write this function.

Example: We will use a matrix of one's and zero's to reprasent the input for convenience.

as we have a 5×5 grid of 0's, made bold.

X Restorers and Destroyers (Codeforces)

You have to restore a temple in Greece. While the roof is long gone, their are N pillars of marble slabs stil standing, the height of the i-th pillar is initially equal to h_i , the height is measured in number of marble slabs. After the restoration all the N pillars should have equal heights.

You are allowed the following operations:

- put a new slab on top of one pillar, the cost of this operation is *A*;
- remove a slab from the top of one non-empty pillar, the cost of this operation is *R*;
- move a slab from the top of one non-empty pillar to the top of another pillar, the cost of this operation is M.

As the name of the temple is based on the number of pillers, you cannot create additional pillars or ignore some of pre-existing pillars even if their height becomes 0.

What is the minimal total cost of restoration, in other words, what is the minimal total cost to make all the pillars of equal height?

Write a function $cost :: Int \rightarrow Int \rightarrow Int \rightarrow [Int] \rightarrow Int$ which takes the costs A, R and M; and the list of height of pillers and returns the cost of restoration.

Examples

```
cost 1 100 100 [1,3,8] = 12

cost 100 1 100 [1,3,8] = 9

cost 1 2 4 [5,5,3,6,5] = 4

cost 1 2 2 [5,5,3,6,5] = 3
```

X Numerical Diffrentiation

Using the techniques decribed in numerical integration, create a numerical Diffrentiation function.

You will need to write the following functions. You will be able to reuse some of the definitions from Numerical integration.

```
easyDiff :: (Float \rightarrow Float) \rightarrow Float \rightarrow Float \rightarrow Float diffrentiate :: (Float \rightarrow Float) \rightarrow Float \rightarrow Float \rightarrow Float] elimerror :: Int \rightarrow [Float] \rightarrow [Float] order :: [Float] \rightarrow Int improve :: [Float] \rightarrow [Float] super :: [Float] \rightarrow [Float] within :: Float \rightarrow [Float] \rightarrow Float ans :: (Float \rightarrow Float) \rightarrow Float \rightarrow Float \rightarrow Float
```

X Cutting Grass

After attempting to program in Grass for the entire morning, you decide to go outside and mow some real grass. The grass can be viewed as a string consisting exclusively of the following characters: www . w denotes tall grass which takes 1 unit of energy to mow. W denotes extremely tall grass which takes 2 units of energy to mow. Lastly v denotes short grass which does not need to be mowed.

You decide to mow the grass from left to right (beginning to the end of the string). However, every time you encouter a v (short grass), you stop to take a break to replenish your energy, before carrying on with the mowing. Your task is to calculate the maximum amount of energy expended while mowing. In other words, write a function energy $:: String \rightarrow Int$ to find the maximum total energy of mowing a patch of grass, that of which does not contain v.

Examples

X Hacking Cyper (Codeforces)

Polycarpus participates in a competition for hacking into a new secure messenger. He's almost won.

Having carefully studied the interaction protocol, Polycarpus came to the conclusion that the secret key can be obtained if he properly cuts the public key of the application into two parts. The public key is a long integer which may consist of even a million digits!

Polycarpus needs to find such a way to cut the public key into two nonempty parts, that the first (left) part is divisible by a as a separate number, and the second (right) part is divisible by b as a separate number. Both parts should be positive integers that have no leading zeros. Polycarpus knows values a and b.

Write

```
function crack :: Integer \rightarrow Integer \rightarrow Integer \rightarrow Maybe (Integer, Integer) to help Polycarpus and find any suitable method to cut the public key, given the key, a and b; if possible.
```

Examples

```
crack 116401024 97 1024 = Just (11640, 1024)
crack 284254589153928171911281811000 1009 1000 = Just (2842545891539,
28171911281811000)
crack 120 12 1 = Nothing
```

Mohak has explictly approved this (Codeforces 1874D)

There are n+1 cities with numbers from 0 to n, connected by n roads. The i-th road connects city i-1 and city i bi-directionally.

After Mohak flew back to city 0, he found out that he had left her Miku fufu in city $\frac{n}{n}$.

Each road has a positive integer level of beauty. Denote the beauty of the i-th road as a_i.

Mohak is trying to find his fufu. As all Miku fans are obsessive indoor creatues and have no sense of direction and are basically useless without Miku fufu for encouragement, he doesn't know which way to go. Every day, he randomly chooses a road connected to the city she currently is in and traverses it.

Let s be the sum of the beauty of the roads connected to the current city. For each road connected to the current city, Mohak will traverse the road with a probability of x/s, where x is the beauty of the road, reaching the city on the other side of the road.

Mohak starts in cuty 0 and Fufu is in city n.

In order to help Mohak, you want to choose the beauty of the roads such that the expected number of days Mohak takes to find his fufu will be the minimum possible. However, due to limited funding, the sum of beauties of all roads must be less than or equal to m.

Write a function $miku :: Int \to Int \to Float$ which takes the value of m and n and tells us the expected time for Mohak to find his fufu.

Examples

```
miku 3 8 = 5.2
miku 10 98 = 37.721155173329
```

Note In the first example, the optimal assignment of beauty is a=[1,2,5]. The expected number of days Mohak needs to get his fufu back is 5.2.

Hint: Let's say you are given the beauty list a. Now, how will you compute the expected number of days? Consider f(i) to be expected number of days to reach the i-th city. Can you find these recursively? What about g(i) = f(i) - f(i-1)? Can you find a form in terms of a, can you use zipWith to compute these?

Now, can you make a function to make lists that sum up to m and are of length n? You can save a lot of time by imposing one condition on the lists. The idea is that we want to keep moving forward.