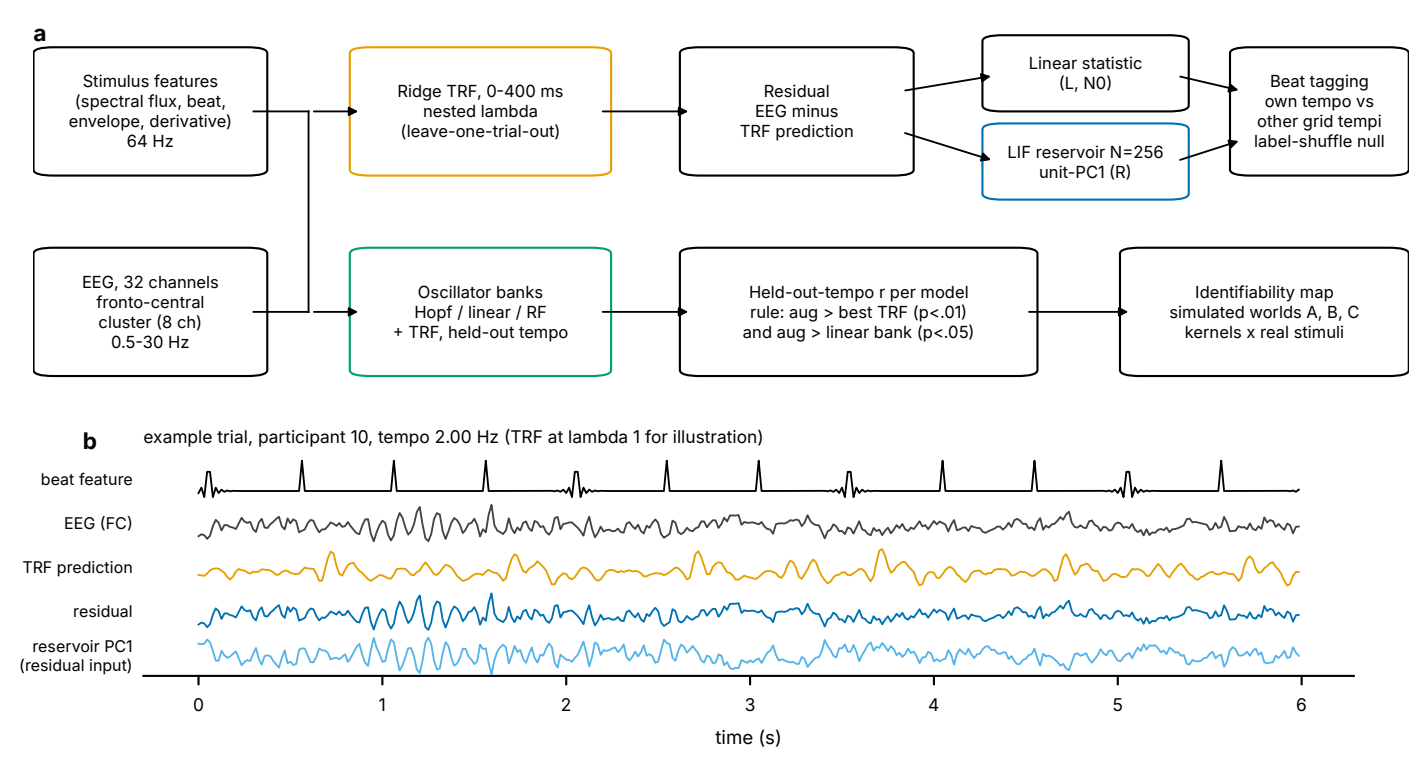
a
Stimulus features
(spectral flux, beat,
envelope, derivative)
64 Hz
Ridge TRF, 0-400 ms
nested lambda
(leave-one-trial-out)
Residual
EEG minus
TRF prediction
Linear statistic
(L, N0)
LIF reservoir N=256
unit-PC1 (R)
Beat tagging
own tempo vs
other grid tempi
label-shuffle null
EEG, 32 channels
fronto-central
cluster (8 ch)
0.5-30 Hz
Oscillator banks
Hopf / linear / RF
+ TRF, held-out tempo
Held-out-tempo r per model
rule: aug > best TRF (p<.01)
and aug > linear bank (p<.05)
Identifiability map
simulated worlds A, B, C
kernels x real stimuli
b
example trial, participant 10, tempo 2.00 Hz (TRF at lambda 1 for illustration)
beat feature
EEG (FC)
TRF prediction
residual
reservoir PC1
(residual input)
0
1
2
3
4
5
6
time (s)