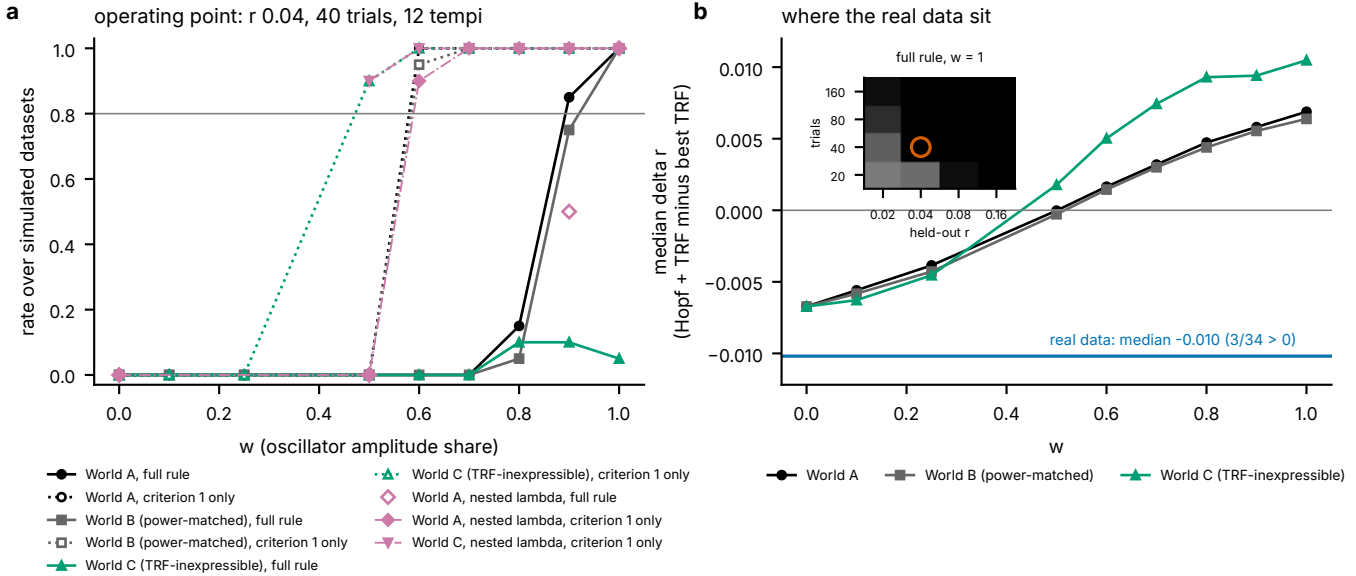
a
operating point: r 0.04, 40 trials, 12 tempi
rate over simulated datasets
1.0
0.8
0.6
0.4
0.2
0.0
0.0
0.2
0.4
0.6
0.8
1.0
w (oscillator amplitude share)
World A, full rule
World A, criterion 1 only
World B (power-matched), full rule
World B (power-matched), criterion 1 only
World C (TRF-inexpressible), full rule
World C (TRF-inexpressible), criterion 1 only
World A, nested lambda, full rule
World A, nested lambda, criterion 1 only
World C, nested lambda, criterion 1 only
b
where the real data sit
median delta r
(Hopf + TRF minus best TRF)
0.010
0.005
0.000
−0.005
−0.010
full rule, w = 1
trials
160
80
40
20
0.02
0.04
0.08
0.16
held-out r
real data: median -0.010 (3/34 > 0)
0.0
0.2
0.4
0.6
0.8
1.0
w
World A
World B (power-matched)
World C (TRF-inexpressible)