

# Subprograms

Programming Languages

CS 214



# Categorizing Functions

Recall: The *function* set constructor:  $f(D) \rightarrow R$   
can be used to describe the operations in a language.

This approach categorizes functions \_\_\_\_\_  
\_\_\_\_\_.

Example: C++ lets us use function notation to *cast*...

```
int( real )  $\rightarrow$  int
```

```
double( int )  $\rightarrow$  real
```

But if we write a *round()* function:

```
int round( double value ) { return int( value + 0.5 ); }
```

then *round()* is also a member of: \_\_\_\_\_

and *int()* and *round()* obviously *behave* very differently...



# Functions: as *Mapping Rules*

The function constructor defines a function's \_\_\_\_\_  
(i.e., it's domain- and range-sets), but not its \_\_\_\_\_  
(i.e., indicate the domain-to-range element mappings).

Behavior can be defined via a *domain-to-range mapping rule*:

Example: In C++, we can *specify* that:  $abs(int) \rightarrow int$   
but to define the *behavior* of  $abs()$ , we need a rule:

$$abs(v) = \left\{ \begin{array}{l} \text{_____} \\ \text{_____} \end{array} \right.$$

A *mapping rule* must specify the range-value for each domain-value for which the function is defined.



# Functions: as *Algorithms*

An alternative way to specify behavior is to specify:

- the function's \_\_\_\_\_
- the function's \_\_\_\_\_
- a \_\_\_\_\_ for computing the result, using the parameters.

```
-- Ada
function abs(val: in float)
    return float is
begin
    if val >= 0.0 then
        return val;
    else
        return -val;
    end if;
end abs;
```

```
"Lisp"
(defun abs (val)
  (if (>= val 0)
      val
      (- 0 val) ))
```

```
"Smalltalk (Number method)"
abs
    self >= 0
    ifTrue: ^self
    ifFalse: ^(0 - self).
```

Some like to view a HLL as a \_\_\_\_\_.



# Functions and Operators

Most *functions* can be defined as *operators*, and vice versa.

Example: Ada provides an exponentiation operator \_\_\_\_\_  
where C++ provides an exponentiation function \_\_\_\_\_.

So a 3rd-order polynomial can be expressed in C++ as

```
y = a * pow(x, 3) + b * pow(x, 2) + c * x + d;
```

or in Ada as:

```
y = a * x ** 3 + b * x ** 2 + c * x + d;
```

Superficially, functions and operators are *equivalent*:

- The \_\_\_\_\_ of a function  $\equiv$  the \_\_\_\_\_ of an operator.
- A *function* can be thought of as a \_\_\_\_\_.



# Functions: as *Abstractions*

Others prefer to view functions as an *abstraction mechanism*:

- the ability to \_\_\_\_\_...

Example: If a library provides a *summation()* function, it might use any of these algorithms:

```
// iterative algorithm
int summation(int n) {
    int result = 1;
    for (int i = 2; i <= n; i++)
        result += i;
    return result;
}
```

```
// recursive algorithm
int summation(int n) {
    if (n >= 2)
        return n + summation(n-1);
    else
        return 1;
}
```

```
// using Gauss' formula
int summation(int n) {
    return n * (n+1) / 2;
}
```

The name *summation()* is an *abstraction* that hides the details of the particular algorithm it uses.



# Functions: as *Subprograms*

Imperative HLLs divide functions into two categories:

- \_\_\_\_\_: subprograms that map:  $(P_1 \times P_2 \times \dots \times P_n) \rightarrow \emptyset$
- \_\_\_\_\_: subprograms that map:  $(P_1 \times P_2 \times \dots \times P_n) \rightarrow R \neq \emptyset$

There are no standard names for these categories:

HLL	$(D) \rightarrow \emptyset$	$(D) \rightarrow R$
C/C++	void function	function
Fortran	subroutine	function
Pascal	procedure	function
Modula-2	proper procedure	function procedure
Ada	procedure	function

We will describe subprograms mapping  $(D) \rightarrow R$  as *functions*,  
and describe subprograms mapping  $(D) \rightarrow \emptyset$  as *procedures*.



# Functions: as *Messages*

OO languages view functions as \_\_\_\_\_.

The *receiver* of a message executes its \_\_\_\_\_.

– The result is controlled by the \_\_\_\_\_, not the *sender*.

Different OO languages use different syntax for messages...

Example: To find the length of *anArray*, we send it a message:

```
// C++  
anArray->length()
```

```
// Java  
anArray.length
```

```
// Smalltalk  
anArray size
```

Example: To find the length of *aString*, we send it a message:

```
// C++  
aString->length()
```

```
// Java  
aString.length()
```

```
// Smalltalk  
aString size
```

Messages are something like \_\_\_\_\_...





# Subprogram Mechanisms

To have a subprogram mechanism, a language must provide:

- A means of \_\_\_\_\_ the subprogram (specifying its *behavior*);
- A means of \_\_\_\_\_ the subprogram (or *activating* it).

In programming languages, to *define* a thing is to:

- \_\_\_\_\_; and
- \_\_\_\_\_.

Example: This is a C++  
subprogram *definition*:  
because it:

```
int summation(int n) {  
    return n * (n+1) / 2;  
}
```

- (i) reserves storage (for the function's code); and
- (ii) binds the name *summation* to the first address in that storage.



# Definitions vs. Declarations

Where a *definition* binds a name to *storage*,  
a \_\_\_\_\_ binds a name to a \_\_\_\_\_.

Example: This is a  
C++ *declaration*:

```
int summation(int n);
```

because it tells the compiler this about *summation*:

\_\_\_\_\_

allowing the compiler to type-check calls to the function.

For a *variable*, declaration and definition are \_\_\_\_\_...

```
int result;
```

This statement reserves a word of memory, and  
binds the name *result* to the address of that word.

For *subprograms*, declaration and definition \_\_\_\_\_.



# C/C++ Function Pointers

Implication of a function *definition*:

a C/C++ function's name is a \_\_\_\_\_.

Example: If *summation* and *factorial* are two functions:

```
int summation(int n) { return n * (n+1) / 2; }  
int factorial(int n) { ... definition of factorial ... }
```

then we can *declare a pointer type*:

```
typedef int * fptr(int);
```

use it to *define a pointer array*:

```
fptr fTable[2];
```

*initialize our array*:

```
fTable[0] = summation;  
fTable[1] = factorial;
```

and then *call either function*:

```
cout << fTable[i] (n);
```

Classes use a similar table for \_\_\_\_\_.



# Subprogram Definitions

To allocate a subprogram's storage, 4 items are needed:

1. Its \_\_\_\_\_ (*data* storage for values sent by the caller);
2. Its \_\_\_\_\_ (*data* storage for the return value);
3. Its \_\_\_\_\_ (*data* storage for local variables); and
4. Its \_\_\_\_\_ or statements (*executable code* storage).

These are all provided by a subprogram's *definition*.

By contrast, a subprogram's *declaration* requires only:

1. Its \_\_\_\_\_ (i.e., its domain-set  $D$ ); and
2. Its \_\_\_\_\_ (i.e., its range-set  $R$ )

This \_\_\_\_\_:  $f(D) \rightarrow R$   
lets the compiler check *calls* to the function for correctness.



# Imperative Examples

Consider these imperative function definitions:

```
// C++  
void swap(int & a, int & b) {  
    int t = a; a = b; b = t;  
}
```

```
-- Ada  
procedure swap(a, b: in out integer) is  
    integer t;  
begin  
    t := a; a := b; b := t;  
end swap;
```

In each case, we have: \_\_\_\_\_

This allows the compiler to check that in calls: `swap(x, y);`  
the arguments *x* and *y* are compatible with the parameters.



# Subprograms: Lisp and Smalltalk

A Lisp subprogram definition uses the \_\_\_\_\_ function:

```
"Lisp"
(defun factorial (n)
  if (< n 2)
    1
    (* n (factorial (- n 1) )) )
```

When evaluated, *defun* parses the function that follows it and (assuming no errors) creates a symbol table entry for it.

A Smalltalk subprogram must be \_\_\_\_\_:

```
"Smalltalk Integer method"
factorial
| result |
result := 1.
2 to: self
  do: [:i | result:= result * i].
^result
```

On an *accept event*, Smalltalk parses the method and (assuming no errors) creates a symbol table entry for it.



# Calling Subprograms

In most languages, a subprogram is called by \_\_\_\_\_.

```
// C++  
swap(x, y);
```

```
-- Ada  
swap(x, y);
```

```
(* Modula-2 *)  
swap(x, y);
```

```
* Fortran  
CALL swap(x, y);
```

Fortran subroutines  
must be called with  
the *CALL* keyword.

Lisp functions must be called

(following an o-parenthesis):

```
"Lisp"  
(setq answer (factorial n) )
```

Smalltalk requires that a  
message be sent to an object:

```
"Smalltalk"  
answer := 5 factorial
```



# Issue: Parameterless Subprograms

Must parentheses be given at calls to parameterless functions?

- C/C++: \_\_\_\_\_

```
doSomething();
```

() is the *function-call operator*;  
jumps to address preceding it

- Modula-2: \_\_\_\_\_

```
doSomething;
```

() delimits arguments

- Lisp: \_\_\_\_\_

```
(doSomething)
```

() delimits function calls

- Ada: \_\_\_\_\_

```
doSomething;
```

() delimits arguments (syntax)

- Fortran: \_\_\_\_\_

```
CALL doSomething
```

() delimits arguments

- Smalltalk: \_\_\_\_\_

```
obj doSomething
```

*no method has 0 parameters...*






# Activations

An *activation* is \_\_\_\_\_, and involves 3 steps:

- Space for the subprogram's data values is allocated on a special *run-time stack*;
- The caller's arguments are associated with the subprogram's parameters;
- Control is transferred from the caller to the starting address of the subprogram.

On Unix systems, the run-time stack grows “downward”

The space for one subprogram's data is called a *stack frame*, or \_\_\_\_\_.

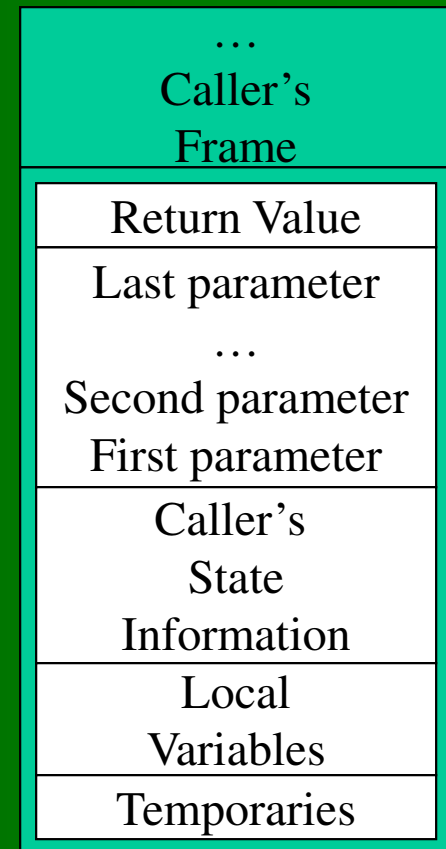

*run-time stack*



# Why a Stack?

Consider a *recursive* subprogram:

When called:  $sum(3)$

$sum(3)$  calls:  $sum(2)$

$sum(2)$  calls:  $sum(1)$

$sum(1)$  returns 1 to:  $sum(2)$

$sum(2)$  returns  $2+1$  to:  $sum(3)$


$sum(3)$  returns  $3+3$  to its caller.

The call-sequence uses \_\_\_\_\_  
behavior, so a *stack* is the appropriate data structure.

Each activation's parameters ( $n$ ) and locals must be kept distinct.

A stack is necessary in \_\_\_\_\_


```
// C++
int sum(n) {
    if (n > 1)
        return n + sum(n-1);
    else
        return 1;
}
```

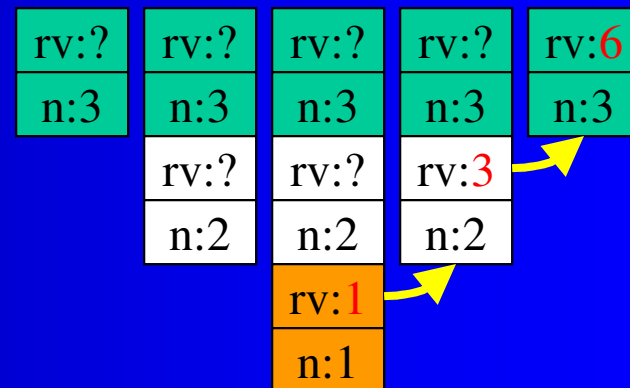

# Memory Layout

On Unix systems, a program's data space is laid out something like this:

- Space for *static/global variables*
- The *run-time stack* for locals, parameters, etc.
- The *heap* for dynamically allocated variables.

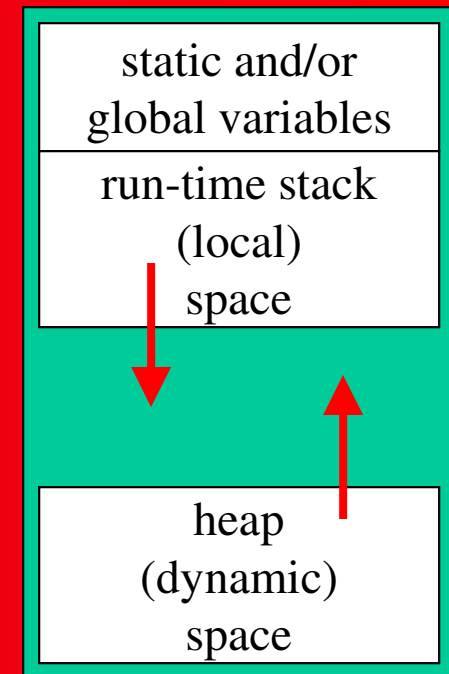

This flexible design uses memory efficiently:

A typical program only runs out of memory if

- its *stack overruns its heap* (\_\_\_\_\_), or
- its *heap overruns its stack* (\_\_\_\_\_).




# Parameter Passing

Parameters are allocated space \_\_\_\_\_  
\_\_\_\_\_ on the run-time stack.

Before control is transferred to the subprogram, the call's arguments are “associated with” these parameters.

Exactly how arguments get associated with parameters depends on the *parameter passing mechanism* being used.

There are *four* general mechanisms: \_\_\_\_\_

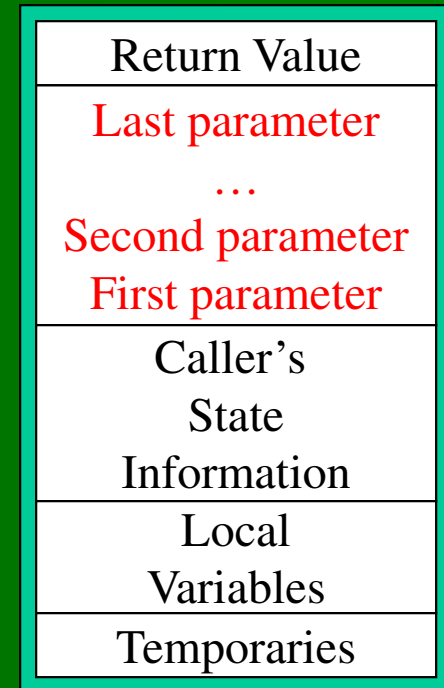

# Call-by-Value Parameters

- ... are value into which their arguments are *copied*. – Changing a parameter doesn't affect its argument's value.
- This is the *default* mechanism in most languages.
  - This is the *only* mechanism in C, Lisp, Java, Smalltalk, ...

**// C++**

```
int summ (int a, int b) {  
    return (a+b) * (b-a+1) / 2;  
}
```

**-- Ada**

```
function summ (a, b: in integer)  
    return integer is  
begin  
    return (a+b) * (b-a+1) / 2;  
end summ;
```

**"Lisp"**

```
(defun summ (a b)  
  (/ (* (+ a b) (+ (- b a) 1))  
     2) )
```

**"Smalltalk Integer method"**

```
summ: b  
    ^(self+b) * (b-self+1) / 2
```


In Ada, *in* is optional, but is considered good programming style.



# When function *summ()* is called

```
// C++  
total = summ(x, y);
```

- An activation record for *summ()* containing space for *a* and *b* is pushed onto the run-time stack.
- The arguments are evaluated and copied into their parameters.
- Control is transferred to *summ()* which executes and computes its return-value.
- *summ()*'s AR is popped, and control returns to the caller which retrieves the return-value from just “above” its stack-frame.

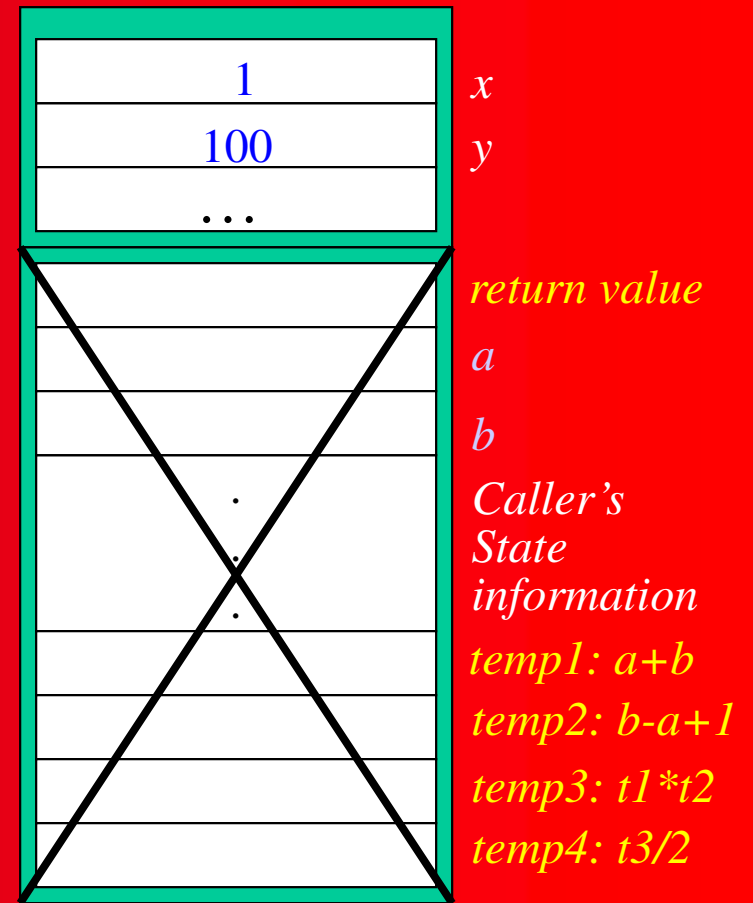

# Call-by-Reference Parameters

... are pointers storing *the addresses of their arguments*, that are auto-dereferenced whenever they are accessed.

- The parameter is an *alias* for the argument.
- Changing the parameter's value changes the argument's value.

```
// C++  
void swap (int& a, int& b) {  
    int t = a; a = b; b = t;  
}
```

```
-- Ada  
procedure swap (a, b: in out integer)  
is t: integer;  
begin  
    t := a; a := b; b := t;  
end swap;
```


Smalltalk and Lisp  
*implicitly* provide  
call-by-reference,  
because “variables”  
are actually pointers  
to dynamic objects.  
Java is complicated...



# When *swap()* is called

```
// C++  
swap(x, y);
```

- An activation record for *swap()* containing space for *a* and *b* is pushed onto the run-time stack.
- The *addresses* of the arguments are stored into their parameters.
- Control is transferred to *swap()* which executes, automatically dereferencing accesses to *a* and *b*.
- The RTS is popped, control returns to the caller, and the original values of *x* and *y* have been overwritten with new values.

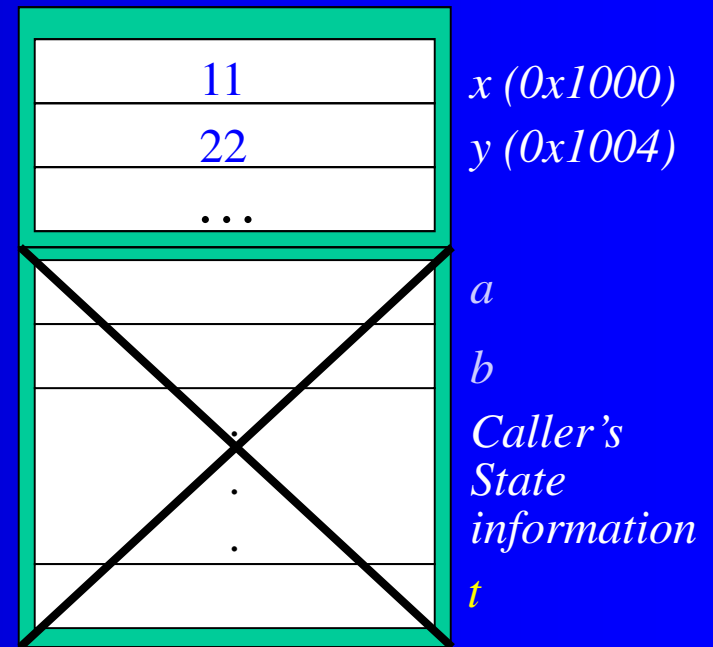



# Implementing Call-by-Reference?

Stroustrup's first C++ “compiler” just produced C code, so if C only provides the call-by-value mechanism, how can it handle the C++ call-by-reference mechanism?

```
// C++  
swap(x, y);
```

```
// C++  
void swap (int& a,  
           int& b);
```

```
// C++  
void swap (int& a,  
           int& b)  
{   int t = a;  
    a = b;  
    b = t;  
}
```

1. At the call, replace arguments with their *addresses*:

```
/* C */  
swap(&x, &y);
```

2. In the declaration and definition, replace reference parameters with *pointers*:

```
/* C */  
void swap (int* a,  
           int* b);
```

3. Within the function definition, *dereference* each access to the parameter

```
/* C */  
void swap (int* a,  
           int* b)  
{   int t = *a;  
    *a = *b;  
    *b = t;  
}
```

Any compiler can implement call-by-reference this way.



# Call-by-Copy-Restore Parameters

- ... store *both the value and the address of their arguments*.
  - Within the subprogram, parameter accesses use the local value
  - When the subprogram terminates, the local value is *copied back* into the corresponding argument.
  - More time-efficient than call-by-reference for *heavily-used parameters* (avoids slow pointer-dereferencing).
  - Ada's *in-out* parameters *may* use copy-restore...


```
procedure get (str: in out ubString; length in out integer) is
  ch: character;
begin
  length:= 0; str:= ""; get(ch);
  while not End_Of_Line loop
    str:= str + ch;
    length:= length + 1;
    get(ch);
  end get;
```



# When *get()* is called

```
-- Ada  
get (st, n);
```

- An activation record for *get()* containing space for the *data* and *address* of both *str* and *length* is pushed onto the run-time stack.
- Argument *values* and *addresses* are written to their parameters.
- Control is transferred to *get()* which executes, accessing only local values *str* and *length*.
- The original values of arguments *st* and *n* are overwritten with the values of parameters *str* and *length*, the RTS is popped, and control returns to the caller.

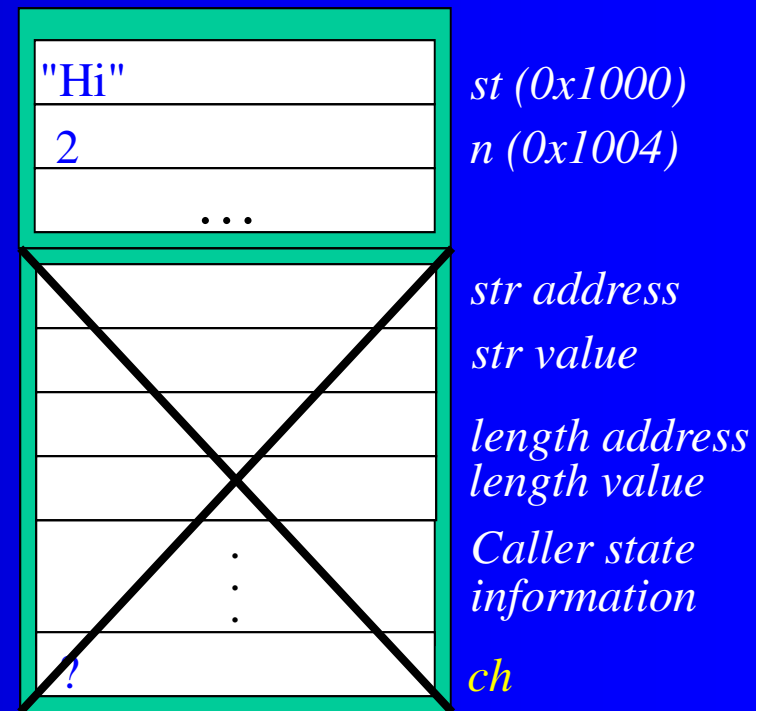

# Aliasing

Copy-restore parameters behave the same as reference parameters, so long as the parameter is not an *alias* for a non-local that is accessed within the same subprogram.

Example:

Suppose we  
have this  
subprogram:

```
procedure aliasExample (param: in out integer) is
begin
  param:= 1;
  a:= 2;
end get;
```

and we execute:

```
a:= 0;
aliasExample(a);
put(a);
```

What is output, if *param* uses:

- call-by-reference?
- call-by-value-restore?

To avoid this, Ada forbids aliasing.



# Call-by-Name Parameters

1. *Copy the body of the subprogram;*
2. *In the copy, substitute the arguments for the parameters;*
3. *Substitute the resulting copy for the call;*

The result is the *call-by-name mechanism* (aka \_\_\_\_\_).

```
/* C */  
#define SWAP (a, b) { int t = a; a = b; b = t; }
```

```
// C++  
inline void swap (int& a, int& b) { int t = a; a = b; b = t; }
```

- Call-by-name originated with *Algol-60*.
- By replacing the function-call with the altered body, call-by-name:
  - \_\_\_\_\_ by eliminating the call and the RTS overhead; but
  - \_\_\_\_\_ by increasing the size of the program.



# At each call to *swap()*

```
// C++ call to swap()  
swap(w, x);
```

```
// C++ call to swap()  
swap(y, z);
```

- The compiler makes a *copy* of the body of the function.

```
{ int t = a; a = b; b = t; }
```

```
{ int t = a; a = b; b = t; }
```

- In it, the compiler *substitutes arguments for parameters*.

```
{ int t = w; w = x; x = t; }
```

```
{ int t = y; y = z; z = t; }
```

- The compiler *substitutes the resulting body for the call*.

```
// C++ call to swap()  
{ int t = w; w = x; x = t; }
```

```
// C++ call to swap()  
{ int t = y; y = z; z = t; }
```

The resulting code is \_\_\_\_\_, but without the overhead of pushing a stack-frame, setting parameters, ... it runs \_\_\_\_\_.



# Macro-Substitution Anomaly

Suppose we have defined this C macro:

```
#define SWAP (a, b) { int t = a; a = b; b = t; }
```

*a* and *i* are as follows:

<i>i</i>	2	<i>a</i>	11	22	33	44	55
----------	---	----------	----	----	----	----	----

and we call:

*SWAP*(*i*, *a*[*i*]);

What we expect is:

<i>i</i>		<i>a</i>	11	22		44	55
----------	--	----------	----	----	--	----	----

but what we get is:

What happened? Our call:

*SWAP*(*i*, *a*[*i*]);

is replaced by:

{ *int* *t* = *i*; *i* = *a*[*i*]; *a*[*i*] = *t*; }

Tracing, we see:

*t*

--

*i*

--

*a*[*i*] → \_\_\_\_\_ → bus error

Because of such unexpected results, the use of macro-substitution (`#define`) for call-by-name is discouraged.



# What About *inline*?

Suppose we have defined this C++ *inline* function:

```
inline void swap (int& a, int& b) { int t = a; a = b; b = t; }
```

*a* and *i* are as follows:  
and we call:

<i>i</i>	2	<i>a</i>	11	22	33	44	55
----------	---	----------	----	----	----	----	----

`swap(i, a[i]);`

What we expect is:  
and we get:

<i>i</i>	33	<i>a</i>	11	22	2	44	55
----------	----	----------	----	----	---	----	----

<i>i</i>		<i>a</i>	11	22		44	55
----------	--	----------	----	----	--	----	----

What happened? Our call:  
is replaced by:

`swap(i, a[i]);`

```
{int* t1 = &i; int* t2 = &a[i];  
  int t = *t1; *t1 = *t2; *t2 = t;}
```

Since *a[i]* has a reference parameter, its address is computed  
and stored (in *t2*), and \_\_\_\_\_.

Call-by-name (via *inline*) is \_\_\_\_\_ in C++.





# Summary

There are two broad categories of subprograms:

- \_\_\_\_\_: that map:  $(P_1 \times P_2 \times \dots \times P_n) \rightarrow$  \_\_\_\_\_
- \_\_\_\_\_: that map:  $(P_1 \times P_2 \times \dots \times P_n) \rightarrow$  \_\_\_\_\_

When a subprogram is *called*, an \_\_\_\_\_ containing space for its variables is pushed onto the \_\_\_\_\_.

The four parameter-passing mechanisms are: Call-by-\_\_\_\_\_

- \_\_\_\_\_ stores a copy of the argument.
- \_\_\_\_\_ stores the address (reference) of the argument and auto-dereferences all accesses to the parameter.
- \_\_\_\_\_ stores a copy and the address of the argument, and replaces the argument's value with the copy's value on termination.
- \_\_\_\_\_ makes a copy of the function, replaces the parameter in the copy with the argument, and then replaces the call with that copy.

