
Klaudesk: agent architecture

SATS triage desk assistant · the agent scores and cites; a named clinician decides · all patient data synthetic

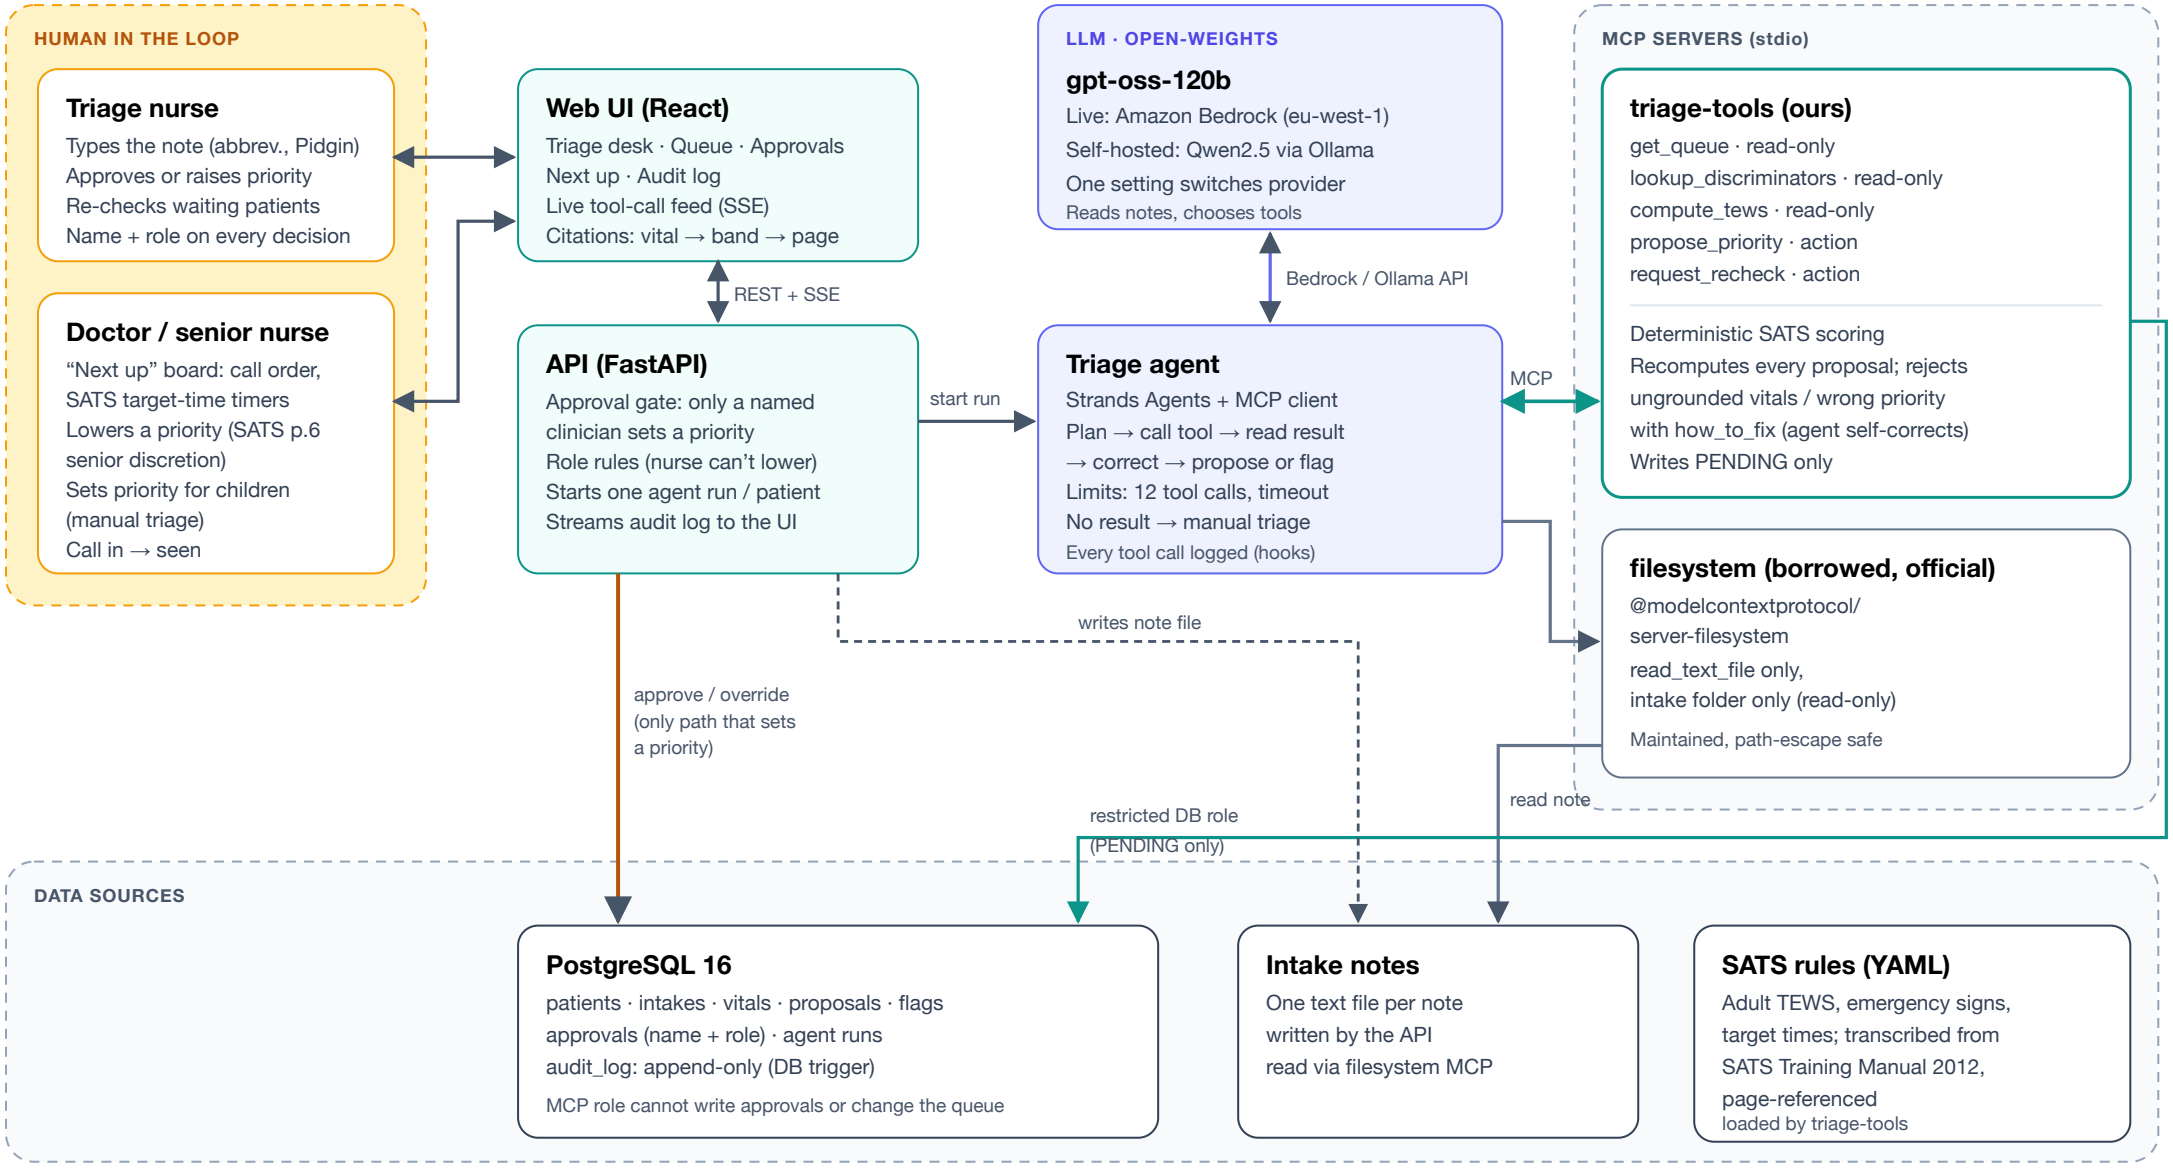

DATA FLOW

① Nurse types the note → API saves the patient, writes the note file, starts one agent run.
② Agent reads the note (filesystem MCP) → calls lookup_discriminators and compute_tews (triage-tools MCP).
③ Agent proposes → server recomputes, rejects anything unsupported → agent corrects.
④ Every tool call is audited and streamed live to the UI.
⑤ Nurse approves or raises (senior may lower) → only now does the queue change.
⑥ Doctor’s Next up → call in → seen; re-checks raise deterioration alerts.