


Inside a module

Menus makes the public entry, private implementation and shared values visible.

→ A → B means A imports B. Every arrow is a source dependency.

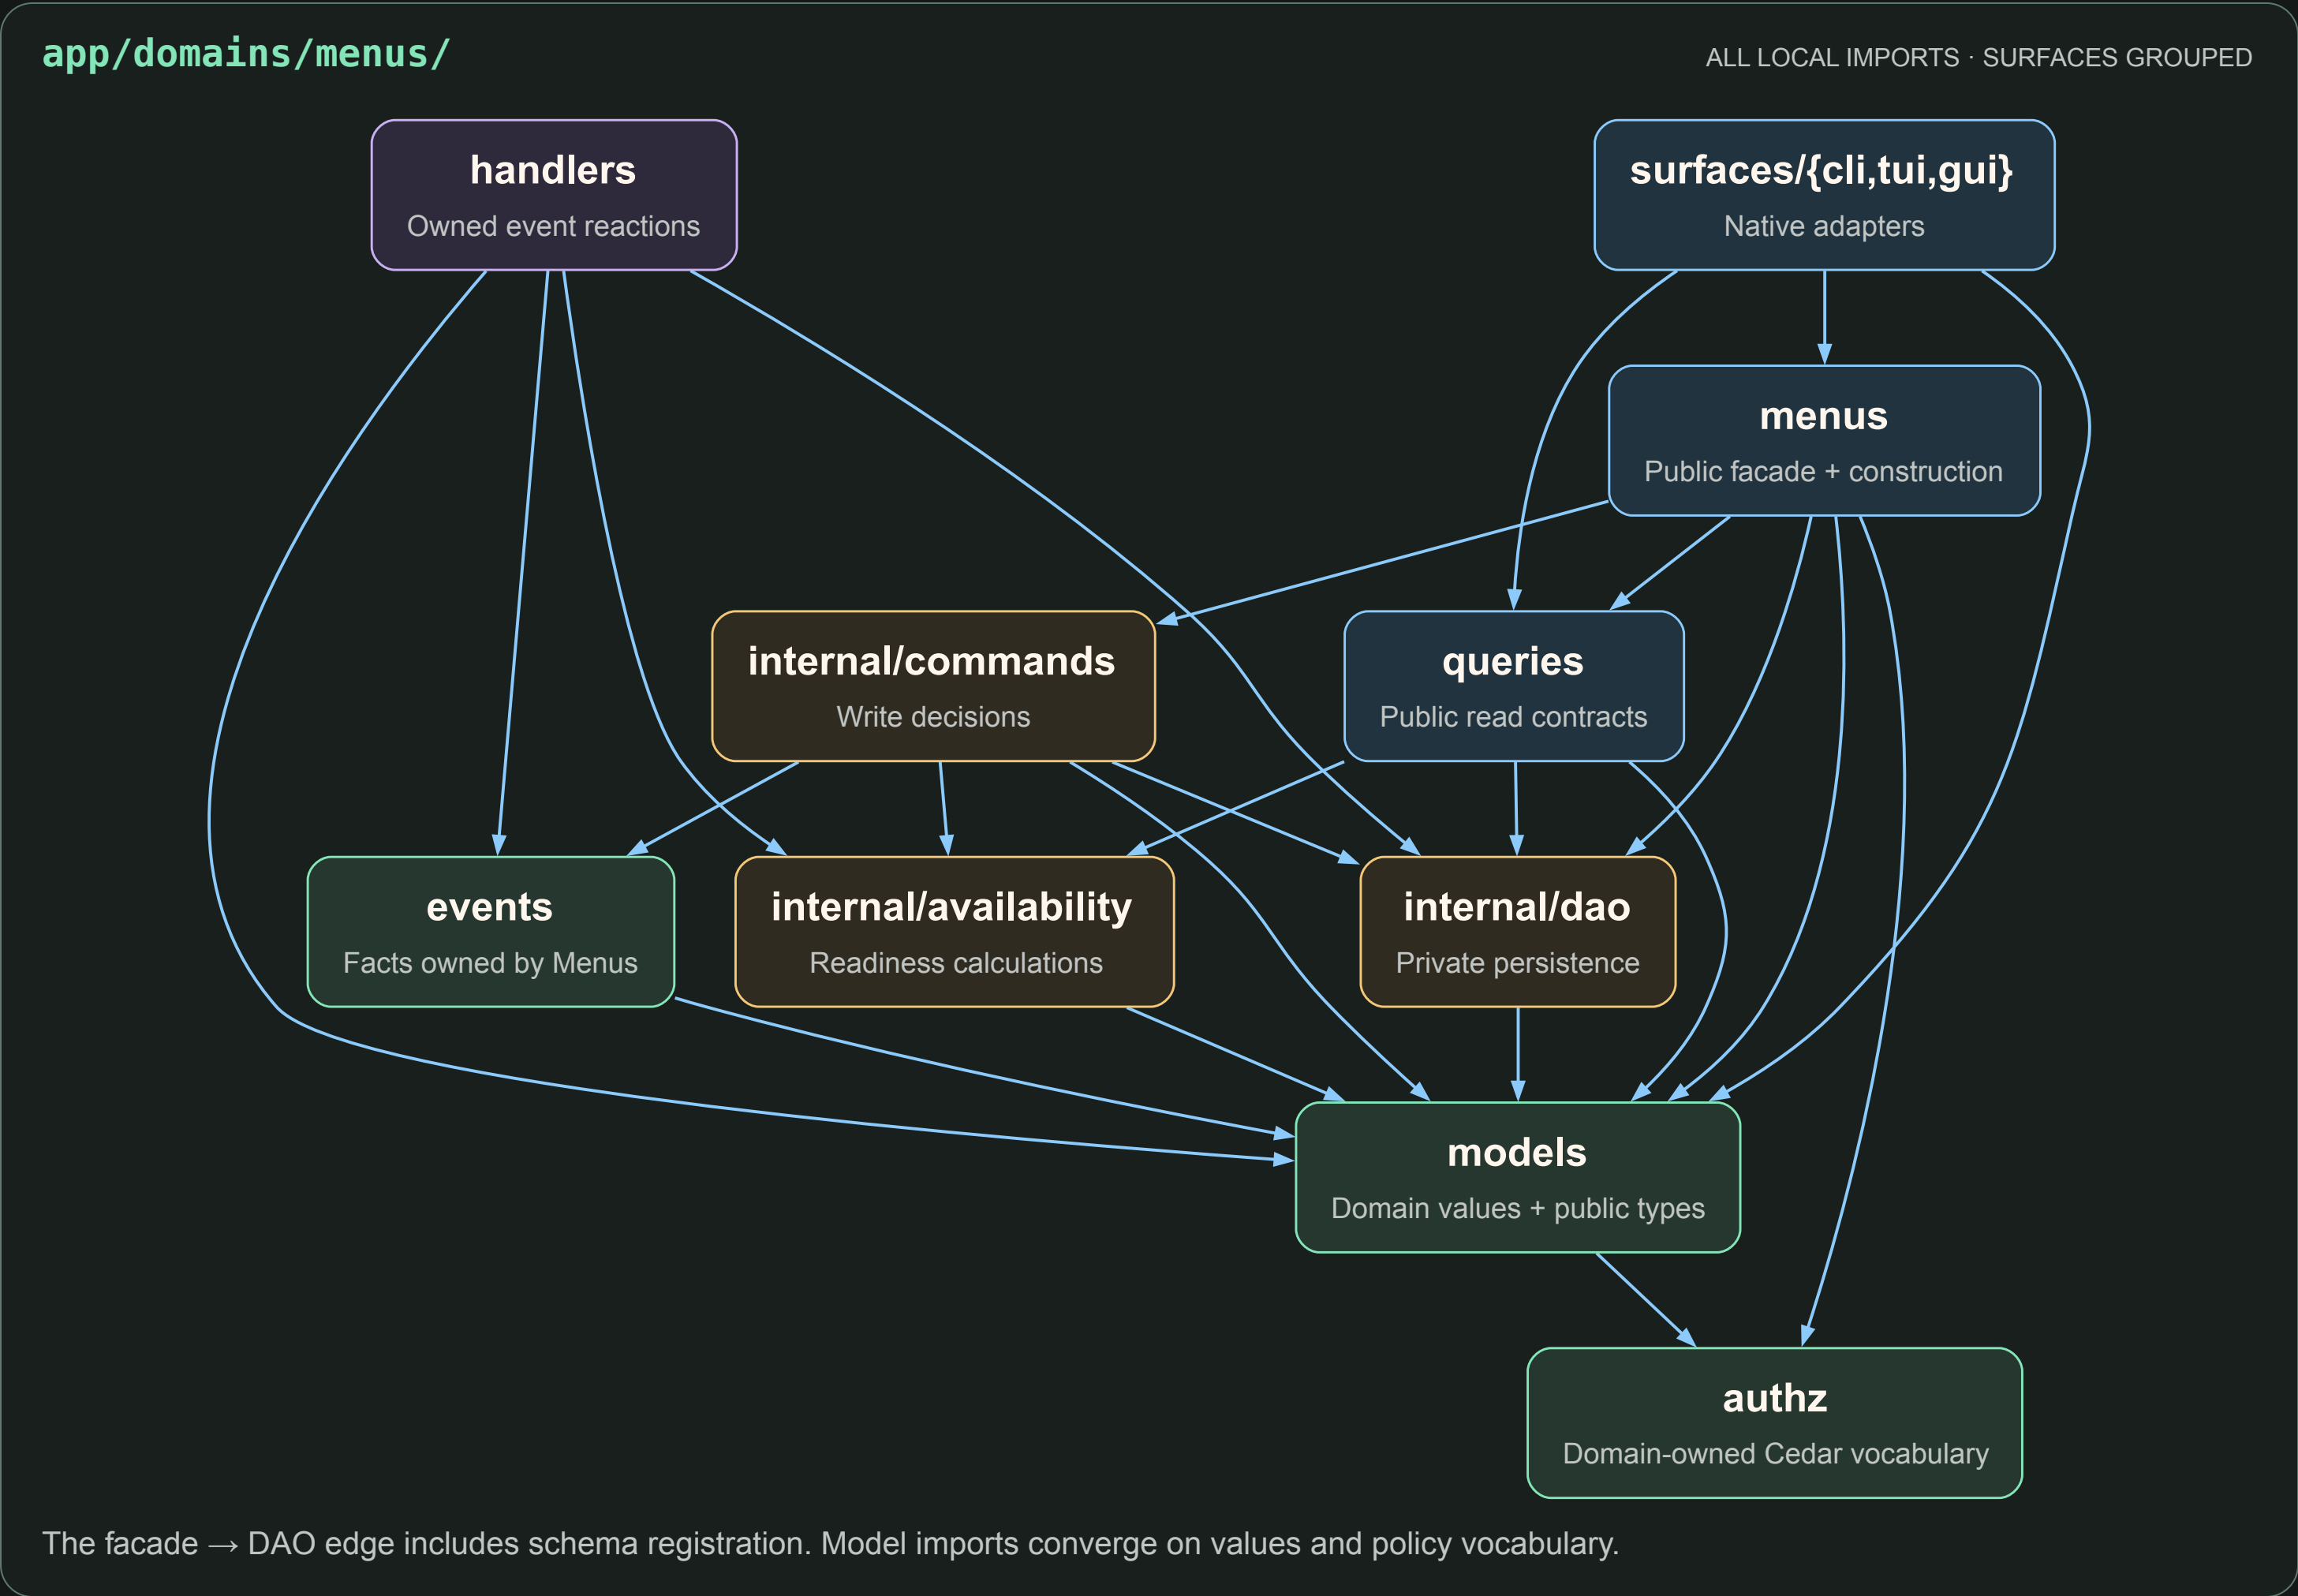

THE BOUNDARIES THE BUILD CHECKS

- Surfaces cannot import their own internal packages.
- Queries and handlers cannot import commands.
- Handlers cannot import domain facades.

DEPENDENCIES BEYOND THIS BOX

- Peer models, queries and events keep their owner.
- Surfaces use matching toolkits and public facades.
- Shared kernel, middleware and store support the module.

Go internal blocks peer access. arch-lint narrows access inside the owner's tree.

Observed imports are shown above; the rules also reject forbidden imports that have not been written.