





Take a screenshot of the diff between the different forks, to show what differences there are between the forks (which should be the documents you have added)

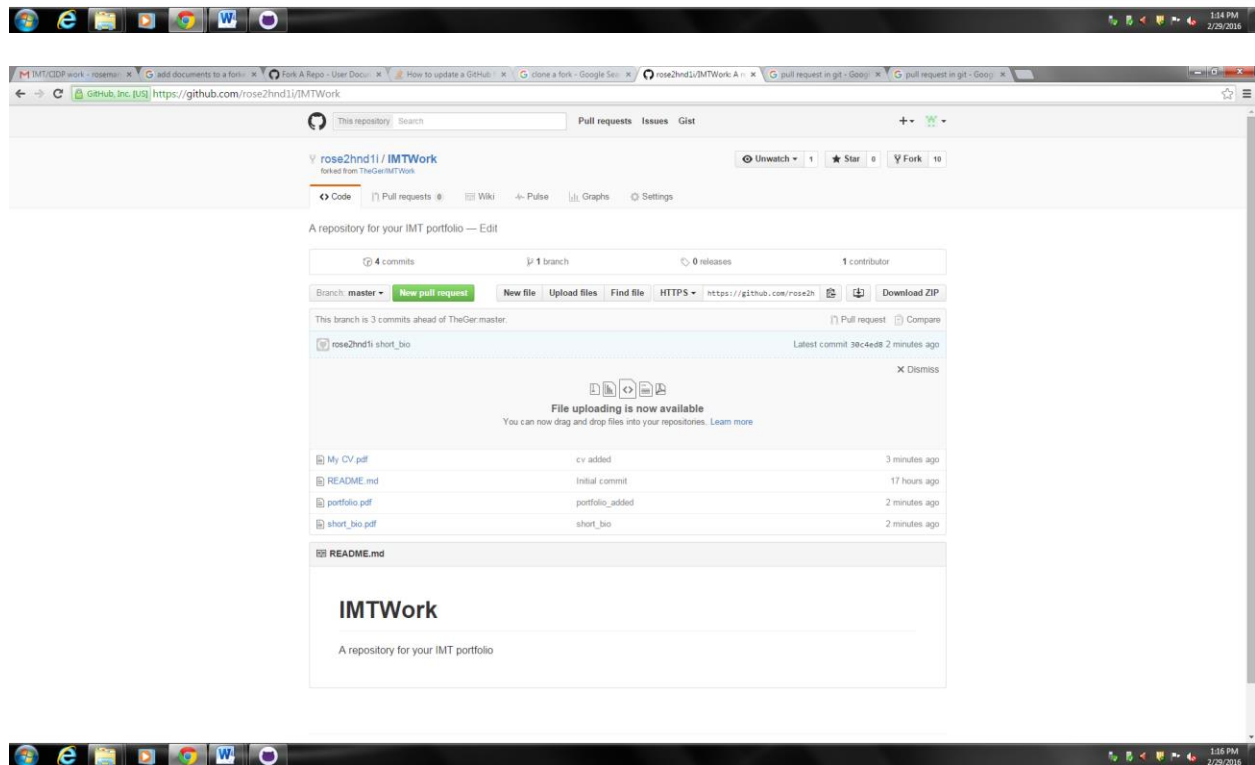

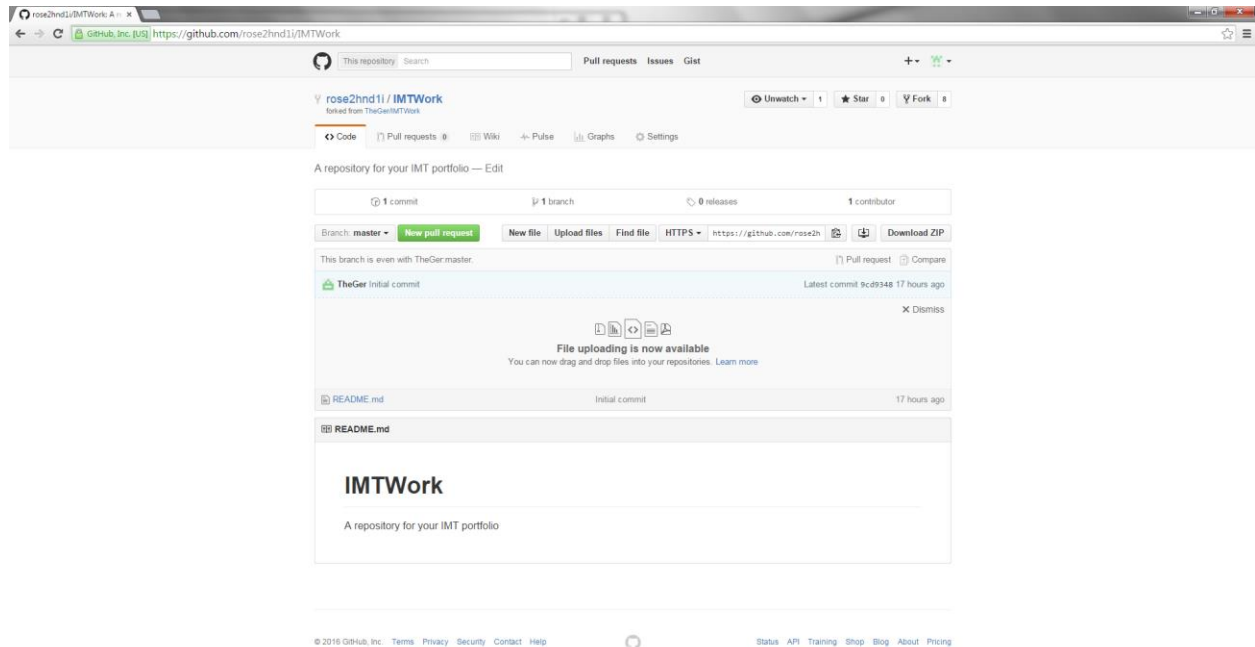

The screenshot shows a GitHub pull request page for the repository 'TheGer / IMTWork'. The pull request is titled 'Added files #7' and is in the 'Open' state. It shows three commits from the user 'rose2hnd1i' to the branch 'master'. The commits are: 'cv added' (12 minutes ago), 'portfolio\_added' (12 minutes ago), and 'short\_bio' (11 minutes ago). The pull request is ready for review, with a green checkmark indicating that all required checks are passing. The page also shows the repository's main page with tabs for Code, Issues, Pull requests, Wiki, Pulse, and Graphs. The pull request is currently at the 'Pull requests' tab.

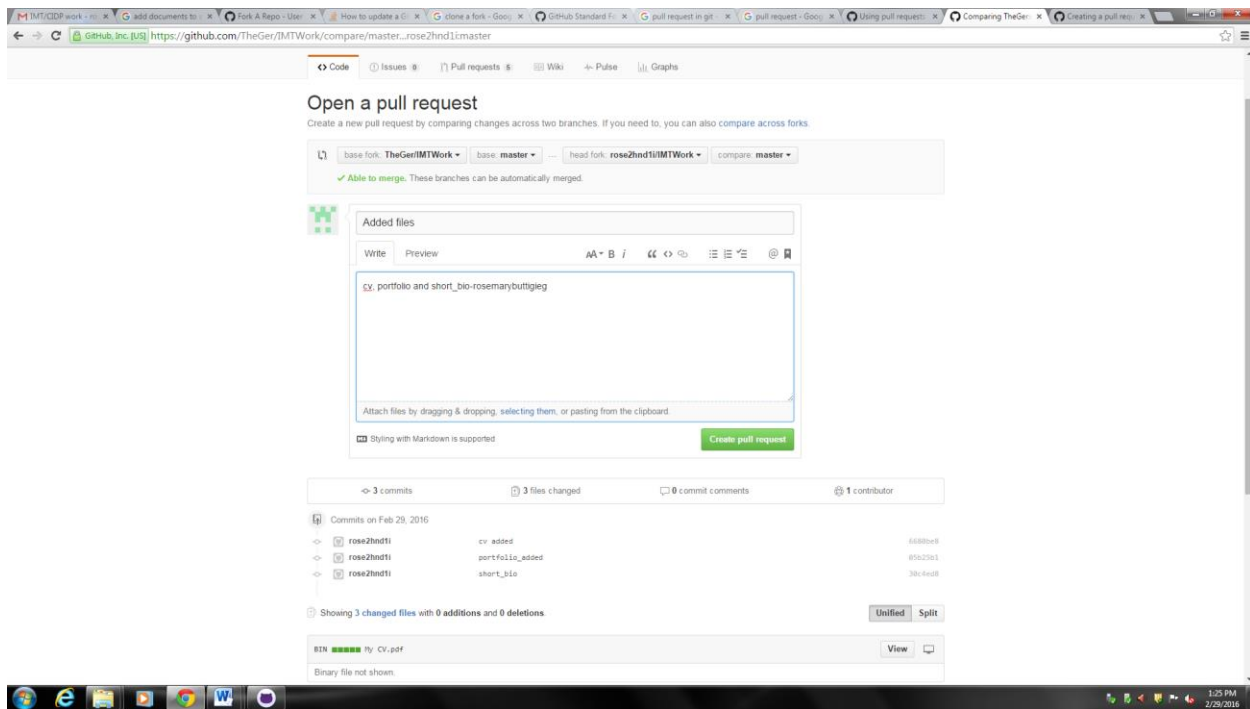

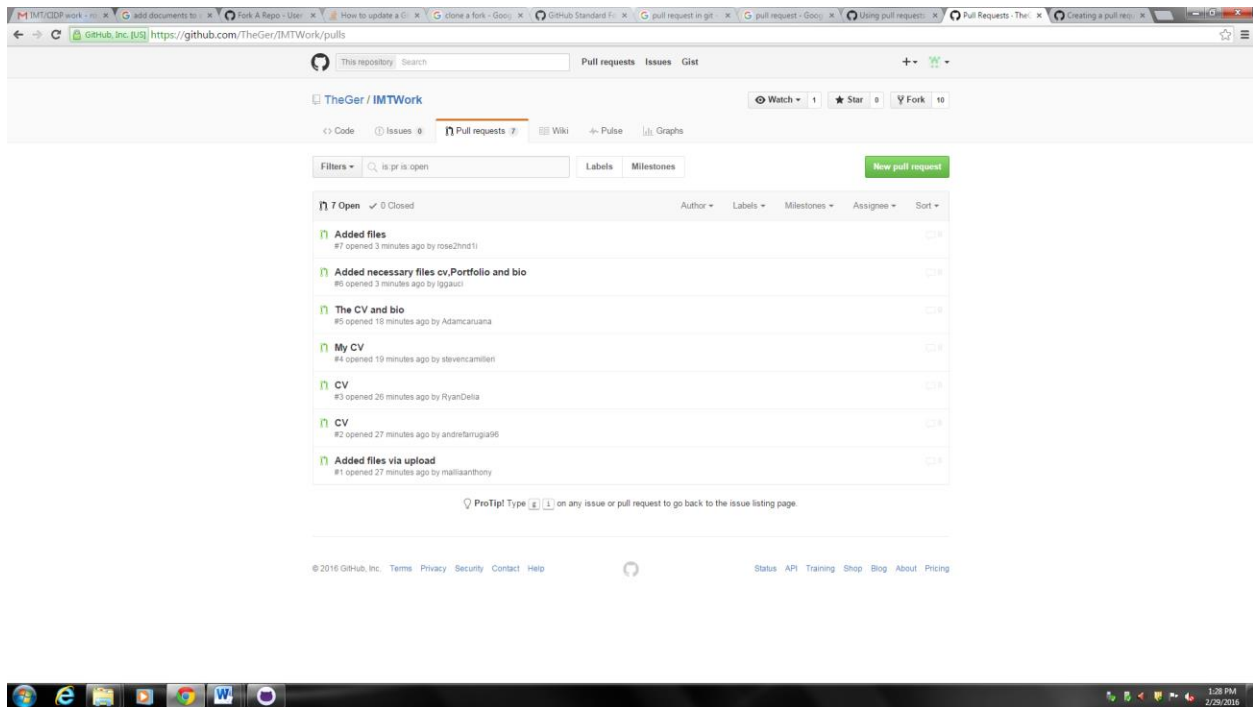

Explain what the .gitignore file is used for

The .gitignore file tells git which files are to be ignored in your directory. This is a way to avoid committing temporary files that aren't useful to other collaborators, such as .DS\_Store files (if you're on Mac).