Visoka škola strukovnih studija za informacione i komunikacione tehnologije u Beogradu

Visoka ICT škola

Web programiranje 1 – Dokumentacija za sajt

Ime I prezime studenta: Marjanovic Aleksandar

https://github.com/TheHandOfKing/Hike-Shoes/

Broj indeksa: 115/17

Sadrzaj:

- 1. Uvod
- 1.1. Korišćeni programski i markup jezici
- 1.2. Opis funkcionalnosti
- 1.3. Izgled i kodovi, zajedno sa css-om
- 2. Organizacija
- 2.1. Organizaciona šema
- 2.2. Sitemap

1 Uvod

Sajt za predmet Web Programiranje 1 napravljen je po uzoru na sajt Nike.com bez upotpunjenog responsive design-a.

1.1 Korisceni programski I markup jezici

HTML 5, CSS 3, Javascript, Jquery

1.* Pored ovoga korisceni su i font awesome i google 'Oswald' font, sve ostalo je radjeno u js-u

1.2 Opis funkcionalnosti

Index.html

Dinamicki ispis sadrzaja vrsi se nad skoro celom stranom, postoje samo tagovi koji sluze kao placeholderi za ostale tagove. Postoje i rucno pravljeni tagovi, bez dinamickog ispisivanja radi lakseg koriscenja. Napravljen je carousell sa tekstom koji moze da se menja klikom na strelice. Ispod je isti carousell bez strelica, sa

slikama i automatskim tajmerom menjanja slika, svaka slika ima razlicito vreme menjanja. Svaki a i span tag ima funkcionalnost preko event listener-a. Join/log in tag koristi prevent default, I time se klikom na njega ne vodi ka linku vec se otvara div za login, koji je najosnovniji, sa 2 input taga i login button-om, koji zbog tematike predmeta nisu podrzani i ne rade trenutno nista. Pored njega je tag koji vodi do biranja jezika, treba napomenuti da se index stranica nece nikad ucitati ako jezik nije izabran, i da kad god se bira novi jezik stari se brise. Ovo je uradjeno preko najosnovnijeg local storage-a, koji ako je prazan odvesce nas na stranicu gde se biraju jezici.

Ispod svega ovoga se nalaze Shop now i New? Register! span tagovi. Shop Now vodi do stranice za kupovinu, o kojoj ce biti reci kasnije, New? Register! ima event listener koji kao I join/login a tag prvo boji celu pozadinu u crno sa opacity-jem 0.7. Onda otvara div za registraciju, koja pokriva username, password I e-mail. Svaki od tih input tagova ima svoj regex koji proverava validnost podataka, opet, button Create an Account nema funkcionalnost, jer nema baze I serverskij jezika koji podrzavaju prenete informacije. Na oba diva p tag sa X-om stavlja display svih tagova za login i regeister, i crne pozadine na none. Footer, koji se koristi svuda ima samo dinamicko ispisivanje teksta.

hikeLangSelect.html

Deo gde se biraju jezici je skroz dinamicki ispisan, svi divovi I sav tekst. Svaka selekcija jezika iz bilo kog regiona se pamti u Local Storage-u I koristi se na ostalim stranama. Zbog samog local storage-a ovo je prva strana koju ce korisnik videti.

Klikom na bilo koji region, border oko regiona postaje boldovan I za taj region se ispisuju drzave karakteristicne za njega. Treba pomenuti I hr tag sa crnom linijom koja prati selekciju regiona. Ovo je uradjeno preko event/ event. Target i event. Current Target funkcionalnosti unutar javascript-a. Slike drzava su jedna slika sa razlicitim koordinatama. Ako se odabere region Rest of Africa, on se vodi I ispisuje svuda kao Central Africa.

Shop.html


Pored najosnovnijeg dinamickog ispisivanja sadrzaja za patike, postoji I opcija da se item-I dodaju u korpu. Klikom na cenu uzimaju se podaci iz tog diva, a to su


uvek 3 podatka, cena, naziv (data-shoes), I slika koji se dodaju u div klasu koja se zove one row, funkcija koja pravi div klasu one row uzima ova 3 podatka za svoje parametre I koristi ih u pravljenju, parametri se uzimaju preko klika. Postoje 4 funkcije koje pokrivaju ovu celu stranu. Prva cartTotalUpdate(), u svakom trenutku prati koja je ukupna cena svih datih item-a u cart-u, tako da se ona koristi kada se strana ucita, kada se klikne na cenu, kada se klikne na remove i kada se poveca ili smanji quantity bilo kog itema. Sledeca addToCart upravo dodaje iteme u korpicu I koristi 2 funkcije, addItemToCart I cartTotalUpdate. Preko parametra event.target znamo na sta smo kliknuli, I to na sta smo kliknuli prenosimo u drugu funkciju (addItemToCart) da bi pravili redove divova za iteme.

Treca addItemToCart f-ja koristi 3 parametra koja sam vec naveo. Ona kreira div klasu oneRow, i ima par restrikcija, zabranjuje da se dodaju 2 ista itema, jer postoji quantity opcija, to se radi samo preko return-a, obican if statement. Da bi se item dodao koristi se varijabla carRowContnet koja pravi sve unutar oneRow-a, odnosno 3 diva, za sliku, cenu i kolicinu. Svaki put kada se klikne na neki item izvrsava se I cartTotalUpdate(). Poslednja, cetvrta purchaseSim() f-ja nas samo alertuje da smo nesto kupili I clear-uje sve divove sa klasom oneRow, preko while-a, I naravno ima cartTotalUpdate() da bi se cena resetovala na nulu.


Ostale stranice nemaju posebnih funkcionalnosti koje treba da se navedu, sajt, treba opet naglasiti nije responsive.

1.3 Izgled

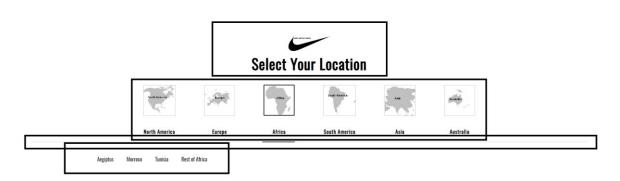

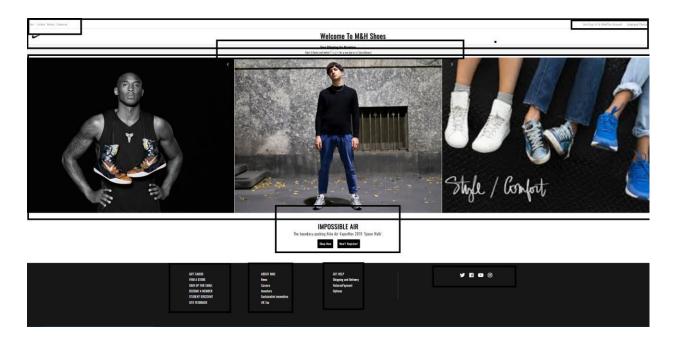



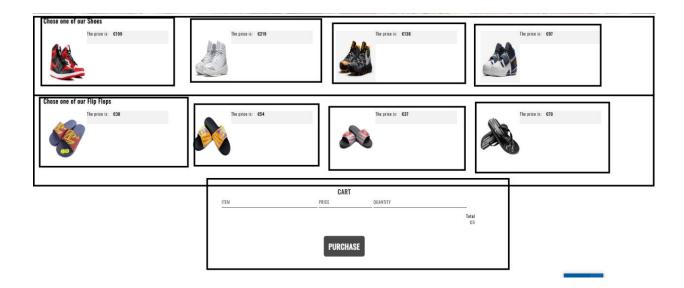

Kod koriscen za pravljenje ovih stranica:

Index.html:

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <meta http-equiv="X-UA-Compatible" content="ie=edge">
   <script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.3.1/jquery.min.js"></script>
    <link rel="stylesheet"</pre>
href="https://use.fontawesome.com/releases/v5.6.3/css/all.css" integrity="sha384-
UHRtZLI+pbxtHCWp1t77Bi1L4ZtiqrqD80Kn4Z8NTSRyMA2Fd33n5dQ8lWUE00s/"
crossorigin="anonymous">
   <link rel="icon" href="images/MikeAndIke.png">
   <link href="https://fonts.googleapis.com/css?family=Oswald" rel="stylesheet">
   <link rel="stylesheet" href="css/styleForIndex.css" type="text/css">
   <title>Mike. Just boo it. Ike.com</title>
</head>
<body>
   <div id="headerBase">
       <div id="ulHolder">
       <l
           Nike +</a>
           Jordan
           Hurley
           Converse
```

```
</div>
   <div id="otherInfo">
       <a id="loginWindow">Join/Log In To NikePlus Account</a>
       <a id="storageClear" href="hikeLangSelect.html">Language
Choice</a>
   </div>
   </div>
   <div id="headerUse">
       <a href="index.html"><img src="images/testLogo.png" alt="logoImage"/></a>
       <h1>Welcome To M&H Shoes</h1>
   </div>
   <div id="discount">
       <div id="shuffle">
           <div class="promoBlock">
              Free Shipping for Members
              Want it faster and better? <a</pre>
href="login.html">Login</a> for a one day or a 2 day delivery!
           </div>
           <div class="promoBlock">
              EXTRA 25% OFF ON SALE ITEMS
              Use the code SAVE25 at any of our stores to get
a 25% of on any of our merchandise!
           </div>
           <div class="promoBlock">
              60-DAY FREE RETURNS
              If you are not satisfied with the merchandise
you bought you may return it for another one. Also comes with a 2 year
guarantee
           </div>
               <a id="prev" onclick="plusSlides(-1)">&#10094;</a>
              <a id="next" onclick="plusSlides(1)">&#10095;</a>
       </div>
   </div>
   <div id="contents">
   </div>
   <div id="registerAndShop">
       <div id="loginBracket">
           IMPOSSIBLE AIR
           The boundary-pushing Nike Air VaporMax 2019 'Space Walk'.
           <div id="loginDist">
              <a href="shop.html">Shop Now</a>
              <span id="register">New? Register!</span>
           </div>
```

```
</div>
   </div>
   <div id="loginModal">
       <div id="loginContent">
           <span class = "closingSpan">x</span>
           Username <input type="text">
           Password <input type="password">
           <span class="loginSpan">Login</span>
       </div>
       <div id="registerContent">
           <span class = "closingSpan">x</span>
           <h2>BECOME A NIKEPLUS MEMBER</h2>
           Username must be between 3
or 16 characters long, without numbers<input type="text"
placeholder="Username" name="username" id="testName" required>
           A password must have a
minimum eight characters, at least one letter and one number<input
type="password" placeholder="Password" id="testPassword" name="password"
required>
           E-mail not valid or of
incorrect format<input type="email" placeholder="E-mail" id="emailReg">
           <select name="select" id="someCountries">
                  <option value="" disabled selected>Select Your
Country</option>
           </select>
       <div id="labelbox">
           <input type="checkbox" name="checkbox" id="checkbox"><label</pre>
for="checkbox">Sign up for emails to hear all the latest from Nike.</label>
       </div>
       <div id="buttonDiv">
       <button id="accountConfirm">Create An Account/button>
   </div>
       </div>
   </div>
   <footer id="footerBase">
       <div id="middleContent">
           <div id="contentHolder">
           <div id="biggerPart">
           </div>
           <div id="smallerOne">
                  <a href="https://twitter.com/nike"><i class="fab fa-</pre>
twitter"></i></a>
                  <a href="https://www.facebook.com/"> <i class="fab fa-</pre>
facebook-square"></i></a>
```

```
<a href="https://www.youtube.com/"><i class="fab fa-</pre>
voutube"></i></a>
                   <a href="https://www.instagram.com/"><i class="fab fa-</pre>
instagram"></i></a>
           </div>
       </div>
       <div id="bottomContent">
           <div id="leftSide">
               Language not chosen
           </div>
           <div id="rightSide">
               <a href="#">Sitemap</a>
               <a href="about.html">About the Maker</a>
               <a href="documentation.pdf">Documentation</a>
           </div>
           </div>
       </div>
   </footer>
</body>
<script src="js/index.js"></script>
</html>
```

Index.js

```
var localHolder = document.getElementById("placeHolderForCookies");
var allStates =["United States", "America Latina", "Canada", "Mexico", "Puerto
Rico", "BELGIUM", "BULGARIA", "ČESKÁ", "SERBIA", "DANMARK", "DEUTSCHLAND",
"ΕΛΛΑΔΑ", "ESPAÑA", "FINLAND", "FRANCE", "IRELAND", "ISRAEL",
"ITALIA","Aegiptus", "Morroco", "Tunisia", "Rest of Africa","Argentina",
"Uruguay", "Chile", "Brasil", "America Latina","中国大陆", "台灣", "日本",
"대한민국", "ประเทศไทย", "India","Australia", "New Zealand"];
for(state in allStates){
    var localGetter = localStorage.getItem("state")
    if(localGetter == allStates[state]){
        localHolder.innerHTML = "You are from " + localGetter;
        document.title = "Mike and Hike " + localGetter;
    else if(localGetter === "Rest of Africa"){
        document.title = "Hike Official Central Africa";
        localHolder.innerHTML = "You are from Central Africa";
if(localStorage.length == 0){
    window.location.replace("hikeLangSelect.html")
```

```
//Code above is just an example of a local storage use, i've done this just to
ease up on further projects
//It's a small piece of code that i really like
let storageClear = document.getElementById("storageClear");
storageClear.addEventListener("click", function(){
    localStorage.clear();
});
//Also added a way to clear storage
var slidePointer = 1;
showSlides(slidePointer);
function plusSlides(num) {
    showSlides(slidePointer += num);
function showSlides(num) {
    var i;
    var rotatingSlides = document.getElementsByClassName("promoBlock");
    if (num > rotatingSlides.length) {slidePointer = 1}
    if (num < 1) {slidePointer = rotatingSlides.length}</pre>
    for (i = 0; i < rotatingSlides.length; i++) {</pre>
        rotatingSlides[i].style.display = "none";
    rotatingSlides[slidePointer-1].style.display = "block";
//Creation of images stuff//
var slides1 = document.getElementsByClassName("classImage1"); //Getting class
specific slides to work
var slides2 = document.getElementsByClassName("classImage2");
var slides3 = document.getElementsByClassName("classImage3");
var getDivs = document.getElementsByClassName("shoesImages"); //Get shoes by cl
var contents = document.getElementById("contents");
for(i=0; i<9; i++){
    var creation = document.createElement("DIV");
    if(i<3){
    creation.className += "shoesImages "+ "img"+[i] + " " + "classImage1";
    else if(i<6 && i>=3){
    creation.className += "shoesImages "+ "img"+[i] + " " + "classImage2";
```

```
else if(i < 9 \&\& i > = 6){
    creation.className += "shoesImages "+ "img"+[i] + " " + "classImage3";
    contents.appendChild(creation);
//AutomaticSlideshow
var slideIndex = 0;
function firstSet(){
    var slideGetter1 = document.getElementsByClassName("classImage1");
    for(i=0; i<slideGetter1.length; i++){</pre>
        slideGetter1[i].style.display = "none";
    slideIndex++
    if(slideIndex > slideGetter1.length){slideIndex = 1}
    slideGetter1[slideIndex-1].style.display = "block";
    setTimeout(firstSet,1800);
function secondSet(){
    var slideGetter2 = document.getElementsByClassName("classImage2");
    for(i=0; i<slideGetter2.length; i++){</pre>
        slideGetter2[i].style.display = "none";
    slideIndex++
    if(slideIndex > slideGetter2.length){slideIndex = 1}
    slideGetter2[slideIndex-1].style.display = "block";
    setTimeout(secondSet,3600);
function thirdSet(){
    var slideGetter3 = document.getElementsByClassName("classImage3");
    for(i=0; i<slideGetter3.length; i++){</pre>
        slideGetter3[i].style.display = "none";
    slideIndex++
    if(slideIndex > slideGetter3.length){slideIndex = 1}
    slideGetter3[slideIndex-1].style.display = "block";
    setTimeout(thirdSet,2700);
firstSet();
secondSet();
thirdSet();
//Read the note
```

```
//Part for footer NOTE: I have came across an idea to make just one js extention
for this part of code and make everything cleaner, but it came to me at the end
of the whole site making thing, and i consider it to be a hassle//
var classHolder = document.getElementById("biggerPart");
for(i=0; i<3; i++){
    var newClasses = document.createElement("DIV");
    newClasses.className += "letterContent";
    classHolder.appendChild(newClasses);
var firstClass = ["GIFT CARDS","FIND A STORE","SIGN UP FOR EMAIL","BECOME A
MEMBER", "STUDENT DISCOUNT", "SITE FEEDBACK"];
var classGet = document.getElementsByClassName("letterContent");
for(i=0; i<firstClass.length; i++){</pre>
    classGet[0].innerHTML += "" + firstClass[i] + "";
var secondClass = ["ABOUT NIKE","News","Careers","Investors","Sustainable
Innovation", "UK Tax"];
for(i=0; i<secondClass.length; i++){</pre>
    classGet[1].innerHTML += "" + secondClass[i] + "";
var thirdClass = ["GET HELP", "Shipping and Delivery", "ReturnsPayment",
"Options"];
for(i=0; i<thirdClass.length; i++){</pre>
    classGet[2].innerHTML += "" + thirdClass[i] + "";
var spanClose = document.getElementsByClassName('closingSpan')[0]
var otherLoginClose = document.getElementsByClassName('closingSpan')[1]
spanClose.addEventListener('click', closeLogin)
otherLoginClose.addEventListener('click', closeLogin)
function closeLogin(){
    var loginContent = document.getElementById("loginContent")
    loginContent.setAttribute("style", "display:none")
    var bgGet = document.getElementById("loginModal")
    bgGet.setAttribute("style", "display:none")
}//x function close done
//setup for login
var getLoginButton = document.getElementsByClassName('loginSpan')[0]
getLoginButton.addEventListener('click', function(){
```

```
alert("Unfortunatley we dont support this option yet, but you're family so
hey, hop in !")
    closeLogin()
})
var getLogin = document.getElementById("loginWindow")
var getRegister = document.getElementById("register")
$(document).ready(function() {
    $(getLogin).click(function(event){
        event.preventDefault();
        $("#loginModal").fadeIn();
        $("#loginContent").fadeIn();
        $("#registerContent").css("display", "none");
      });
    $(getRegister).click(function(){
        $("#loginModal").fadeIn();
        $("#registerContent").fadeIn();
    });
    var regeExEmail =/^\w+([\.-]\w+)*@\w+([\.-]?\w+)*(\.\w{2,4})+$/
    var usernameRegex = /^([a-zA-Z]{3,16})$/
    //Minimum eight characters, at least one letter and one number:
    var passwordRegex = /^(?=.*[A-Za-z])(?=.*\d)[A-Za-z\d]{8,}
    $('#testName').on('keypress keydown keyup',function(){
        if (!$(this).val().match(usernameRegex)) {
            $('#paraUName').removeClass('hidden');
            $('#paraUName').show();
      else{
           $('#paraUName').addClass('hidden');
    });
    $('#testPassword').on('keypress keydown keyup',function(){
        if (!$(this).val().match(passwordRegex)) {
            $('#paraPass').removeClass('hidden');
            $('#paraPass').show();
      else{
           $('#paraPass').addClass('hidden');
    });
    $('#emailReg').on('keypress keydown keyup',function(){
        if (!$(this).val().match(regeExEmail)) {
            $('#paraEmail').removeClass('hidden');
            $('#paraEmail').show();
```

styleForIndex.cs koji pokriva i about, i shop stranice

```
margin:0px;
    padding:0px;
    letter-spacing: 1px;
    text-decoration: none;
    font-family: 'Oswald', sans-serif;
    box-sizing: border-box;
#headerUse h1{
    margin:10px;
    right:42%;
    position: absolute;
a{
    color:rgb(160, 156, 146);
    font-size: 13px;
    padding:20px;
#ulHolder p{
    color:rgb(160, 156, 146);
    font-size: 12px;
    padding:5px;
#headerBase{
    height:39px;
    width:100%;
```

```
border-bottom: 1px solid rgba(192, 185, 168, 0.568);
ul{
    display:flex;
    list-style-type: none;
    height:100%;
#headerBase ul li{
    box-shadow: inset -1px 0 0 0 #e5e5e5;
    padding-top:5px;
#ulHolder{
   height:100%;
    float:left;
#otherInfo{
   float:right;
    display:flex;
   height:100%;
#otherInfo a{
    padding:10px;
#headerUse{
   min-height: 70px;
    display:flex;
    border-bottom:1px solid rgba(192, 185, 168, 0.568);
#headerUse a{
    color:rgb(160, 156, 146);
   font-size: 0px;
    padding:0px;
#headerUse img{
   height: 72px;
   width:72px;
   padding:10px;
   box-sizing: border-box;
   margin-left:10px;
```

```
#midDiv{
   margin:0 auto;
#discount{
   height: 60px;
    background-color: #f7f7f7;
   width:100%;
#shuffle{
   margin:0 auto;
   width: 50%;
#shuffle a{
   text-align: center;
    display:inline-flex;
.promoBlock{
   height:60px;
   width:60%;
   margin:0 auto;
.promoBlock p{
   text-align: center;
    letter-spacing: 0.3px;
    font-weight: bold;
.promoBlock a{
   padding:0;
   font-size:15px;
.promoBlock .smallP{
   font-size:12.5px;
    letter-spacing: 0px;
    font-weight: 100;
/*Carousell */
```

```
#prev, #next {
    cursor: pointer;
    position: absolute;
    top: 13.9%;
    width: auto;
    margin-top: -22px;
    padding: 16px;
    font-weight: bold;
    font-size: 18px;
    transition: 0.6s ease;
    border-radius: 0 3px 3px 0;
    right: 67%;
#next {
    right: 31%;
    border-radius: 3px 0 0 3px;
#prev:hover, #next:hover {
    background-color: rgba(0, 0, 0, 0.034);
#contents{
    width:100%;
    height:713px;
    background-color:rgba(201, 201, 201, 0.39);
    display: flex;
.shoesImages{
    width:33.3%;
    display:inline-flex;
    height:100%;
    margin:0 auto;
.img0{
    background: url(../images/img0.jpg) no-repeat center center;
    -webkit-background-size: cover;
    -moz-background-size: cover;
    -o-background-size: cover;
    background-size: cover;
.img1{
    background: url(../images/img1.jpg) no-repeat center center;
```

```
-webkit-background-size: cover;
   -moz-background-size: cover;
   -o-background-size: cover;
   background-size: cover;
.img2{
       background: url(../images/img2.jpg) no-repeat center center;
        -webkit-background-size: cover;
       -moz-background-size: cover;
       -o-background-size: cover;
       background-size: cover;
.img3{
   background: url(../images/img3.jpg) no-repeat center center;
   -webkit-background-size: cover;
   -moz-background-size: cover;
   -o-background-size: cover;
   background-size: cover;
.img4{
   background: url(../images/img4.jpg) no-repeat center center;
   -webkit-background-size: cover;
   -moz-background-size: cover;
   -o-background-size: cover;
   background-size: cover;
.img5{
   background: url(../images/img5.jpg) no-repeat center center;
   -webkit-background-size: cover;
   -moz-background-size: cover;
   -o-background-size: cover;
   background-size: cover;
.img6{
   background: url(../images/img6.jpg) no-repeat center center;
   -webkit-background-size: cover;
   -moz-background-size: cover;
   -o-background-size: cover;
   background-size: cover;
```

```
.img7{
    background: url(../images/img7.jpg) no-repeat center center;
    -webkit-background-size: cover;
    -moz-background-size: cover;
    -o-background-size: cover;
    background-size: cover;
.img8{
    background: url(../images/img8.jpg) no-repeat center center;
    -webkit-background-size: cover;
    -moz-background-size: cover;
    -o-background-size: cover;
    background-size: cover;
#registerAndShop{
   width:100%;
    height: 170px;
    margin-top:30px;
#footerBase{
    display:flex;
    width:100%;
    background-color:rgba(10, 10, 10, 0.945);
    height: 430px;
    margin-top:30px;
#middleContent{
    width:50%;
    height:100%;
    margin:0 auto;
#loginBracket{
    height:inherit;
   width:50%;
    margin:0 auto;
    text-align: center;
    padding-top:10px;
#loginBracket p:first-child{
   font-weight: bold;
```

```
font-size:29px;
#loginDist{
    margin-top:20px;
#loginBracket a{
    padding:10px;
   background-color:black;
    color:white;
    border-radius: 2px;
   margin-right:5px;
   margin-left:10px;
#contentHolder{
   width:100%;
   height: 90%;
    border-bottom: 1px solid #444;
#biggerPart{
   width:70%;
    float:left;
   height: 100%;
    display:flex;
.letterContent{
   width:33%;
   height:35%;
   text-align: left;
    color:white;
   margin-top:35px;
.letterContent:last-child{
    border-right:1px solid #444;
.letterContent p{
   margin:5px;
    letter-spacing: .03em;
   font-size: 14px;
    padding-left:25px;
```

```
#smallerOne{
   width:30%;
    float:right;
   height:100%;
    text-align: right;
#smallerOne a{
   font-size:22px;
   color:white;
    padding:8px;
#smallerOne i{
   margin-top:45px;
#bottomContent{
   height:10%;
   width:100%;
#rightSide{
   width:65%;
   height: 100%;
   float: right;
   text-align: right;
#leftSide{
   width:35%;
   height:100%;
   float:left;
    text-align:left;
#placeHolderForCookies{
    color:rgb(160, 156, 146);
    font-size: 13px;
#nbaShoesPromo{
   width:100%;
```

```
height: 700px;
    background: url(../images/allStarImage.jpg) no-repeat center center;
    -webkit-background-size: cover;
    -moz-background-size: cover;
    -o-background-size: cover;
    background-size: cover;
.shoeHolder{
   width:97%;
   height:230px;
   margin:20px auto;
.descShoe{
   margin-top:10px;
    margin-left:40px;
.products{
   width:20%;
    height:100%;
    display:inline-flex;
   margin-left:20px;
    margin-right:70px;
   border-radius:1px;
.price{
   width:100%;
   height:50px;
    display:inline-flex;
    background-color:rgb(243, 242, 242);
    cursor: pointer;
.price p{
    text-align: center;
#cartItemHolder{
   width:55%;
   margin:60px auto;
    font-weight: normal;
    color: #333;
    text-align: center;
```

```
.sectionDesc{
  margin:0 auto;
.cart{
   display: inline-flex;
   align-items: center;
   border-bottom: 1px solid black;
   padding-bottom: 10px;
   margin-top: 10px;
.item{
   width: 36%;
.cost{
   width: 20%;
   color: #333;
.quantity{
   width: 35%;
.oneRow{
   display: flex;
   width:94%;
   margin:10px auto;
.cartItemPart{
   display: flex;
   align-items: center;
   border-bottom: 1px solid black;
   padding-bottom:10px;
   margin:10px auto;
.image-cart{
   width:38.5%;
.price-cart{
```

```
width: 20%;
.quantity-cart{
   width: 35%;
.cart-input{
   height: 34px;
   width: 50px;
   border-radius: 5px;
   border: 1px solid rgb(0, 0, 0);
   background-color: #eee;
   color: #333;
   padding: 0;
   text-align: center;
   font-size: 1.2em;
   margin-right: 25px;
.buttonRemove{
   cursor: pointer;
   padding: .67em .67em;
   color: white;
   background-color: rgb(73, 73, 73);
   border: none;
   border-radius: .3em;
   font-weight: bold;
.totalPrice{
   text-align: end;
   margin-top: 10px;
   margin-right: 10px;
.buttonPurchase{
   display: block;
   margin: 40px auto 80px auto;
   cursor: pointer;
   padding: .67em .67em;
   color: white;
   background-color: rgb(73, 73, 73);
   border: none;
   border-radius: .3em;
   font-weight: bold;
```

```
font-size: 1.75em;
.shoeHolder img{
   height: 200px;
.item-price{
    font-weight: bold;
.oneRow img{
   height: 50px;
.cartItems{
   max-width: 1000px;
   margin-bottom:20px;
    padding:0 1.5em;
#allCartHolder{
   max-width: 1900px;
   margin: 0 auto;
    padding: 0 1.5em;
#loginModal{
   width:100%;
   height:164.7%;
    background-color: rgba(0,0,0, 0.7);
    position: absolute;
    top:0;
    display:none;
#loginContent{
   width:500px;
   height:300px;
    background-color:white;
   margin:180px auto 0px auto;
    text-align: center;
   display:none;
```

```
.closingSpan{
    width:100%;
    float:right;
    text-align:right;
    margin-right:20px;
    cursor: pointer;
    margin-bottom:30px;
#loginContent input{
    width:80%;
    padding:5px 0px 5px 0px;
#loginWindow{
    cursor:pointer;
.loginSpan{
   width:30%;
    display:inline-block;
    padding:10px;
    background-color:black;
    margin:50px auto 50px auto;
    color:white;
    cursor: pointer;
#register{
   cursor:pointer;
    padding: 10px;
    background-color: black;
    color: white;
    border-radius: 2px;
    margin-right: 5px;
   margin-left: 10px;
   font-size: 13px;
#registerContent{
   height:580px;
    width:500px;
    background-color:white;
    position:fixed;
   top: 10%;
```

```
left: 36%;
#registerContent h2{
    text-align: center;
#registerContent input{
    border: 1px solid rgba(192, 185, 168, 0.568);
    border-radius:5px;
    margin:0px auto 26px auto;
    padding:10px;
    width:80%;
    display:flex;
#someCountries{
    border: 1px solid rgba(192, 185, 168, 0.568);
    border-radius:5px;
    margin:0px auto 36px auto;
    padding:10px;
    width:80%;
    display:flex;
label{
    font-size: 13px;
    padding-left: 14px;
#labelbox{
    line-height: 40px;
    text-align: center;
    display: inline-block;
    width: 100%;
#registerContent #checkbox{
    width:5%;
    display:inline-block;
    padding:0px;
    margin-top:0px;
    height: 15px;
#buttonDiv{
```

```
width:100%;
    text-align: center;
#registerContent #accountConfirm{
   margin-top:20px;
   padding:17px;
    border:0;
    background-color:black;
    color:white;
    border-radius:4px;
#registerContent h2{
    margin-bottom:20px;
#registerContent .testEmail{
   font-size:12px;
    color:red;
   margin-left:55px;
    font-weight: bold;
#registerContent .hidden{
    display:none
/*about creator*/
#aboutCreator{
   width:100%;
   height:600px;
   text-align: center;
#aboutCreator img{
    margin-top:50px
#aboutCreator p{
   width:60%;
   margin:20px auto;
    letter-spacing: 0px;
```

```
#aboutCreator h1{
    margin-top:40px;
}
```

Shop.html

```
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <meta http-equiv="X-UA-Compatible" content="ie=edge">
   <script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.3.1/jquery.min.js"></script>
   <link rel="icon" href="images/MikeAndIke.png">
   <link rel="stylesheet"</pre>
href="https://use.fontawesome.com/releases/v5.6.3/css/all.css" integrity="sha384-
UHRtZLI+pbxtHCWp1t77Bi1L4ZtiqrqD80Kn4Z8NTSRyMA2Fd33n5dQ81WUE00s/"
crossorigin="anonymous">
   <link href="https://fonts.googleapis.com/css?family=Oswald" rel="stylesheet">
   <link rel="stylesheet" href="css/styleForIndex.css" type="text/css">
   <title>Mike. Just boo it. Ike.com</title>
</head>
<body>
   <div id="headerBase">
       <div id="ulHolder">
       <l
           Nike +
           Jordan
           Hurley
           Converse
       </div>
   <div id="otherInfo">
       <a id="storageClear" href="hikeLangSelect.html">Language
Choice</a>
   </div>
   </div>
   <div id="headerUse">
           <a href="index.html"><img src="images/testLogo.png"</pre>
alt="logoImage"/></a>
           <h1>Welcome To M&H Shoes</h1>
   </div>
```

```
<div id="nbaShoesPromo">
    </div>
    <div class="descShoe">
            <h2>Chose one of our Shoes</h2>
    </div>
    <div class="shoeHolder">
    </div>
    <div class="descShoe">
            <h2>Chose one of our Flip Flops</h2>
    </div>
    <div class="shoeHolder">
    </div>
    <section id="allCartHolder">
        <div id="cartItemHolder">
            <h1 class="sectionDesc">CART</h1>
            <div class="descRow">
                <span class="cart item">ITEM</span>
                <span class="cart cost">PRICE</span>
                <span class="cart quantity">QUANTITY</span>
            </div>
            <div class="cartItems">
            </div>
            <div class="totalPrice">
                <strong class="total">Total</strong> <div</pre>
class="cartTotalPrice">€0</div>
             </div>
            <button class="buttonPurchase">PURCHASE</button>
        </div>
    </section>
    <footer id="footerBase">
            <div id="middleContent">
                <div id="contentHolder">
                <div id="biggerPart">
                </div>
                <div id="smallerOne">
                        <a href="https://twitter.com/nike"><i class="fab fa-</pre>
twitter"></i></a>
                        <a href=""> <i class="fab fa-facebook-square"></i></a>
                        <a href=""><i class="fab fa-youtube"></i></a>
                        <a href=""><i class="fab fa-instagram"></i></a>
                </div>
            </div>
            <div id="bottomContent">
```

Shoes.js

```
var localHolder = document.getElementById("placeHolderForCookies");
var allStates =["United States", "America Latina", "Canada", "Mexico", "Puerto
Rico", "BELGIUM", "BULGARIA", "ČESKÁ", "SERBIA", "DANMARK", "DEUTSCHLAND",
"ΕΛΛΑΔΑ", "ESPAÑA", "FINLAND", "FRANCE", "IRELAND", "ISRAEL",
"ITALIA", "Aegiptus", "Morroco", "Tunisia", "Rest of AfricaRest of
Afr", "Argentina", "Uruguay", "Chile", "Brasil", "America Latina", "中国大陆", "台灣
', "日本", "대한민국", "ประเทศไทย", "India","Australia", "New Zealand"];
var localGetter = localStorage.getItem("state");
if(localGetter === "Rest of Africa"){
    document.title = "Hike Official Central Africa";
    localHolder.innerHTML = "You are from Central Africa";
else{
    for(state in allStates){
        if(localGetter == allStates[state]){
            localHolder.innerHTML = "You are from " + localGetter;
            document.title = "Mike and Hike " + localGetter;
            break;
        }
//Code above is just an example of a local storage use, i've done this just to
ease up on further projects
//It's a small piece of code that i really like
let storageClear = document.getElementById("storageClear");
```

```
storageClear.addEventListener("click", function(){
    localStorage.clear();
});
var classHolder = document.getElementById("biggerPart");
for(i=0; i<3; i++){
    let newClasses = document.createElement("DIV");
    newClasses.className += "letterContent";
    classHolder.appendChild(newClasses);
var firstClass = ["GIFT CARDS","FIND A STORE","SIGN UP FOR EMAIL","BECOME A
MEMBER", "STUDENT DISCOUNT", "SITE FEEDBACK"];
var classGet = document.getElementsByClassName("letterContent");
for(i=0; i<firstClass.length; i++){</pre>
    classGet[0].innerHTML += "" + firstClass[i] + "";
var secondClass = ["ABOUT NIKE", "News", "Careers", "Investors", "Sustainable
Innovation", "UK Tax"];
for(i=0; i<secondClass.length; i++){</pre>
    classGet[1].innerHTML += "" + secondClass[i] + "";
var thirdClass = ["GET HELP", "Shipping and Delivery", "Returns", "Payment",
"Options"];
for(i=0; i<thirdClass.length; i++){</pre>
    classGet[2].innerHTML += "" + thirdClass[i] + "";
//Shoe creation and buying stuff
var classShoeGet = document.getElementsByClassName("shoeHolder");
for(i = 0; i<4; i++){
    var shoes = document.createElement("DIV");
    shoes.className += "products" + " " + "shoe"+[i]
    classShoeGet[0].appendChild(shoes)
    var imageSet = document.getElementsByClassName("products")
    var image = document.createElement("IMG")
    image.src = "images/shoe"+[i] +".jpg"
    image.alt = "shoe"+[i]
    imageSet[i].appendChild(image);
    image.className += "image" + " " + "shoe"+[i]
//image specific for loop
for(i = 0; i<4; i++){
```

```
var shoes = document.createElement("DIV");
    shoes.className += "products" + " " + "flop"+[i] + " " + "flip"
    classShoeGet[1].appendChild(shoes);
    var imageSet = document.getElementsByClassName("flip")
    var image = document.createElement("IMG")
    image.src = "images/flop"+[i] +".jpg"
    image.alt = "flop"+[i]
    imageSet[i].appendChild(image);
    image.className += "image" + " " + "flip"+[i]
var shoeFlopsGet = document.getElementsByClassName("products")
for(i =0; i< shoeFlopsGet.length; i++){</pre>
    let spanCreate = document.createElement("SPAN")
    spanCreate.className += "price";
    shoeFlopsGet[i].appendChild(spanCreate);
var shoeData= ["AirJordan", "Nike Zoom Kobe 3s", "Kyrie 5s", "LeBron", "Cleveland
Flops", "Laker Flops", "Houston Flops", "San Antonio Flip Flops"]
var prices = [199, 219, 138, 97, 38, 54, 37, 70];
var priceGet = document.getElementsByClassName("price");
for(i = 0; i< priceGet.length; i++){</pre>
    priceGet[i].innerHTML +=
        The price is: &nbsp &nbsp€${prices[i]}
    var pClass = document.getElementsByClassName("item-price")
    pClass[i].setAttribute("data-shoes", shoeData[i])
//Cart creation
var removeGet = document.getElementsByClassName("buttonRemove");
//makes button remove remove stuff
for( i = 0; i<removeGet.length; i++){</pre>
   var button = removeGet[i];
    button.addEventListener('click', removeItems) //event listener to know when
we remove and update total price
}
var inputQty = document.getElementsByClassName('cart-input') //follows the change
on inputs qty with eListener
for( i = 0; i<inputQty.length; i++){</pre>
    var input = inputQty[i]
    input.addEventListener("change", inputChange)
function removeItems(event){ // remove items on click, eazy peazy
```

```
var buttonClicked = event.target;
    buttonClicked.parentElement.parentElement.remove();
    cartTotalUpdate();
function inputChange(event){ //Chechks for number change on input
    var inputValue = event.target
    if(isNaN(inputValue.value) || inputValue.value <= 0){</pre>
        inputValue.value = 1
    cartTotalUpdate()
function cartTotalUpdate(){ // updates the total cart value once remove is
clicked
    var allItems = document.getElementsByClassName("cartItems")[0];
    var itemRows = allItems.getElementsByClassName("oneRow");
    var total = 0
    for( i = 0; i<itemRows.length; i++){</pre>
        var cartRow = itemRows[i]
        var cartPrice = cartRow.getElementsByClassName("price-cart")[0]
        var cartQuantity = cartRow.getElementsByClassName("cart-input")[0]
        var price = parseFloat(cartPrice.innerText.replace('€', ""))
        var quantity = cartQuantity.value
        total = total + (price * quantity)
    total = Math.round(total * 100) / 100
    document.getElementsByClassName("cartTotalPrice")[0].innerText = "€" + total
//Event listener for span
var addToCart = document.getElementsByClassName("item-price")
for( i = 0; i<addToCart.length; i++){</pre>
    var spanPrice = addToCart[i]
    spanPrice.addEventListener('click', addToCartFunction)
function addToCartFunction(event){
    var click = event.target
    var imageSearcher = click.parentElement.parentElement
    var title = click.getAttribute("data-shoes")
    var price = click.innerText
    var imageSource = imageSearcher.getElementsByClassName("image")[0].src
    addItemToCart(title, price, imageSource)
    cartTotalUpdate()
```

```
function addItemToCart(title, price, imageSource){
    var newCartRow = document.createElement("DIV")
    newCartRow.classList.add('oneRow')
    var cartItemsGetter = document.getElementsByClassName("cartItems")[0]
    var cartNames = document.getElementsByClassName("itemName")
    for (cart in cartNames){
        if(cartNames[cart].innerText == title){
            alert("You have added excess items of this type")
    var cartRowContent = `
    <div class="cartItemPart image-cart">
    <img src="${imageSource}" alt="">
    <span class="itemName">${title}</span>
    </div>
        <span class="cartItemPart price-cart">${price}</span>
<div class="cartItemPart quantity-cart">
    <input type="number" class="cart-input" value="1">
    <button class="buttonRemove">REMOVE</button>
</div>
    newCartRow.innerHTML = cartRowContent
    cartItemsGetter.append(newCartRow)
newCartRow.getElementsByClassName("buttonRemove")[0].addEventListener('click',
removeItems)
    newCartRow.getElementsByClassName("cart-input")[0].addEventListener('change',
inputChange)
document.getElementsByClassName("buttonPurchase")[0].addEventListener('click',
purchaseSim)
function purchaseSim(){
    alert('Thank you for your purchase')
    var cartItemsDel = document.getElementsByClassName('cartItems')[0]
    while(cartItemsDel.hasChildNodes()){
        cartItemsDel.removeChild(cartItemsDel.firstChild)
    cartTotalUpdate()
```

hikeLangSelect.html

```
<!DOCTYPE html>
<html lang="en">
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta http-equiv="X-UA-Compatible" content="ie=edge">
    <script
src="https://ajax.googleapis.com/ajax/libs/jquery/3.3.1/jquery.min.js"></script>
    <link rel="icon" href="images/MikeAndIke.png">
    <link rel="stylesheet"</pre>
href="https://use.fontawesome.com/releases/v5.6.3/css/all.css" integrity="sha384-
UHRtZLI+pbxtHCWp1t77Bi1L4ZtiqrqD80Kn4Z8NTSRyMA2Fd33n5dQ81WUE00s/"
crossorigin="anonymous">
    <link rel="stylesheet" href="css/style.css" type="text/css">
    <link href="https://fonts.googleapis.com/css?family=Oswald" rel="stylesheet">
    <title>Mike and Ike Shoes The Best Shoes For Your Foot</title>
</head>
<body>
    <div id="logo_loc">
        <img src="images/MikeAndIkeLogo.png" alt="">
        <h1>Select Your Location</h1>
    </div>
    <div id="spanSelect">
    </div>
    <div id="spanLangDesc">
    </div>
    <div id="movingLine">
    </div>
    <hr id="noDisplay">
    <div id="countriesHolder">
    </div>
</body>
<script src="js/mikeIkeLang.js"></script>
</html>
```

Style.css

```
*{
    margin:0px;
    padding:0px;
```

```
background-color: rgb(255, 255, 255);
    box-sizing: border-box;
p,h1{
    font-family: 'Oswald', sans-serif;
    font-weight: 900;
    letter-spacing:1px;
h1{
    font-size:45px;
a{
    text-decoration: none;
    font-family: 'Oswald', sans-serif;
    color:black;
#logo_loc{
    width:100%;
    height:150px;
    margin-top:120px;
    text-align: center;
#logo_loc img{
    width:130px;
#spanSelect{
    width:100%;
    height:100px;
    text-align: center;
.spanLanguage{
    position: relative;
    min-width:95px;
    height:95px;
    padding: 0;
    margin: 0 2.3%;
    display: inline-block;
    cursor: pointer;
    text-align:center;
    background-repeat:no-repeat;
    border:1.4px solid rgb(197, 197, 197);
    background-image:url("../images/WorldSprite.png");
```

```
.spanLanguage p{
    margin-top: 130px;
.is AmericaN{
 background-position: -10px -10px;
.is_Europe{
    background-position: -15px -100px;
.is_Africa{
    background-position: -133px -100px;
.is_AmericaS{
    background-position: -145px -5px;
.is_Asia{
    background-position: -260px -7px;
.is_Australia{
    background-position: -260px -117px;
#countriesHolder{
    width:100%;
    height:300px;
#movingLine{
    position:relative;
    width:100px;
    border-top:2px solid black;
    margin-bottom:-1.8px;
    opacity:0;
#countriesHolder{
    width:70%;
    margin:20px auto;
#countrySet{
    display:flex;
    list-style-type: none;
```

```
#countriesHolder li{
    padding:20px;
#spanLangDesc{
    width:75%;
    height:75px;
    text-align: center;
    margin:0 auto;
#spanLangDesc p{
    display: inline-flex;
    margin: 30px 73px;
#noDisplay{
    display: flex;
    width:89%;
    opacity:0;
    margin:0 auto;
    border: 1px solid rgb(231, 231, 231);
.descRow{
    display:flex
.products img{
    height:100%;
    width:20%;
```

mikeLang.js

```
var spanInto = document.getElementById("spanSelect");
var regionDesc = ["North America", "Europe", "Africa", "South America", "Asia",
"Australia"]; //Self descriptive
var is_country = ["is_AmericaN", "is_Europe", "is_Africa", "is_AmericaS",
"is_Asia", "is_Australia"];//For map position
var countryClass = document.getElementsByClassName("spanLanguage");// For making
of a span class
//Array groups for languages
```

```
var AmericaNorth = ["United States", "America Latina", "Canada", "Mexico",
"Puerto Rico"];
var Europe = ["BELGIUM", "BULGARIA", "ČESKÁ", "SERBIA", "DANMARK", "DEUTSCHLAND",
"ΕΛΛΑΔΑ", "ESPAÑA", "FINLAND", "FRANCE", "IRELAND", "ISRAEL", "ITALIA"];
var Africa = ["Aegiptus", "Morroco", "Tunisia", "Rest of Africa"];
var AmericaSouth = ["Argentina", "Uruguay", "Chile", "Brasil", "America Latina"];
var Asia = ["中国大陆", "台灣", "日本", "대한민국", "ประเทศไทย", "India"];
var Australia = ["Australia", "New Zealand"];
var northA = document.getElementsByClassName("northAmericaClass");
//End of array group
for(i=0; i<6; i++) //To make 6 span tags</pre>
    var spanMake = document.createElement("SPAN");
    spanMake.className += "spanLanguage" + " " + is_country[i]; //Adds another
the is <country name> to place the coordinates
    spanInto.appendChild(spanMake);
for(i=0; i< countryClass.length; i++){</pre>
    countryClass[i].innerHTML += "" + regionDesc[i] + ""; // These are the
regions below the world map
    countryClass[i].setAttribute("data-country-name", regionDesc[i]);
    countryClass[i].addEventListener("click", forHrAndOther); //Event listener
for hr tag and the other language groups
    //Which will be used to prompt the user to a site, but depending on what
group the user chose some things, words or images
    //will be different
function forHrAndOther(event){
    var hrDisplay = document.getElementsByTagName("HR")[0];
   hrDisplay.style.transition = "opacity .3s linear"; //I made a naming mistake
here, the noDisplay has attributes to display the tag not delete it//
    hrDisplay.style.opacity = "1";
    var checkup = event.target;
   var countryName = checkup.getAttribute("data-country-name");
   var countrySet = document.getElementById("countrySet");
    var movingLine = document.getElementById("movingLine");
   var northA = document.getElementsByClassName("northAmericaClass");
   countrySet.innerHTML = "";
   movingLine.style.opacity = "1";
   if(countryName === "North America"){
        for(i=0; i< AmericaNorth.length; i++){</pre>
```

```
countrySet.innerHTML += "<a class=\"northAmericaClass\" href =</pre>
\"index.html\">" + AmericaNorth[i] + "</a>"; //note the space here, dora the
explorer says it's usefull
            northA[i].setAttribute("data-states", AmericaNorth[i]);
        for(i=0; i<countryClass.length;i++){</pre>
            countryClass[i].style.border = "1px solid rgb(197, 197, 197)";
        checkup.style.border = "2px solid black";
        movingLine.style.transition = "left .5s linear";
        movingLine.style.left = "446px";
    else if(countryName === "Europe"){
        for(i=0; i < Europe.length; i++){</pre>
            countrySet.innerHTML += "<a class=\"northAmericaClass\" href =</pre>
\"index.html\">" + Europe[i] + "</a>";
            northA[i].setAttribute("data-states", Europe[i]);
        for(i=0; i<countryClass.length;i++){</pre>
            countryClass[i].style.border = "1px solid rgb(197, 197, 197)";
        checkup.style.border = "2px solid black";
        movingLine.style.transition = "left .5s linear";
        movingLine.style.left = "630px";
    else if(countryName === "Africa"){
        for(i=0; i < Africa.length; i++){</pre>
            countrySet.innerHTML += "<a class=\"northAmericaClass\" href =</pre>
\"index.html\">" + Africa[i] + "</a>";
            northA[i].setAttribute("data-states", Africa[i]);
        for(i=0; i<countryClass.length;i++){</pre>
            countryClass[i].style.border = "1px solid rgb(197, 197, 197)";
        checkup.style.border = "2px solid black";
        movingLine.style.transition = "left .5s linear";
        movingLine.style.left = "816px";
    else if(countryName === "South America"){
        for(i=0; i < AmericaSouth.length; i++){</pre>
            countrySet.innerHTML += "<a class=\"northAmericaClass\" href =</pre>
\"index.html\">" + AmericaSouth[i] + "</a>";
            northA[i].setAttribute("data-states", AmericaSouth[i]);
        for(i=0; i<countryClass.length;i++){</pre>
```

```
countryClass[i].style.border = "1px solid rgb(197, 197, 197)";
       checkup.style.border = "2px solid black";
       movingLine.style.transition = "left .5s linear";
       movingLine.style.left = "1002px";
   else if(countryName === "Asia"){
       for(i=0; i < Asia.length; i++){</pre>
            countrySet.innerHTML += "<a class=\"northAmericaClass\" href =</pre>
\"index.html\">" + Asia[i] + "</a>";
           northA[i].setAttribute("data-states", Asia[i]);
       for(i=0; i<countryClass.length;i++){</pre>
            countryClass[i].style.border = "1px solid rgb(197, 197, 197)";
       checkup.style.border = "2px solid black";
       movingLine.style.transition = "left .5s linear";
       movingLine.style.left = "1190px";
   else if(countryName === "Australia"){
       for(i=0; i < Australia.length; i++){</pre>
            countrySet.innerHTML += "<a class=\"northAmericaClass\" href =</pre>
\"index.html\">" + Australia[i] + "</a>";
            northA[i].setAttribute("data-states", Australia[i]);
       for(i=0; i<countryClass.length;i++){</pre>
            countryClass[i].style.border = "1px solid rgb(197, 197, 197)";
       checkup.style.border = "2px solid black";
       movingLine.style.transition = "left .5s linear";
       movingLine.style.left = "1376px";
   //Cookie setting and probabble overriding, hope so//
   function LocalMemory(event){
      var getInfo = event.currentTarget.getAttribute("data-states");
      localStorage.setItem("state", getInfo)
   for(i=0; i< northA.length; i++){</pre>
       northA[i].addEventListener("click", LocalMemory);
   }
```

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta http-equiv="X-UA-Compatible" content="ie=edge">
src="https://ajax.googleapis.com/ajax/libs/jquery/3.3.1/jquery.min.js"></script>
    <link rel="stylesheet"</pre>
href="https://use.fontawesome.com/releases/v5.6.3/css/all.css" integrity="sha384-
UHRtZLI+pbxtHCWp1t77Bi1L4ZtiqrqD80Kn4Z8NTSRyMA2Fd33n5dQ81WUE00s/"
crossorigin="anonymous">
    <link rel="icon" href="images/MikeAndIke.png">
    <link href="https://fonts.googleapis.com/css?family=0swald" rel="stylesheet">
    <link rel="stylesheet" href="css/styleForIndex.css" type="text/css">
    <title>Mike. Just boo it. Ike.com</title>
</head>
<body>
   <div id="headerBase">
       <div id="ulHolder">
       <u1>
           Nike +
           Jordan
           Hurley
           Converse
       </div>
    <div id="otherInfo">
       <a id="storageClear" href="hikeLangSelect.html">Language
Choice</a>
    </div>
   </div>
    <div id="headerUse">
       <a href="index.html"><img src="images/testLogo.png" alt="logoImage"/></a>
        <h1>Welcome To M&H Shoes</h1>
    </div>
    <div id="aboutCreator">
        <h1>About The Creator</h1>
       <img src="images/f1.png" alt="creator">
        My name is Aleksandar Marjanovic and i made this site as a project for
the ICT uni, IT course, Web Programming subject. This is my official third or
fourth site, made by using vanila javascript, jquery, css and html, which you can
all see in the documentation. The first contact with HTML and CSS was 3 years ago
when i worked on a World Of Warcraft emulation. Long time has passed since then
but the passion stays the same, appart from programming my passion is gaming and
```

```
basketball, and i tend to keep up with both, now with added content it's a bit
harder.Around 30% of the Terms of Service, which in it's original is on this
site, and on the vallhala-realms.com respectively is made by me, and i keep that
as a small token of my humble begining as a web developer and a token of
appreciation to the people in vallhala realms. Aside from programming i am into
basketball and the only thing i can't allow myself to be out of shape. I was born
in Belgrade, Serbia, and i currently live in Obrenovac.
    </div>
    <footer id="footerBase">
        <div id="middleContent">
            <div id="contentHolder">
            <div id="biggerPart">
            </div>
            <div id="smallerOne">
                    <a href="https://twitter.com/nike"><i class="fab fa-</pre>
twitter"></i></a>
                    <a href="https://www.facebook.com/"> <i class="fab fa-
facebook-square"></i></a>
                    <a href="https://www.youtube.com/"><i class="fab fa-</pre>
youtube"></i></a>
                   <a href="https://www.instagram.com/"><i class="fab fa-</pre>
instagram"></i></a>
            </div>
        </div>
        <div id="bottomContent">
            <div id="leftSide">
                Language not chosen
            </div>
            <div id="rightSide">
                <a href="#">Sitemap</a>
                <a href="about.html">About the Maker</a>
                <a href="documentation.pdf">Documentation</a>
            </div>
            </div>
        </div>
    </footer>
</body>
<script src="js/about.js"></script>
</html>
```


About.js, samo zbog futera I local storage-a

```
var classHolder = document.getElementById("biggerPart");
for(i=0; i<3; i++){</pre>
```

```
var newClasses = document.createElement("DIV");
    newClasses.className += "letterContent";
    classHolder.appendChild(newClasses);
var firstClass = ["GIFT CARDS","FIND A STORE","SIGN UP FOR EMAIL","BECOME A
MEMBER", "STUDENT DISCOUNT", "SITE FEEDBACK"];
var classGet = document.getElementsByClassName("letterContent");
for(i=0; i<firstClass.length; i++){</pre>
    classGet[0].innerHTML += "" + firstClass[i] + "";
var secondClass = ["ABOUT NIKE","News","Careers","Investors","Sustainable
Innovation", "UK Tax"];
for(i=0; i<secondClass.length; i++){</pre>
    classGet[1].innerHTML += "" + secondClass[i] + "";
var thirdClass = ["GET HELP", "Shipping and Delivery", "ReturnsPayment",
for(i=0; i<thirdClass.length; i++){</pre>
    classGet[2].innerHTML += "" + thirdClass[i] + "";
if(localGetter === "Rest of Africa"){
    document.title = "Hike Official Central Africa";
    localHolder.innerHTML = "You are from Central Africa";
else{
    for(state in allStates){
        if(localGetter == allStates[state]){
            localHolder.innerHTML = "You are from " + localGetter;
            document.title = "Mike and Hike " + localGetter;
            break;
```

2. Organizacija

2.1 Sema organizacije

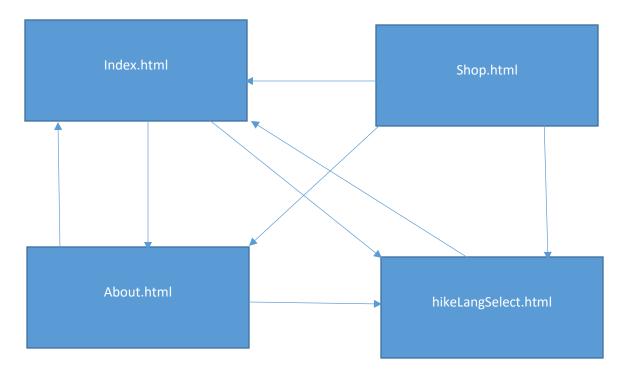

2.2 Sitemap

```
<?xml version="1.0" encoding="UTF-8"?>
<urlset xmlns="http://www.sitemaps.org/schemas/sitemap/0.9">
      <url>
       <loc>https://thehandofking.github.io/HikeShoes/index.html</loc>
       <lastmod>2018-12-22
       <changefreq>daily</changefreq>
       <priority>0.9</priority>
      </url>
      <url>
       <loc>https://thehandofking.github.io/HikeShoes/about.html</loc>
       <lastmod>2018-12-22
       <changefreq>daily</changefreq>
       <priority>0.1</priority>
      </url>
      <url>
        <url>
       <loc>https://thehandofking.github.io/HikeShoes/hikeLangSelect.html</loc>
```