


Moongiant Conky Script

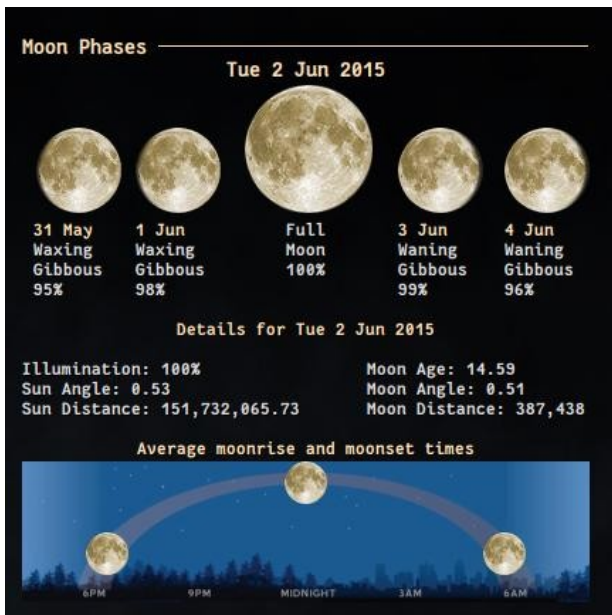

It uses the site

<http://www.moongiant.com/>

Navigate inside the script's folder and open the script (moongiant) with your favourite editor. Replace the variable hemisphere with whatever applies to your place, ie. northern (north) or southern (south).

Make the script executable:
Either by right clicking it or by

```
chmod +x ~/Moongiant_conky_script/moongiant
```

The script uses the `kill` command to pause (and then, of course, resume) **ONLY** the particular conky instance that uses it while downloading the necessary info, so that there is enough time for all the files to be populated before conky tries to use them, thus avoiding an empty desktop. It therefore needs the conky command that launches the conky configuration file that calls the Moongiant script; you should put this command at the `weather_conky_launch_command` variable:

```
weather_conky_launch_command="conky -b"
```

or

```
weather_conky_launch_command="conky -c /home/myusername/myweatherconky"
```

etc.

I've included two .conkyrc files with the script. You can intergrate them into your own .conkyrc file or run them individually with

```
conky -c /path/.conkyrc_Moon_S11_V1
```

or

```
conky -c /path/.conkyrc_Moon_S11_V2
```

The script downloads a lot of stuff - feel free to subtract.