

Chap: 5

MARKING UP TEXT

Lecture 5

Quiz 1

- Tuesday 3rd October
- Lectures 1-5
- Written
- MCQs and write the html code/determine the output of HTML code
- ~30 minutes

Page Organizing Elements

HTML5 introduced elements that give meaning to the typical sections of a web page:

- `main`
- `header`
- `footer`
- `section`
- `article`
- `aside`
- `nav`

Main Content

`<main> </main>`

- Identifies the primary content of a page or application
- Helps users with screen readers get to the main content of the page
- The content inside the `<main>` element should be unique to the document. It should not contain any content that is repeated across documents such as sidebars, navigation links, copyright information, site logos, and search forms.
- There must not be more than one `<main>` element in a document.

Main Content

`<main> </main>`

`<body>`

`<main>`

`<h1>Humanist Sans Serif</h1>`

`...content continues...`

`</main>`

`</body>`

Headers and Footers

`<header> </header>`

`<footer> </footer>`

The `<header>` tag in HTML is used to define the header for a document or a section as it contains the information related to the title and heading of the related content.

header identifies the introductory material that comes at the beginning of a page, section, or article (logo, title, navigation, etc.).

footer indicates the type of information that comes at the end of a page, section, or article (author, copyright, etc.)

Headers and Footers (cont'd)

```
<article>
  <header>
    <h1>More about WOFF</h1>
    <p>by Jennifer Robbins, <timedatettime="2017-11-11">
      November 11, 2017</time></p>
  </header>
  <!-- ARTICLE CONTENT HERE -->

  <footer>
    <p><small>Copyright &copy;2017 Jennifer
Robbins.</small></p>
    <nav>
      <ul>
        <li><a href="/">Previous</a></li>
        <li><a href="/">Next</a></li>
      </ul>
    </nav>
  </footer>
</article>
```

Sections

`<section> </section>`

section identifies thematic section of a page or an article. It can be used to divide up a whole page or a single article:

`<section>`

```
<h2>Typography Books</h2>
```

```
<ul>
```

```
<li>...</li>
```

```
</ul>
```

`</section>`

`<section>`

```
<h2>Online Tutorials</h2>
```

```
<p>These are the best tutorials on the Web.</p>
```

```
<ul>
```

```
<li>...</li>
```

```
</ul>
```

`</section>`

Articles

`<article> </article>`

`<article>` is independent piece of content.

`<article>` element is content that makes sense on its own.

The key point here is that the content has to make sense independent of its context

It is normally used in:

- Blog post
- Forum post
- News story
- Comment

Articles

`<article> </article>`

```
<!DOCTYPE html>
<html>
<body>
<article>
  <img src ="computer.jpg">
  <h1> Computer </h1>
  <p> A computer is a machine that can be
programmed to carry out sequences of
arithmetic or logical operations
automatically. Modern digital electronic
computers can perform generic sets of
operations known as programs. These programs
enable computers to perform a wide range of
tasks. </p>
</article>
</body>
</html>
```

Aside (Sidebar)

`<aside> </aside>`

The `<aside>` tag is used to describe the main object of the web page in a shorter way like a highlighter.

Aside identifies content that is separate from but tangentially related to the surrounding content (think of it as a sidebar).

`<aside>` tag is used to represent content that is related to the surrounding content within an article or web page.

This type of content is often represented in sidebars.

Aside (Sidebar)

<aside> </aside>

```
<h1>Web Typography</h1>
<p>Back in 1997, there were competing font formats and tools
for making them...</p>
<p>We now have a number of methods for using beautiful fonts
on web pages...</p>
```

<aside>

```
<h2>Web Font Resources</h2>
<ul>
<li><a href="http://typekit.com/">Typekit</a></li>
<li><a href="http://fonts.google.com">Google Fonts</a></li>
</ul>
```

</aside>

Navigation

`<nav> </nav>`

The `<nav>` HTML element represents a section of a page whose purpose is to provide navigation links, either within the current document or to other documents. Common examples of navigation sections are menus, tables of contents, and indexes.

nav identifies the primary navigation for a site or lengthy section or article. It provides more semantic meaning than a simple unordered list.

Navigation

`<nav> </nav>`

`<nav>`

`<ul>`

`<li><a href="/">Serif</a></li>`

`<li><a href="/">Sans-serif</a></li>`

`<li><a href="/">Script</a></li>`

`<li><a href="/">Display</a></li>`

`<li><a href="/">Dingbats</a></li>`

`</ul>`

`</nav>`

Inline Elements

- Inline elements display in a line. They do not force the text after them to a new line. An anchor (or link) is an example of an inline element.
- Called **text-level semantic elements** in the spec.
- Describe the types of elements that appear in the flow of text.

Inline Elements

<code>a</code>	<code>dfn</code>	<code>time</code>	<code>small</code>
<code>em</code>	<code>code</code>	<code>ins/del</code>	<code>data</code>
<code>strong</code>	<code>var</code>	<code>b</code>	<code>span</code>
<code>q</code>	<code>samp</code>	<code>i</code>	
<code>abbr</code>	<code>kbd</code>	<code>s</code>	
<code>cite</code>	<code>sub/sup</code>	<code>u</code>	

Inline Elements

Emphasis

`<em> </em>`

Text that should be emphasized. Usually displayed in italics.

```
<p><em>Arlo</em> is very smart.</p>
```

```
<p>Arlo is <em>very</em> smart.</p>
```

`<strong></strong>`

Text that is important, serious, or urgent. Usually displayed in bold.

```
<p>When returning the car, <strong>drop the keys in the  
red box by the front desk</strong>.</p>
```

TIP: Use these elements semantically, not to achieve font styles. Think of how it would be read with a screen reader.

Short Quotations

`<q> </q>`

For quoted phrases in the flow of text. Browsers add appropriate quotation marks automatically.

```
<p>Matthew Carter says, <q>Our alphabet hasn't changed in  
eons.</q></p>
```

Matthew Carter says, "Our alphabet hasn't changed in eons."

Abbreviations and Acronyms

`<abbr> </abbr>`

The **title** attribute provides the long version of a shortened term, which is helpful for search engines and assistive devices.

```
<abbr title="Points">pts.</abbr>
```

```
<abbr title="American Type Founders">ATF</abbr>
```

Superscript and Subscript

`<sup>` `</sup>`

`<sub>` `</sub>`

Causes the selected text to display in a smaller size and slightly above (**sup**) or below (**sub**) the baseline.

`<p>H<sub>2</sub>O</p>`

`<p>E=MC<sup>2</sup></p>`

H₂O

E=MC²

Inline Elements

Citations

`<cite> </cite>`

Identifies a reference to another document.

```
<p>Passages of this article were inspired by <cite>The  
Complete Manual of Typography</cite> by James Felici.</p>
```

Defining Terms

`<dfn> </dfn>`

The `<dfn>` tag stands for the "definition element", and it specifies a term that is going to be defined within the content. The nearest parent of the `<dfn>` tag must also contain the definition/explanation for the term..

```
<p><dfn>Script typefaces</dfn> are based on handwriting.</p>
```

Code-Related Elements

`<code>` `</code>` Code in the flow of text

`<var>` `</var>` Variables (The `<var>` tag is used to defines a variable in programming or in a mathematical expression.)

`<samp>` `</samp>` Program sample/ sample output

`<kbd>` `</kbd>` User-entered keyboard strokes

New Semantic Definitions for Old Presentational Inline Elements

** ** Phrases that need to stand out without added emphasis or importance (*bold*)

<i> </i> Phrases in a different voice or mood than the surrounding text (*italic*)

<s> </s> Text that is incorrect (*strike-through*)

<u> </u> Underlined text, when underlining has semantic purpose

<small> </small> Addendum or side note (*smaller text size*)

Inline Elements

Highlighted Text

`<mark> </mark>`

For phrases that may be particularly relevant to the reader, it highlight values when displaying search results:

```
<p> ... PART I. ADMINISTRATION OF THE GOVERNMENT. TITLE IX.  
TAXATION. CHAPTER 65C. MASS. <mark>ESTATE TAX</mark>. Chapter  
65C: Sect. 2. Computation of <mark>estate tax</mark>.</p>
```


... PART I. ADMINISTRATION OF THE GOVERNMENT. TITLE IX.
TAXATION. CHAPTER 65C. MASS. **ESTATE TAX**. Chapter 65C: Sect. 2.
Computation of **estate tax**.

Dates and Times

`<time> </time>`

Provides machine-readable equivalents for dates and times.
The **datetime** attribute specifies the date/time information in a standardized time format:

`<time datetime="1970-09-05T01:11:00">Sept.5, 1970,
1:11a.m.</time>`

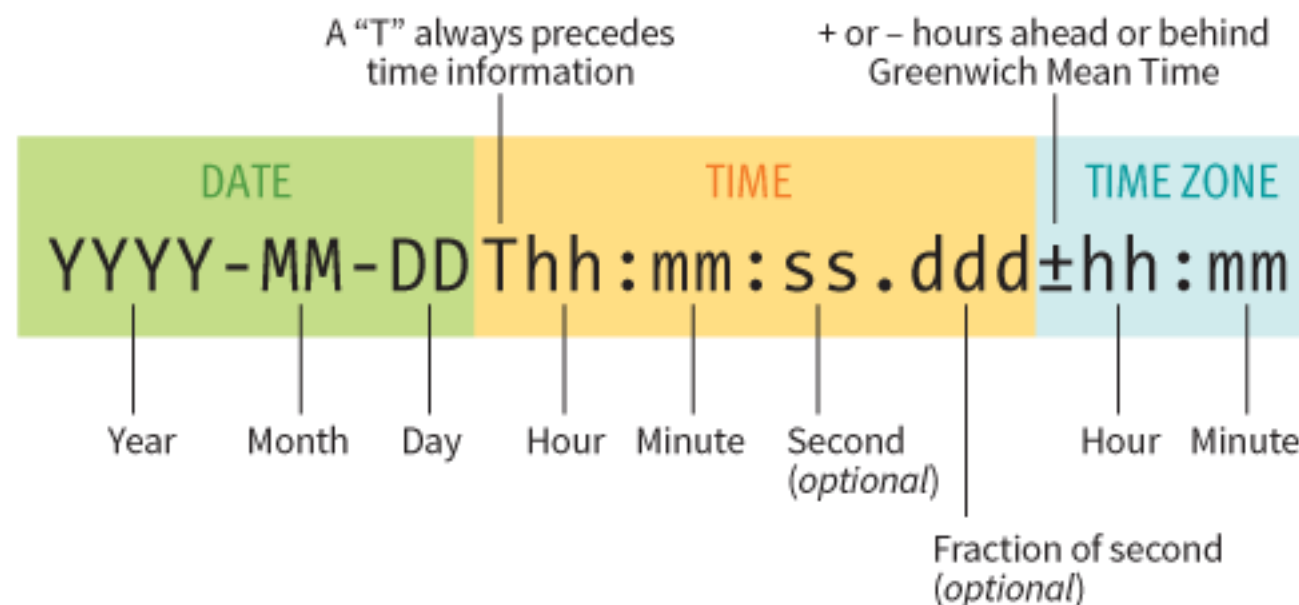

Attribute Values

Value	Description
<code>YYYY-MM-DDThh:mm:ssTZD</code>	The date and time of when the text was deleted. Explanation of components: • YYYY - year (e.g. 2012) • MM - month (e.g. 01 for January) • DD - day of the month (e.g. 08) • T or a space - a separator (required if time is also specified) • hh - hour (e.g. 22 for 10.00pm) • mm - minutes (e.g. 55) • ss - seconds (e.g. 03) • TZD - Time Zone Designator (Z denotes Zulu, also known as Greenwich Mean Time)

Here are a few examples of valid values for `datetime`:

- Time only: 9:30 p.m.

```
<time datetime="21:30">9:30p.m.</time>
```

- Date only: June 19, 2016

```
<time datetime="2016-06-19">June 19, 2016</time>
```

- Date and time: Sept. 5, 1970, 1:11a.m.

```
<time datetime="1970-09-05T01:11:00">Sept. 5, 1970, 1:11a.m.</time>
```

- Date and time, with time zone information: 8:00am on July 19, 2015, in Providence, RI

```
<time datetime="2015-07-19T08:00:00-05:00">July 19, 2015, 8am,  
Providence RI</time>
```

Inserted and Deleted Content

`<ins> </ins>`

`<del> </del>`

Markup for edits indicating parts of a document that have been inserted or deleted:

Chief Executive Officer: `<del title="retired">`Peter
Pan`</del><ins>`Pippi Longstocking`</ins>`

Generic Elements

`<div> </div>`

Indicates division of content (generally block-level)

`<span> </span>`

Indicates a word or phrase

- Generic elements are given semantic meaning with the `id` and `class` attributes.
- They are useful for creating “hooks” for scripts and style rules.

Div Example

Use the **div** element to create a logical grouping of content or elements on the page.

It indicates that they belong together in some sort of conceptual unit or should be treated as a unit by CSS or JavaScript.

```
<div class="listing">
```

```
  
```

```
  <p><cite>The Complete Manual of Typography</cite>, James  
  Felici</p>
```

```
  <p>A combination of type history and examples of good and  
  bad type design.</p>
```

```
</div>
```

Span Example

The `<span>` tag is an inline container used to mark up a part of a text, or a part of a document

The `<span>` tag is easily styled by CSS or manipulated with JavaScript using the class or id attribute

The `<span>` tag is much like the `<div>` element, but `<div>` is a block-level element and `<span>` is an inline element

```
<p>My mother has <span style="color:blue">blue</span> eyes.</p>
```