


5

MARKING UP TEXT

OVERVIEW

- **General block elements**
- **Breaks**
- **Lists**

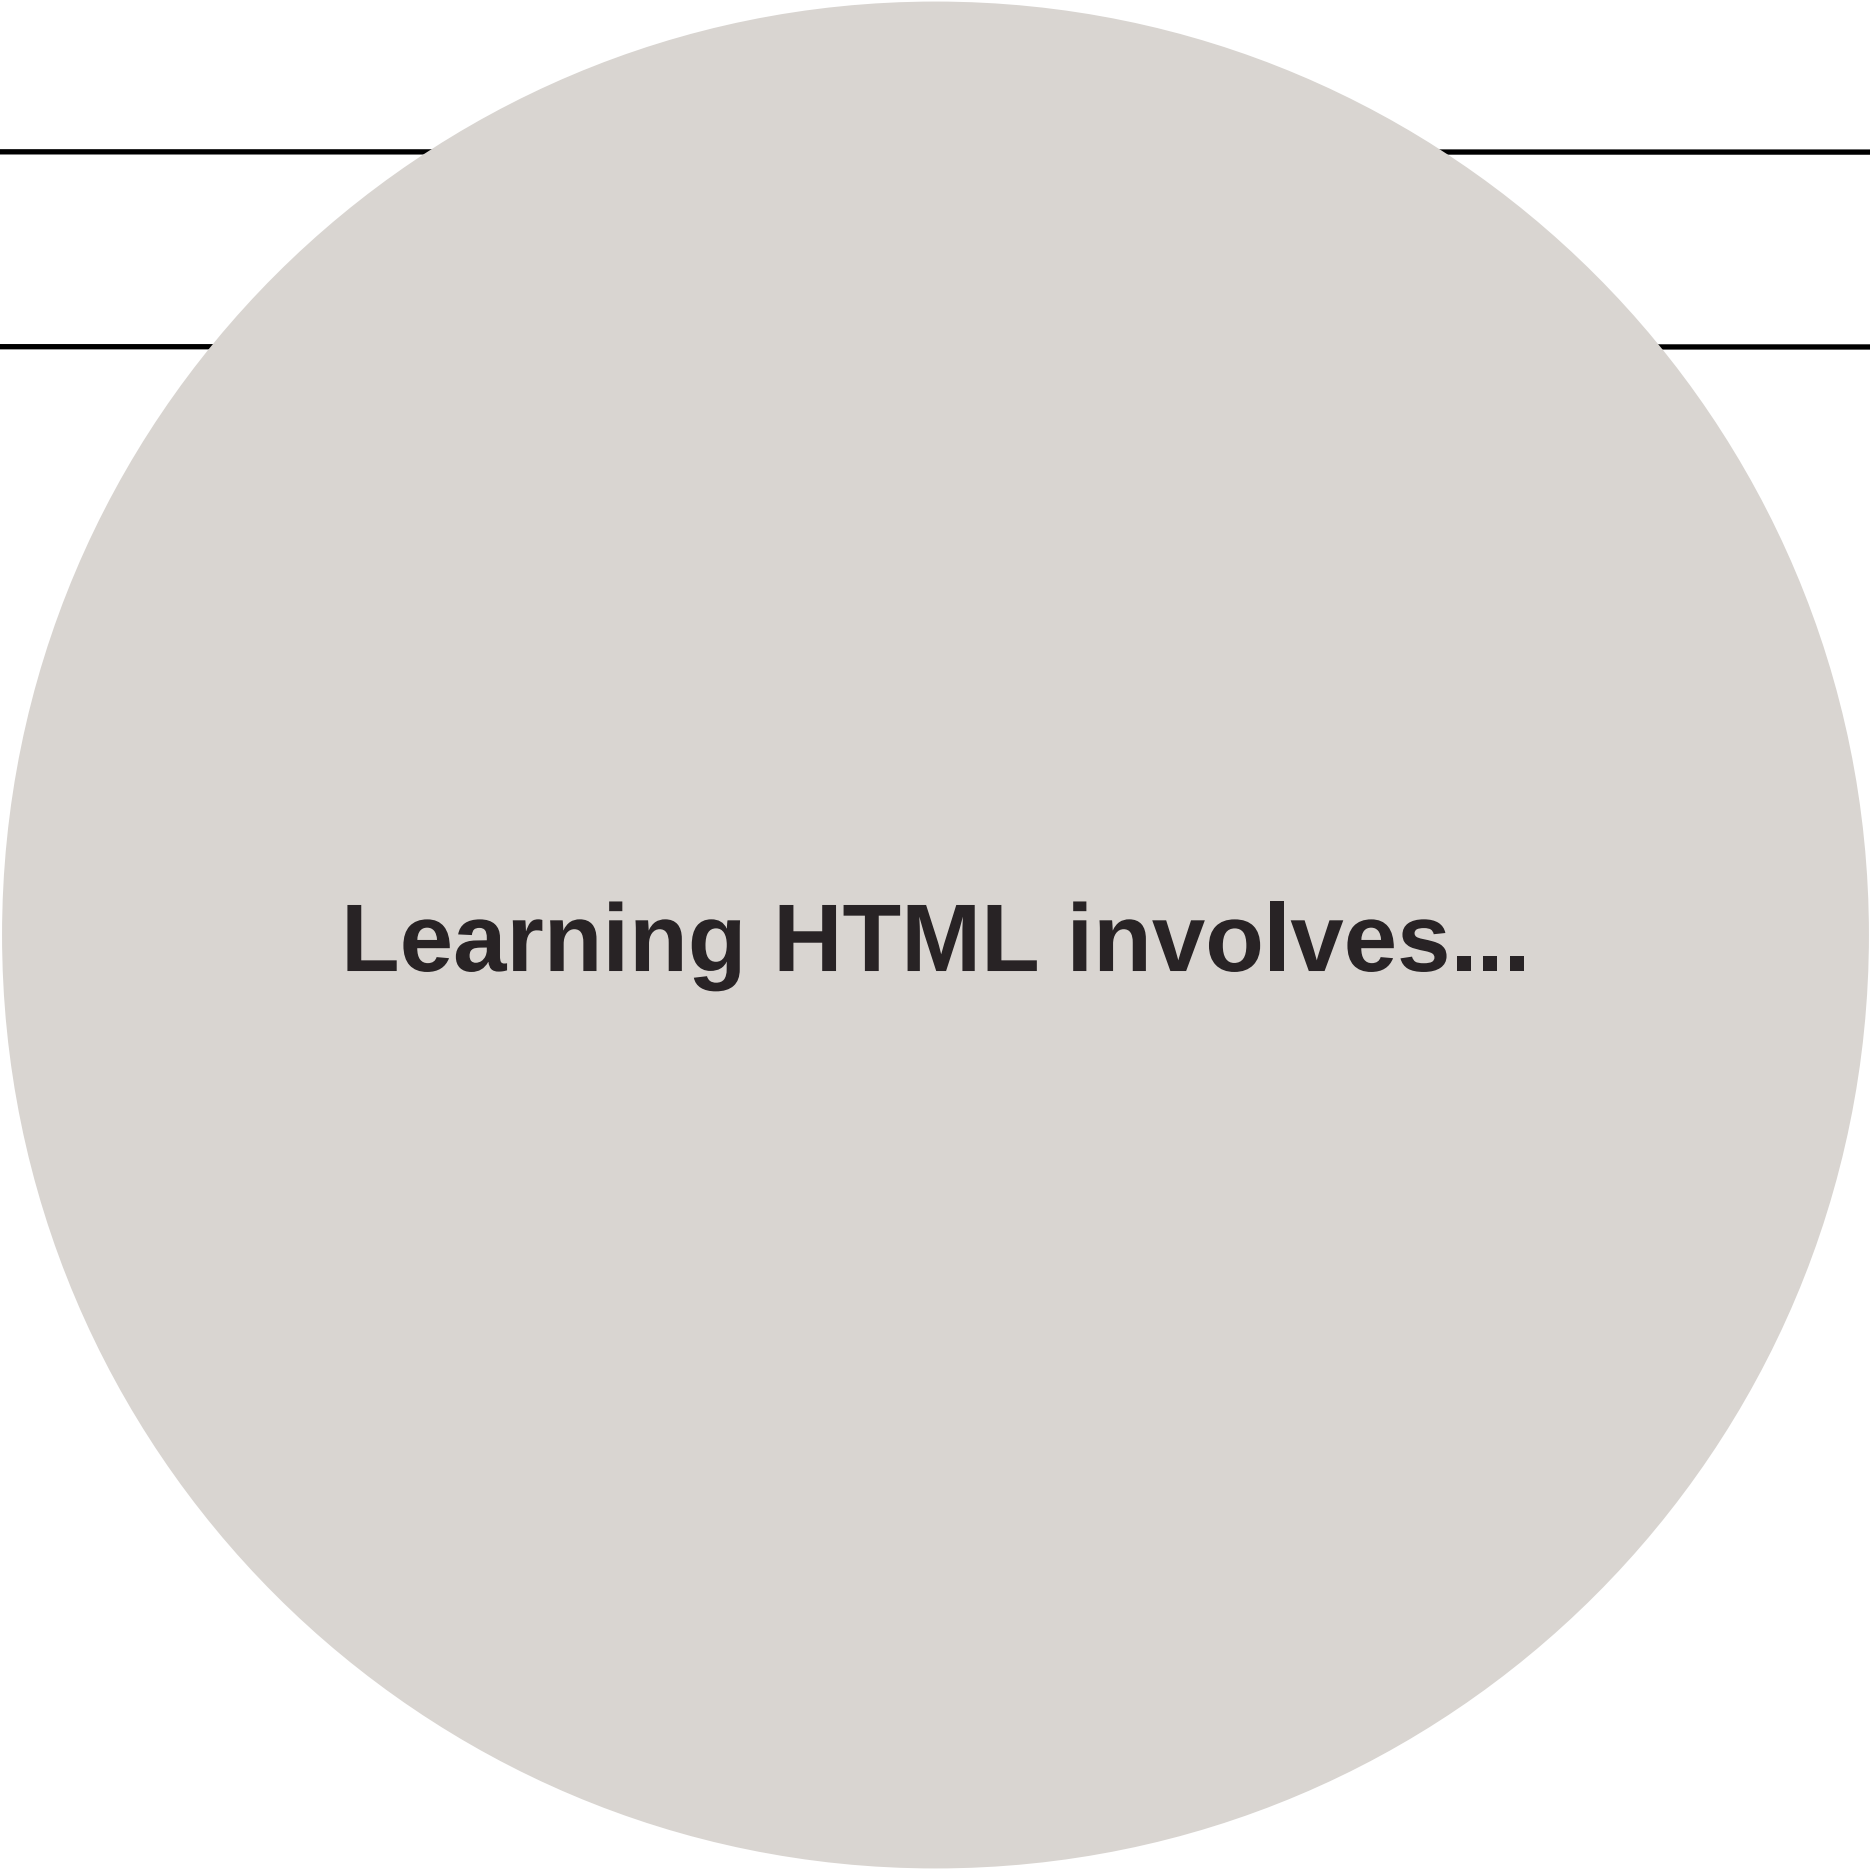

Learning HTML involves...

OVERVIEW




**Learning a list
of elements**




**Learning how
these elements
are used**

TAGS DESCRIBE CONTENT

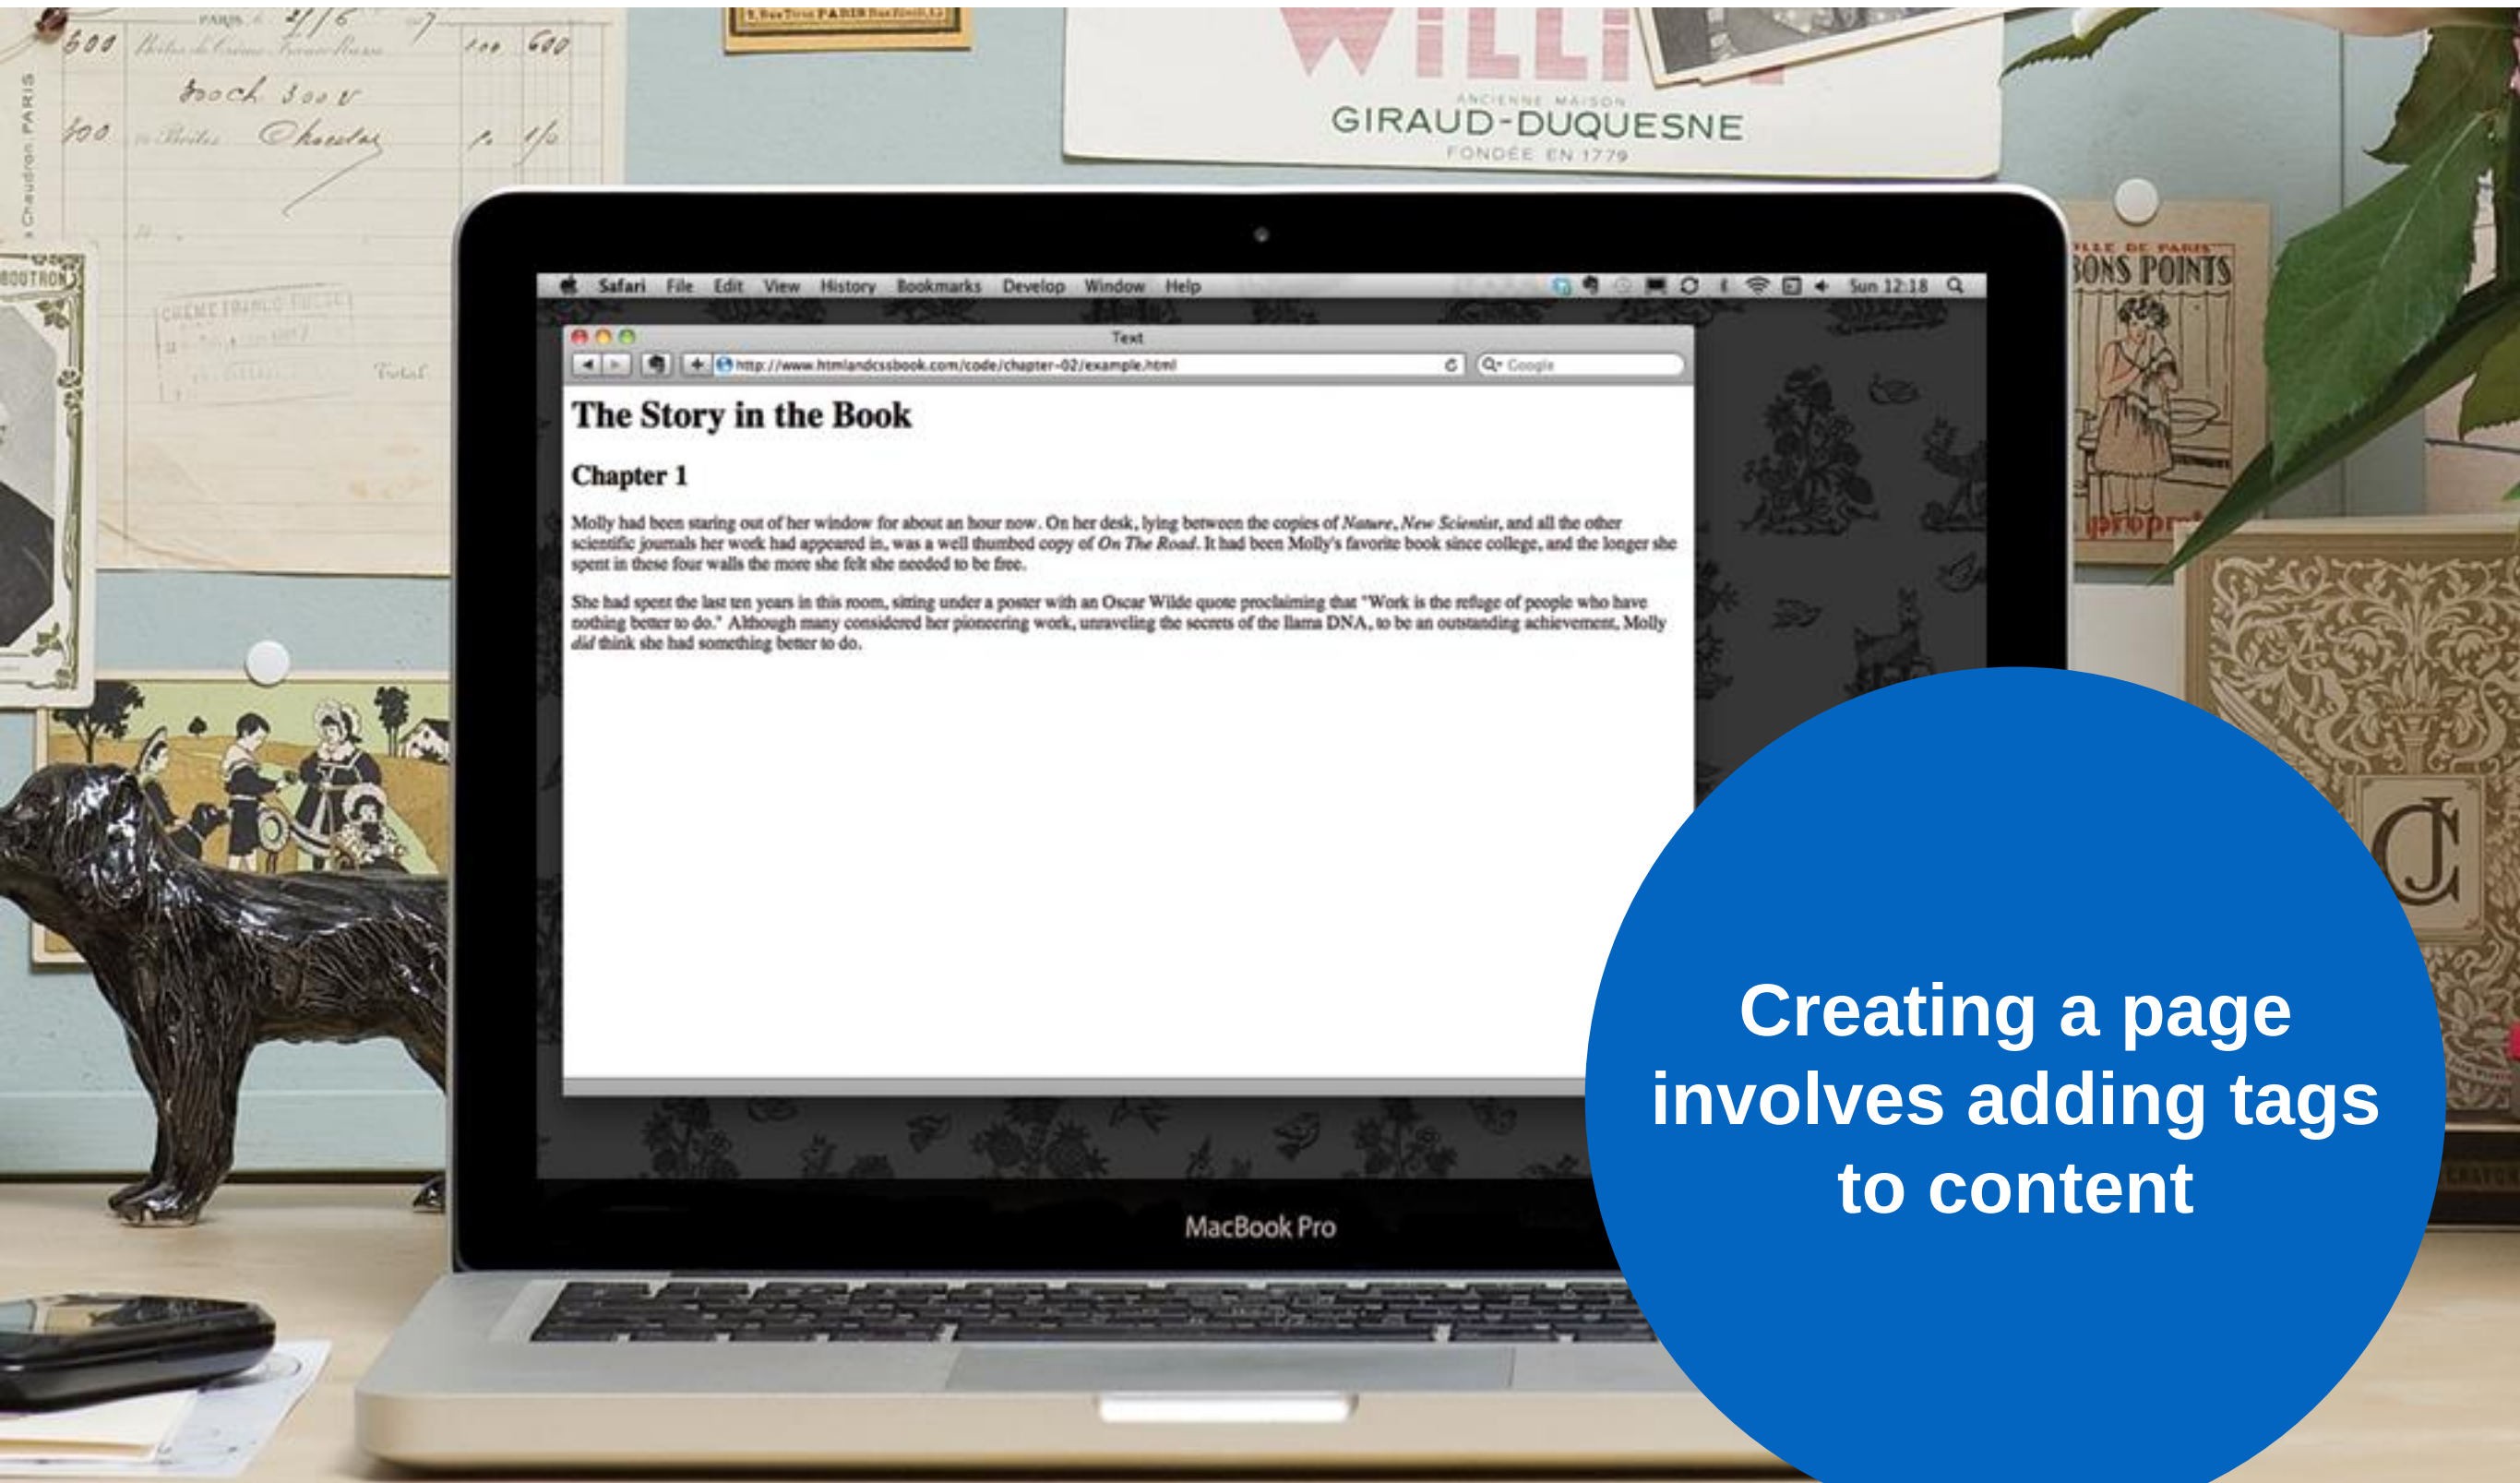


Creating a page
involves adding tags
to content

TAGS DESCRIBE CONTENT

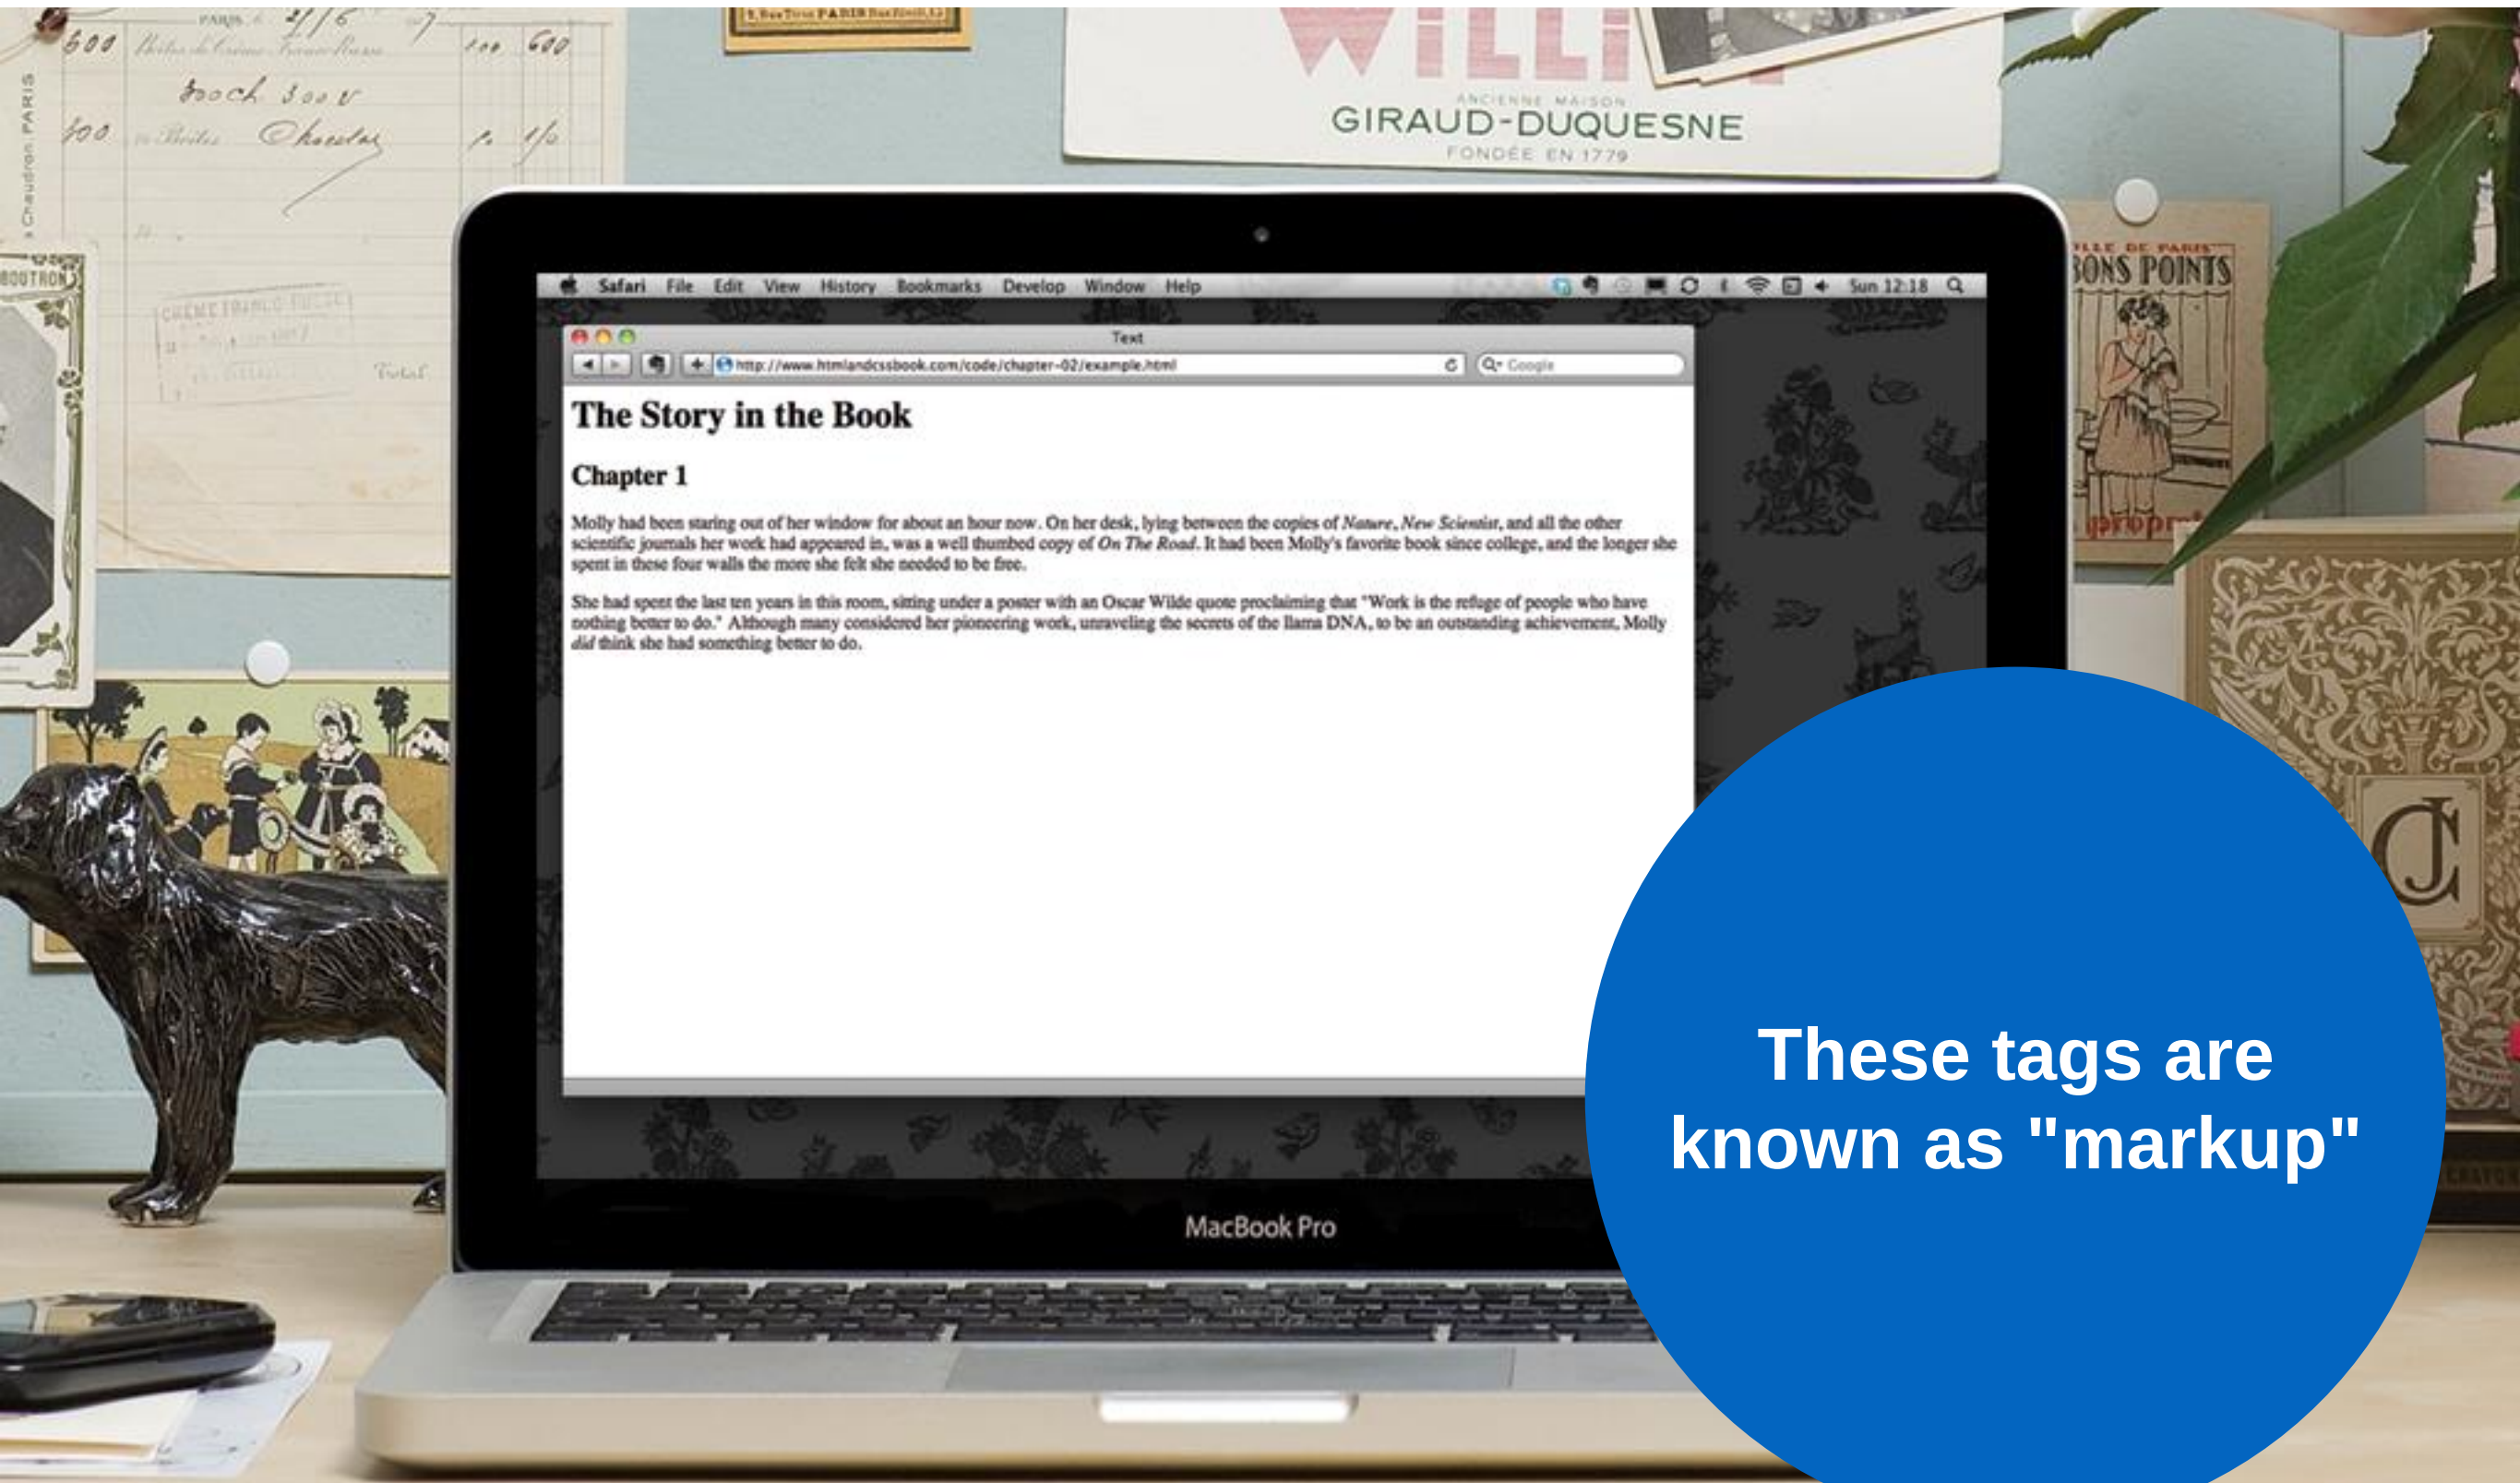


These tags are known as "markup"

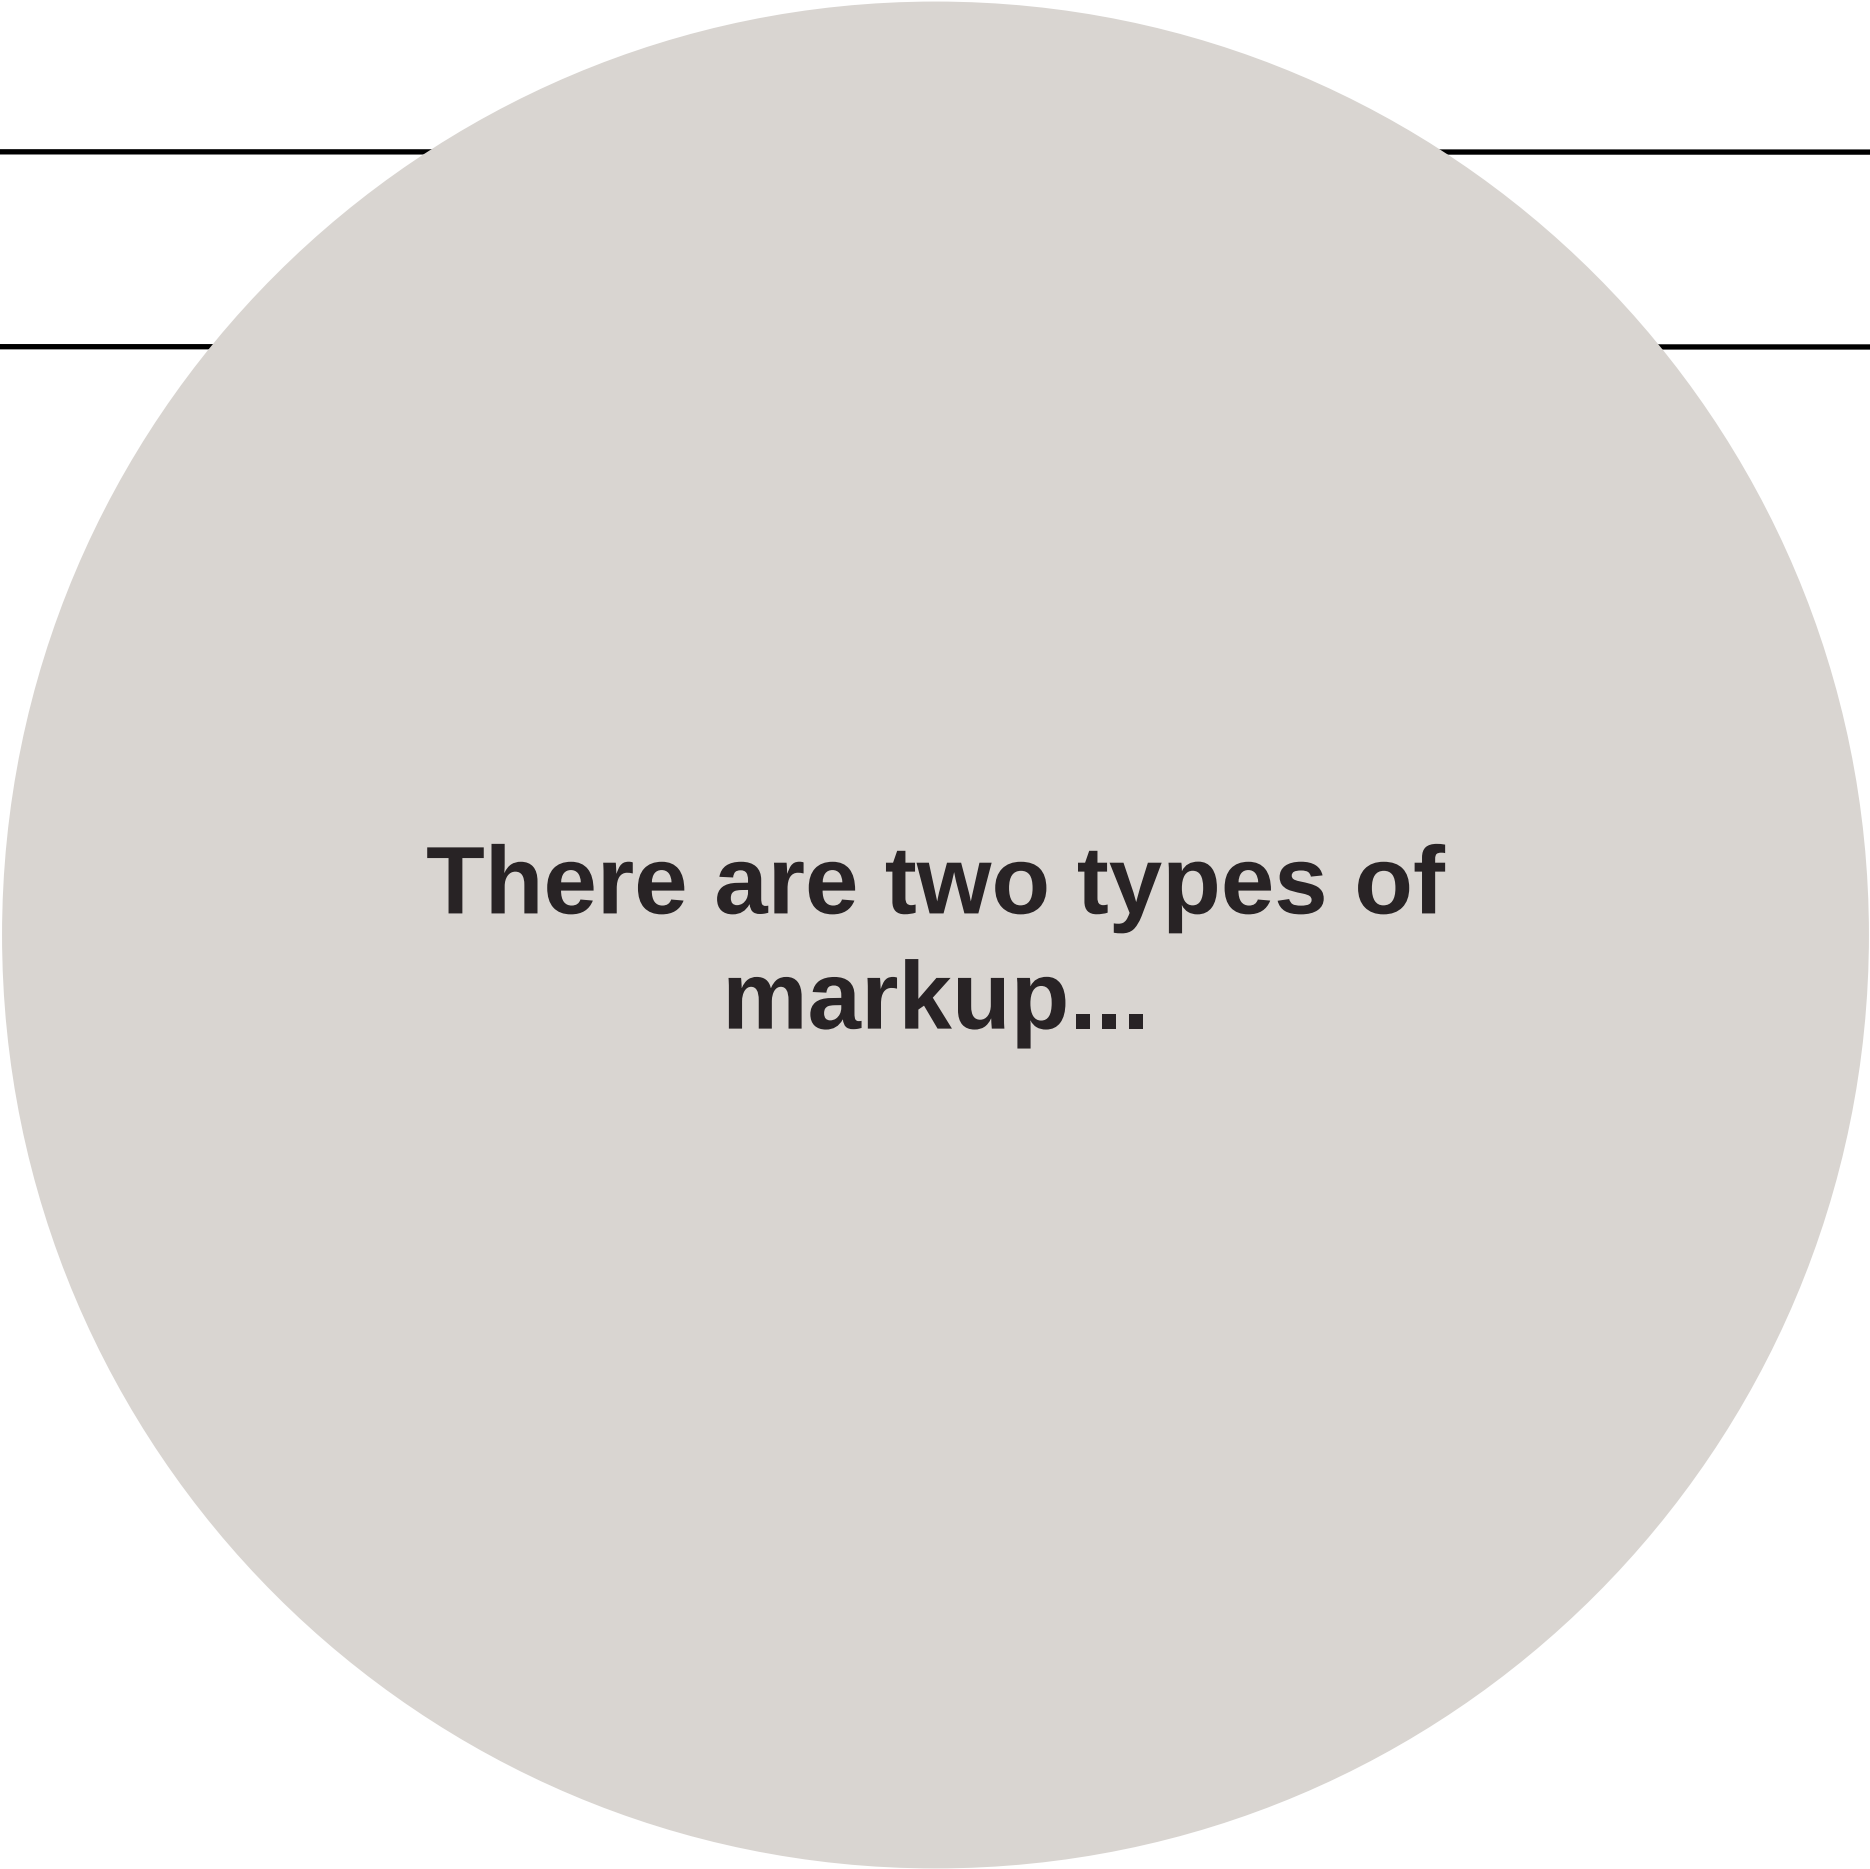

**There are two types of
markup...**

OVERVIEW

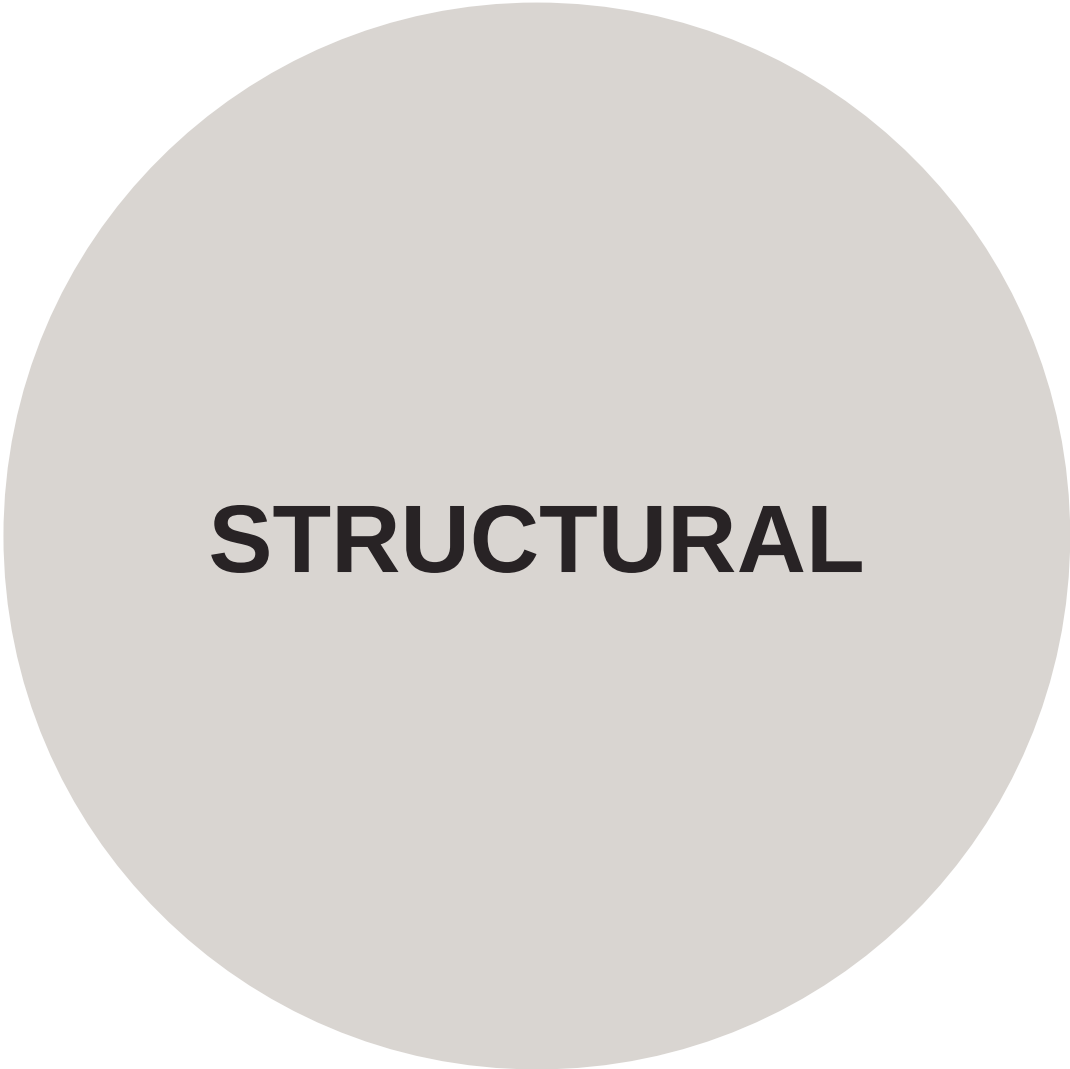

STRUCTURAL



SEMANTIC

STRUCTURAL MARKUP

Structure is the information components within an HTML document. For instance: headings, lists and paragraphs. HTML provides some elements that are strictly "structural" - meaning that they are used to define the structure for a web page, in semantic terms.

Example of Structural Markup

HTML Page Structure

`<!DOCTYPE html>` ← Tells version of HTML

`<html>` ← HTML Root Element

`<head>` ← Used to contain page HTML metadata

`<title>Page Title</title>` ← Title of HTML page

`</head>`

`<body>` ← Hold content of HTML

`<h2>Heading Content</h2>` ← HTML heading tag

`<p>Paragraph Content</p>` ← HTML paragraph tag

`</body>`

`</html>`

SEMANTIC MARKUP

Writing semantic markup means understanding the hierarchy of your content and how both users and machines will read it. Much of it can seem like common-sense; when you write a heading, mark it with a heading tag (`<h1>`, `<h2>`, etc.). When you write a paragraph, mark it with a paragraph tag (`<p>`).

Markup Tips

- It is important to mark up content semantically, in a way that accurately describes the content's meaning or function.
- This ensures your content is accessible in the widest range of viewing environments:
 - Desktop and mobile browsers
 - Assistive reading devices
 - Search engine indexers

Paragraphs

<p> </p>

Paragraphs are the most rudimentary elements in a text document.

<p>Serif typefaces have small slabs at the ends of letter strokes. In general, serif fonts can make large amounts of text easier to read.</p>

<p>Sans-serif fonts do not have serif slabs; their strokes are square on the end. Helvetica and Arial are examples of sans-serif fonts. In general, sans-serif fonts appear sleeker and more modern.</p>

Headings

`<h#> </h#>`

There are six levels of headings (**h1** to **h6**).

`<h1>`Top-Level Heading`</h1>`

`<p>`This is a regular paragraph that will display at the browser's default font size and weight for comparison.`</p>`

`<h2>`Second-Level Heading`</h2>`

`<h3>`Third-Level heading`</h3>`

`<p>`This is another paragraph for comparison. Of course, you can change the presentation of all of these elements with your own style sheets.`</p>`

`<h4>`Fourth Level Heading`</h4>`

`<h5>`Fifth Level Heading`</h5>`

`<h6>`Sixth-Level Heading`</h6>`

`<p>`This is another paragraph to show the default relationship of headings to body paragraphs. Of course, you can change the presentation of all of these elements with your own style sheets.`</p>`

Headings (cont'd)

h1 Top-Level Heading

This is a regular paragraph that will display at the browser's default font size and weight for comparison.

h2 Second-Level Heading

h3 Third-Level heading

This is another paragraph for comparison. Of course, you can change the presentation of all of these elements with your own style sheets.

h4 Fourth Level Heading

h5 Fifth Level Heading

h6 Sixth-Level Heading

This is another paragraph to show the default relationship of headings to body paragraphs. Of course, you can change the presentation of all of these elements with your own style sheets.

Headings (cont'd)

- Used to create the document outline.
- Help with accessibility and search engine indexing.
- Recommended to start with **h1** and add subsequent levels in logical order.
- Don't choose headings based on how they look; use a style sheet to change them.

Long Quotations (blockquote)

`<blockquote> </blockquote>`

`<p>Renowned type designer, Matthew Carter, has this to say about his profession:</p>`

`<blockquote>`

`<p>Our alphabet hasn't changed in eons; there isn't much latitude in what a designer can do with the individual letters.</p>`

`<p>Much like a piece of classical music, the score is written down. It's not something that is tampered with, and yet, each conductor interprets that score differently. There is tension in the interpretation.</p>`

`</blockquote>`

Renowned type designer, Matthew Carter, has this to say about his profession:

Our alphabet hasn't changed in eons; there isn't much latitude in what a designer can do with the individual letters.

Much like a piece of classical music, the score is written down. It's not something that is tampered with, and yet, each conductor interprets that score differently. There is tension in the interpretation.

Preformatted Text

`<pre> </pre>`

Preformatted text preserves white space when it is important for conveying meaning. By default, **pre** text displays in a constant-width font, such as Courier.

`<pre>`

```
This is          an          example of
      text with a      lot of
                           curious
                           whitespace.
```

`</pre>`

```
This is          an          example of
      text with a      lot of
                           curious
                           whitespace.
```

Line Breaks

`<br>`

The empty **br** element inserts a line break.

```
<p>So much depends <br>upon <br><br>a red wheel <br>barrow</p>
```

So much depends
upon

a red wheel
barrow

Thematic Breaks (Horizontal Rules)

`<hr>`

Indicates one topic has completed and another one is beginning. Browsers display a horizontal rule (line) in its place:

```
<h3>Times</h3>
<p>Description and history of the Times typeface.</p>
<hr>
<h3>Georgia</h3>
<p>Description and history of the Georgia typeface.</p>
```

Times

Description and history of the Times typeface.

Georgia

Description and history of the Georgia typeface.

Lists

There are three types of lists in HTML:

- Unordered lists
- Ordered lists
- Description lists

Unordered Lists

In unordered lists items may appear in any order (examples, names, options, etc.). Most lists fall into this category.

`<ul>` `</ul>` Defines the whole list

`<li>` `</li>` Defines each list item

Unordered Lists (cont'd)

```
<ul>
  <li>Serif</li>
  <li>Sans-serif</li>
  <li>Script</li>
  <li>Display</li>
  <li>Dingbats</li>
</ul>
```

You can change the appearance of the list dramatically with style sheet rules.

- Serif
- Sans-serif
- Script
- Display
- Dingbats

Serif
Sans-serif
Script
Display
Dingbats

SERIF
SANS-SERIF
SCRIPT
DISPLAY
DINGBATS

Serif

Sans-serif

Script

Display

Dingbats

SERIF

SANS-SERIF

SCRIPT

DISPLAY

DINGBATS

Ordered Lists

In ordered lists items occur in a particular order, such as step-by-step instructions or driving directions.

`<ol>` `</ol>` Defines the whole list

`<li>` `</li>` Defines each list item

Ordered Lists (cont'd.)

`<ol>`

`<li>Gutenberg develops moveable type (1450s)</li>`

`<li>Linotype is introduced (1890s)</li>`

`<li>Photocomposition catches on (1950s)</li>`

`<li>Type goes digital (1980s)</li>`

`</ol>`

1. Gutenberg develops moveable type (1450s)
2. Linotype is introduced (1890s)
3. Photocomposition catches on (1950s)
4. Type goes digital (1980s)

Description Lists

Description lists are used for any type of **name/value pairs**, such as terms/definitions, questions/answers, etc.

`<dl>` `</dl>` Defines the whole list

`<dt>` `</dt>` Defines a name, such as a term

`<dd>` `</dd>` Defines a value, such as a definition

Description Lists

```
<dl>
```

```
  <dt>Linotype</dt>
```

```
  <dd>Line-casting allowed type to be selected, used, then recirculated  
into the machine automatically. This advance increased the speed of  
typesetting and printing dramatically.</dd>
```

```
  <dt>Photocomposition</dt>
```

```
  <dd>Typefaces are stored on film then projected onto photo-sensitive  
paper. Lenses adjust the size of the type.</dd>
```

```
  <dt>Digital type</dt>
```

```
  <dd><p>Digital typefaces store the outline of the font shape in a  
format such as Postscript. The outline may be scaled to any size for  
output.</p>
```

```
    <p>Postscript emerged as a standard due to its support of  
graphics and its early support on the Macintosh computer and Apple  
laser printer.</p>
```

```
  </dd>
```

```
</dl>
```

Description Lists

Linotype

Line-casting allowed type to be selected, used, then recirculated into the machine automatically. This advance increased the speed of typesetting and printing dramatically.

Photocomposition

Typefaces are stored on film then projected onto photo-sensitive paper. Lenses adjust the size of the type.

Digital type

Digital typefaces store the outline of the font shape in a format such as Postscript. The outline may may be scaled to any size for output.

Postscript emerged as a standard due to its support of graphics and its early support on the Macintosh computer and Apple laser printer.

Nested Lists

Any list can be nested within another list; it just has to be placed within a list item. This example shows the structure of an unordered list nested in the second item of an ordered list:

```
<ol>  
  <li></li>  
  <li>  
    <ul>  
      <li></li>  
      <li></li>  
      <li></li>  
    </ul>  
  </li>  
</ol>
```

Nested Lists

- first item
- second item
 - second item first subitem
 - second item second subitem
 - second item second subitem first sub-subitem
 - second item second subitem second sub-subitem
 - second item second subitem third sub-subitem
 - second item third subitem
- third item

Nested Lists

```
1 <ul>
2   <li>first item</li>
3   <li>second item
4     <!-- Look, the closing </li> tag is not placed here! -->
5     <ul>
6       <li>second item first subitem</li>
7       <li>second item second subitem
8         <!-- Same for the second nested unordered list! -->
9         <ul>
10          <li>second item second subitem first sub-subitem</li>
11          <li>second item second subitem second sub-subitem</li>
12          <li>second item second subitem third sub-subitem</li>
13        </ul>
14      </li> <!-- Closing </li> tag for the li that
15        contains the third unordered list -->
16      <li>second item third subitem</li>
17    </ul>
18    <!-- Here is the closing </li> tag -->
19  </li>
20  <li>third item</li>
21 </ul>
```

Ordered List inside Unordered List

- first item
- second item
 1. second item first subitem
 2. second item second subitem
 3. second item third subitem
- third item

Ordered List inside Unordered List

```
1  <ul>
2    <li>first item</li>
3    <li>second item
4    <!-- Look, the closing </li> tag is not placed here! -->
5      <ol>
6        <li>second item first subitem</li>
7        <li>second item second subitem</li>
8        <li>second item third subitem</li>
9      </ol>
10   <!-- Here is the closing </li> tag -->
11   </li>
12   <li>third item</li>
13 </ul>
```