

10

EMBEDDED MEDIA

OVERVIEW

- **Frames**
- **iframes**
- **Generic object element**
- **Video players**
- **Audio players**
- **Canvas**

Frames

`<frame> </frame>`

- It is used to divide your browser window into multiple sections
- Each section can load separate HTML pages
- Not suitable for small size screens

```
<frameset cols = "25%,50%,25%">
<frame name="left" src="https://cms.bnu.edu.pk/" />
<frame name="center" src="https://cms.bnu.edu.pk/" />
<frame name="right" src="https://cms.bnu.edu.pk/" />
<noframes>
  Your browser does not support frames.
</noframes>
</frameset>
```


Frames

`<frame> </frame>`

- It is used to divide your browser window into multiple sections
- Each section can load separate HTML pages
- Not suitable for small size screens

```
<frameset rows = "25%,50%,25%">  
<frame name="top" src="https://cms.bnu.edu.pk/" />  
<frame name="main" src="https://cms.bnu.edu.pk/" />  
<frame name="bottom" src="https://cms.bnu.edu.pk/" />  
<noframes>  
    Your browser does not support frames.  
</noframes>  
</frameset>
```

iframe (cont'd)

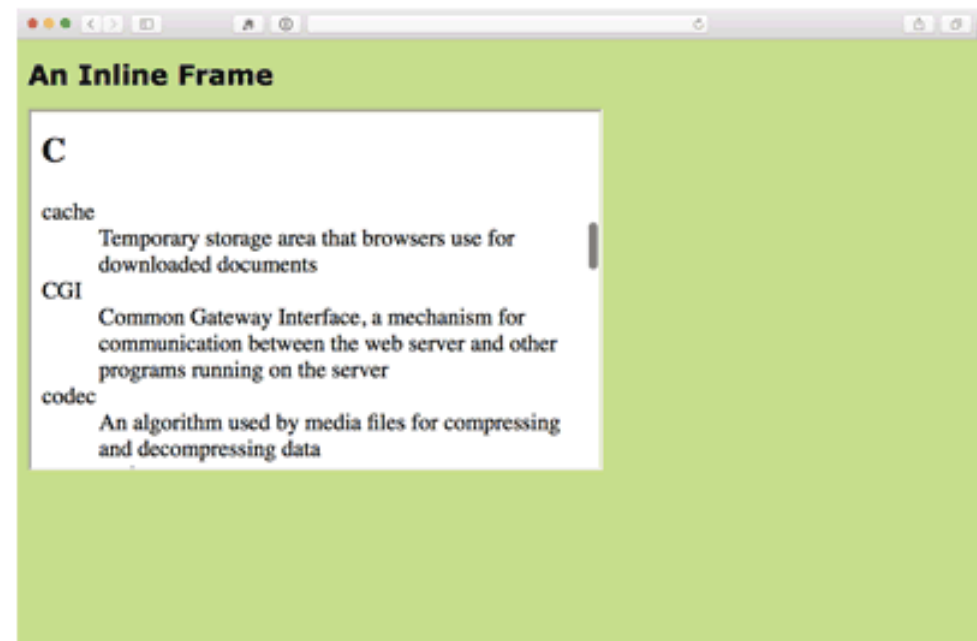

```
<h1>An Inline Frame</h1>
```

```
<iframe src="glossary.html" width="400" height="250">
```

```
  Your browser does not support inline frames. Read  
  the
```

```
<a href="glossary.html">glossary</a>.
```

```
</iframe>
```


- The content of the **iframe** element is a fallback that displays if iframe is not supported.
- The **width** and **height** attributes specify the size of the window in pixels.

Window-in-a-Window (iframe)

`<iframe> </iframe>`

- The **iframe** element lets you embed a separate HTML document on a page.
- It displays in its own window-in-a-window (called a **nested browsing context**).
- Commonly used to embed videos, maps, and advertising

iframe (cont'd)

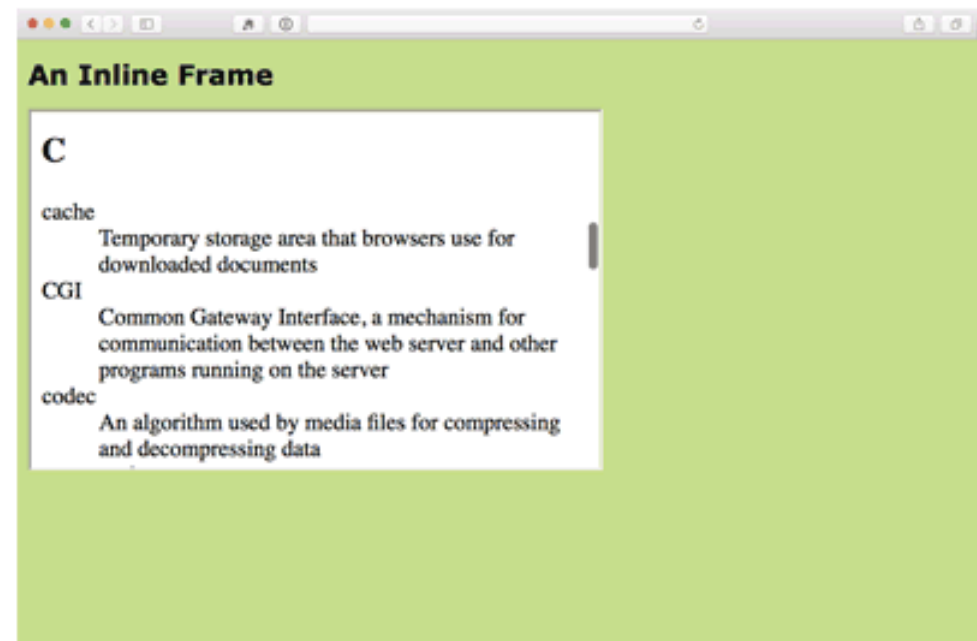

```
<h1>An Inline Frame</h1>
```

```
<iframe src="glossary.html" width="400" height="250">
```

```
  Your browser does not support inline frames. Read  
  the
```

```
<a href="glossary.html">glossary</a>.
```

```
</iframe>
```

- The content of the **iframe** element is a fallback that displays if iframe is not supported.
- The **width** and **height** attributes specify the size of the window in pixels.

The object Tag

`<object> </object>`

`<param> </param>`

- The `<object>.... </object>` tag is used to embedded object with HTML document.
- It includes audio, video, Java applets, PDF, and more.
- `<object>` tag also used to embed another webpage into a HTML document.
- The text between the `<object>` and `</object>` is an alternate text for browsers that do not support this tag.
- `<param>` tag is used to pass parameters to plugins that have been embedded with the `<object>` tag.

The object Element

`<object> </object>`

`<param> </param>`

```
<object data="picture.svg" type="image/svg+xml">  
    
</object>
```

- A generic element for embedding media on a web page. The media may require a plug-in to run.
- The **data** attribute points to the media file.
- The **type** attribute is the type of media (its MIME type).
- The content of the **object** element is a fallback if the media type isn't supported.

The object Element (cont'd)

Attribute	Value	Description
Name	Name	Specifies the name of a parameter
Value	Value	Specifies the value of the parameter

Name = autoplay, width, height, src etc

Value = true, false, 400, 200, raaz.mp4 etc

```
<param name="autostart" value="false">  
<param name="controller" value="true">
```

The object Element (cont'd)

```
<object data="friends-episode1.mp4" type="video/mp4">  
<param name="width" value="320">  
</object>
```

Name and value are two parameters. Some media formats may require that the **object** contain a number of **param** elements that set parameters specific to that type of media.

Example: Starting a video automatically or displaying player controls