

12

FORMATTING TEXT

Quiz 2

- Written + Lab in next week
- Monday 20th November
- Syallabus : Lecture 6, Lecture 7, and lecture 8.

CSS Basic Font Properties

CSS font properties deal with specifying the shapes of the characters themselves:

- `font-family`
- `font-size`
- `font-weight`
- `font-style`
- `font-variant`
- `font` (a shorthand that includes settings for all of the above)

Specifying the Font Family

`font-family`

Values: One or more font family names, separated by commas

Example:

```
body { font-family: Arial; }  
var { font-family: Courier, monospace; }
```

Specifying the Font Family (cont'd)

- Font names must be capitalized (except generic font families).
- Use commas to separate multiple font names.
- If the name has a character space, it must appear within quotation marks:

```
p { font-family: "Duru Sans", Verdana, sans-serif; }
```

Using Fonts on the Web

- The font must be available on the user's machine for it to display.
- The best practice is to provide a list of options. The browser uses the first one that is available.
- Start with the font you want and then provide backup options ending with a generic font family, as shown here:

```
p { font-family: "Duru Sans", Verdana, sans-serif; }
```

- You can also download a web font with the page, but it adds to the download and display time.

Generic Font Families

- Generic font families instruct the browser to use an available font from one of five stylistic categories:
serif, sans-serif, monospace, cursive, fantasy
- Generic font families are often used as the last backup option.

Generic Font Families (cont'd)

serif



Hello
Times

Hello
Georgia

Hello
Times New Roman

Hello
Lucida

sans-serif



Hello
Verdana

Hello
Trebuchet MS

Hello
Arial

Hello
Arial Black

monospace

W i

Monospace font
(equal widths)

W i

Proportional font
(different widths)

Hello
Courier

Hello
Courier New

Hello
Andale Mono

cursive

Hello
Apple Chancery

Hello
Comic Sans

Hello
Snell

fantasy

Hello
Impact

HELLO
Stencil

HELLO
Mojo

Specifying Font Size

`font-size`

Simplest Example:

```
p { font-size: 20px; }
```

Font Weight (Boldness)

The font weight property allows to set the font weight of the text present on an HTML Page. We can set this property to *normal*, *bold*, *bolder*, *lighter*, *number* (100, 200, 300 upto 900)

Example:

```
h1 { font-weight: normal; }  
span.new { font-weight: bold; }
```

- Most common values are normal and bold.
- Numerical values are useful when using a font with multiple weights.

Font Style (Italics)

font-style

Values: normal, italic, oblique

Example:

```
cite { font-style: italic; }
```

- Makes text italic, normal, or oblique (slanted, but generally the same as italics).

Small Caps

font-variant

Values (in CSS2.1): `normal`, `small-caps`

Example:

```
abbr { font-variant: small-caps; }
```

- Small caps are a separate font design that uses small uppercase characters in place of lowercase letters.
- They help acronyms and other strings of capital letters blend in with the weight of the surrounding text.

Condensed and Extended Text

font-stretch

Values (in CSS2.1): normal, ultra-condensed, extra-condensed, condensed, semi-condensed, semi-expanded, expanded, extra-expanded, ultra-expanded

Example:

```
abbr { font-stretch: expanded; }
```

- Tells the browser to select a normal, condensed, or extended font variation from a typeface if it is available

Design

Universe Ultra Condensed

Design

Universe Condensed

Design

Univers

Design

Universe Extended

Text Line Treatments

Some properties control whole lines of text:

- Line height (`line-height`)
- Indents (`text-indent`)
- Horizontal alignment (`text-align`)

Line Height

`line-height`

Values: *Number, length, percentage*, `normal`


Example:

```
p { line-height: 1.4em; }
```

- Line height defines the minimum distance from baseline to baseline in text.

Line Height (cont'd.)

- The **baseline** is the imaginary line upon which the bottoms of characters sit.
- If a large character or image is on a line, the line height expands to accommodate it.

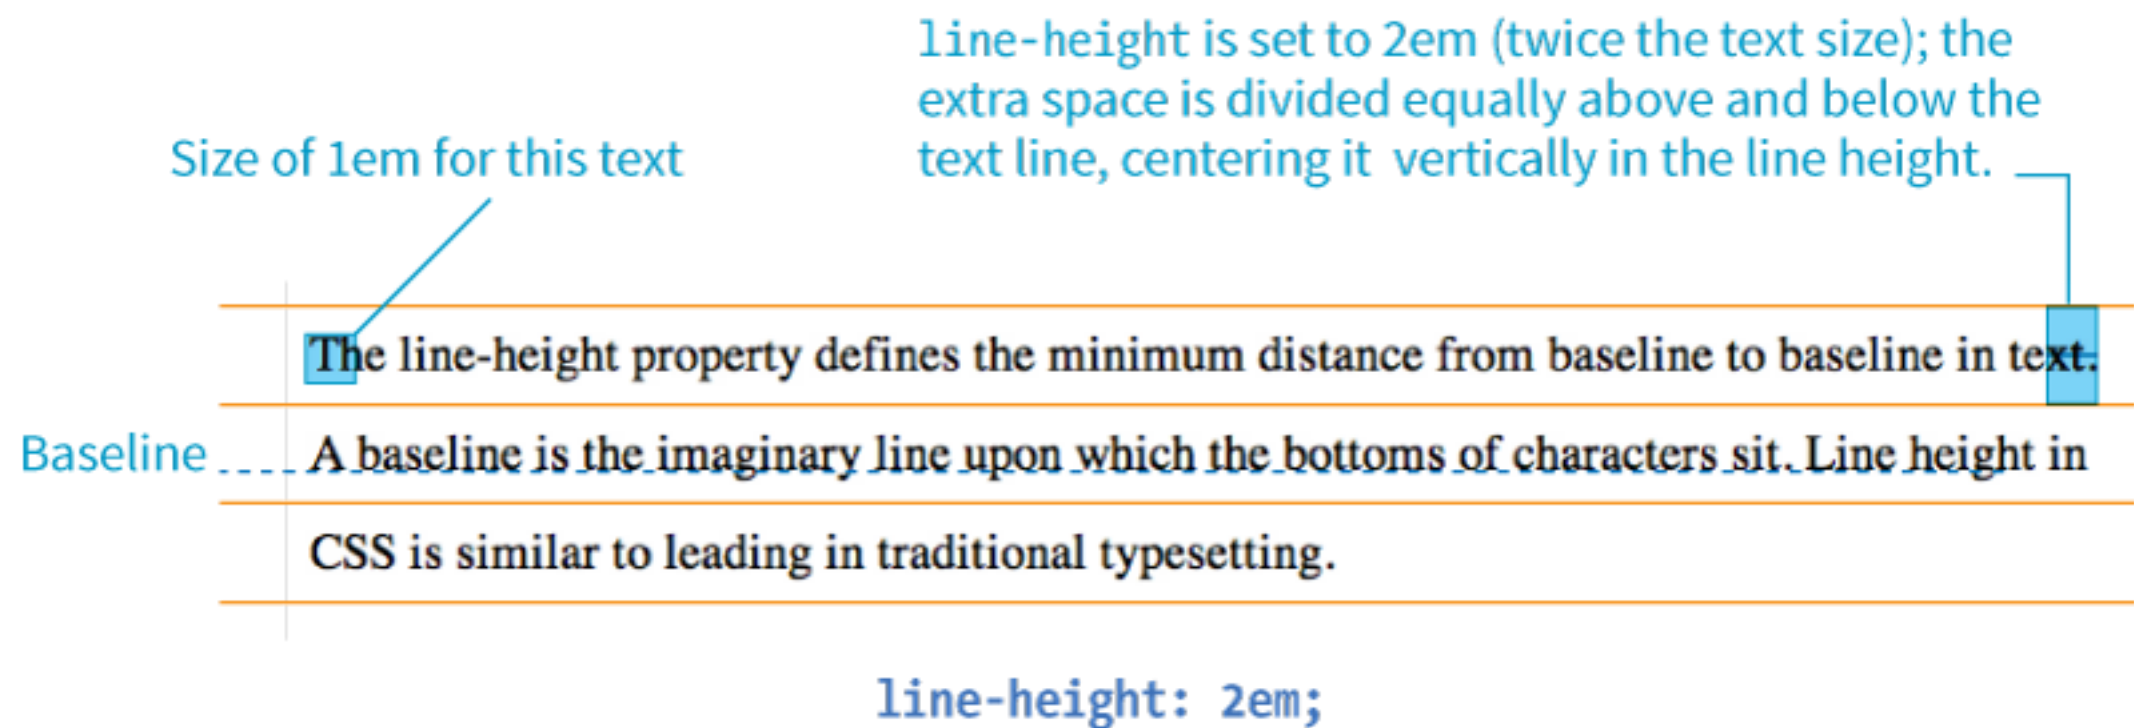

Indents

text-indent

The text-indent property specifies the indentation of the first line in a text-block.

Values: *Length, percentage*

Examples:

```
p {text-indent: 2em; }
```

```
p {text-indent: 25%; }
```


```
p {text-indent: -35px; }
```



Paragraph 1. The text-indent property indents only the first line of text by a specified amount. You can specify a length measurement or a percentage value.



Paragraph 2. The text-indent property indents only the first line of text by a specified amount. You can specify a length measurement or a percentage value.



Paragraph 3. The text-indent property indents only the first line of text by a specified amount. You can specify a length measurement or a percentage value.

Horizontal Text Alignment

`text-align`

Values: `left`, `right`, `center`, `justify`, `start`, `end`

Examples:

`text-align: left;`

Paragraph 1. The text-align property controls the horizontal alignment of the text within an element. It does not affect the alignment of the element on the page. The resulting text behavior of the various values should be fairly intuitive.

`text-align: right;`

Paragraph 2. The text-align property controls the horizontal alignment of the text within an element. It does not affect the alignment of the element on the page. The resulting text behavior of the various values should be fairly intuitive.

`text-align: center;`

Paragraph 3. The text-align property controls the horizontal alignment of the text within an element. It does not affect the alignment of the element on the page. The resulting text behavior of the various values should be fairly intuitive.

`text-align: justify;`

Paragraph 4. The text-align property controls the horizontal alignment of the text within an element. It does not affect the alignment of the element on the page. The resulting text behavior of the various values should be fairly intuitive.

Underlines (Text Decoration)

`text-decoration`

Values: none, underline, overline, line-through, blink

Examples: I've got laser eyes.

`text-decoration: underline;`

I've got laser eyes.

`text-decoration: overline;`

~~I've got laser eyes.~~

`text-decoration: line-through;`

NOTE:

`text-decoration` is often used to turn **off** underlines under links:

```
a {  
    text-decoration: none;  
}
```

Capitalization

`text-transform`

Values:

`none`, `capitalize`, `lowercase`, `uppercase`, `full-width`

Examples:

`text-transform: none;`
(as it was typed in the source)

And I know what you're thinking.

`text-transform: capitalize;`

And I Know What You're Thinking.

`text-transform: lowercase;`

and i know what you're thinking.

`text-transform: uppercase;`

AND I KNOW WHAT YOU'RE THINKING.

Spacing

letter-spacing

Values: *length*, normal

word-spacing

Values: *length*, normal

Examples:

```
B l a c k   G o o s e   B i s t r o   S u m m e r   M e n u  
p { letter-spacing: 8px; }
```

```
Black   Goose   Bistro   Summer   Menu  
p { word-spacing: 1.5em; }
```


Text Shadow

`text-shadow`

Values: *'horizontal-offset' 'vertical-offset' 'blur-radius' 'color'*, none

The value is two offset measurements, an optional blur radius, and a color value (with no commas between).

Example:

The text "The Jenville Show" is displayed in a bold, green, sans-serif font. It has a thin, light silver shadow offset to the bottom-right, giving it a subtle 3D effect.

```
text-shadow: .2em .2em .1em silver;
```

The text "The Jenville Show" is displayed in a bold, green, sans-serif font. It has a thick, light silver shadow offset to the bottom-right, creating a more pronounced 3D effect than the first example.

```
text-shadow: .2em .2em .3em silver;
```

List Style Properties

There are three properties for affecting the display of lists:

- **`list-style-type`**

Chooses the type of list marker

- **`list-style-position`**

Sets the position of the marker relative to the list element box

- **`list-style-image`**

Allows you to specify your own image for use as a bullet

LIST STYLES

Choosing a Marker

`list-style-type`

Values:

`none, disc, circle, square, decimal, decimal-leading-zero, lower-alpha, upper-alpha, lower-latin, upper-latin, lower-roman, upper-roman, lower-greek`

Unordered lists: `ul { list-style-type: keyword; }`

- `disc`
- radish
 - avocado
 - pomegranite
 - cucumber
 - persimmon

- `circle`
- radish
 - avocado
 - pomegranite
 - cucumber
 - persimmon

- `square`
- radish
 - avocado
 - pomegranite
 - cucumber
 - persimmon

LIST STYLES

Choosing a Marker (cont'd)

Ordered lists: `ol { list-style-type: keyword; }`

Keyword	System
decimal	1, 2, 3, 4, 5...
decimal-leading-zero	01, 02, 03, 04, 05...
lower-alpha	a, b, c, d, e...
upper-alpha	A, B, C, D, E...
lower-latin	a, b, c, d, e... (same as lower-alpha)
upper-latin	A, B, C, D, E... (same as upper-alpha)
lower-roman	i, ii, iii, iv, v...
upper-roman	I, II, III, IV, V...
lower-greek	α, β, γ, δ, ε...

LIST STYLES

Marker Position

`list-style-position`

Values: `inside`, `outside`, `hanging`

Positions the marker relative to the content area:

`outside`

- **Radish.** Praesent in lacinia risus. Morbi urna ipsum, efficitur id erat pellentesque, tincidunt commodo sem. Phasellus est velit, porttitor vel dignissim vitae, commodo ut urna.
- **Avocado.** Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos himenaeos. Curabitur lacinia accumsan est, ut malesuada lorem consectetur eu.

`inside`

- **Radish.** Praesent in lacinia risus. Morbi urna ipsum, efficitur id erat pellentesque, tincidunt commodo sem. Phasellus est velit, porttitor vel dignissim vitae, commodo ut urna.
- **Avocado.** Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos himenaeos. Curabitur lacinia accumsan est, ut malesuada lorem consectetur eu.

LIST STYLES

Custom Bullets

`list-style-image`

Values: `url (location)`, `none`

Example:

```
ul {  
    list-style-type: disc;  
    list-style-image: url (/images/rainbow.gif) ;  
    list-style-position: outside;  
}
```

-  Puppy dogs
-  Sugar frogs
-  Kitten's baby teeth