


QUESTION - 1 :

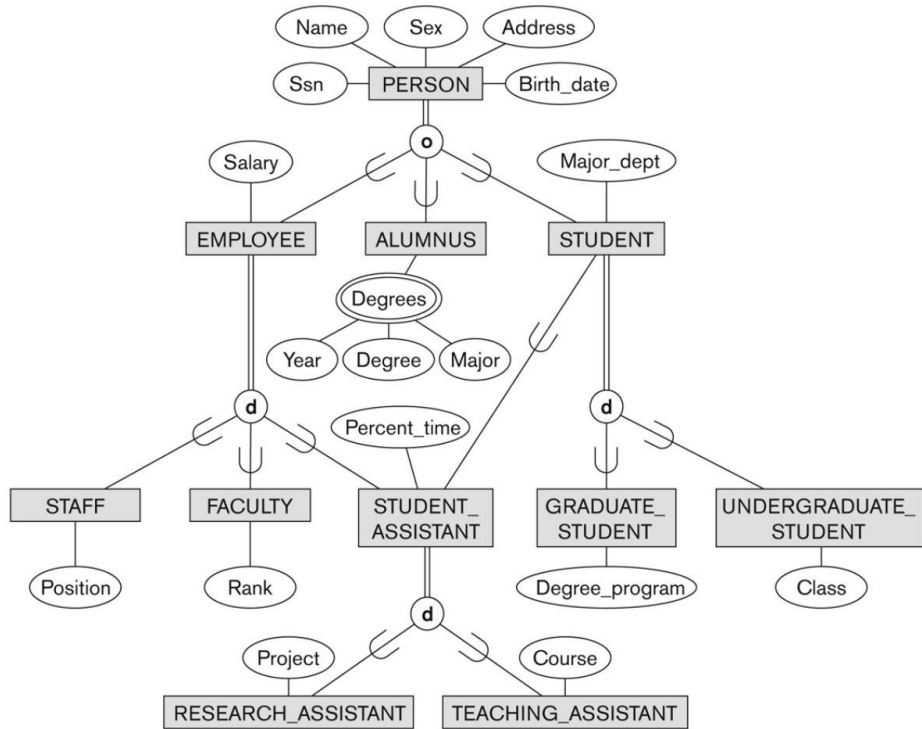

SQL:


1. Create a Database:

In order add data in our database, we first need to create our database.

The syntax for creating database is as follows:

Create database *databasename*;

Example:

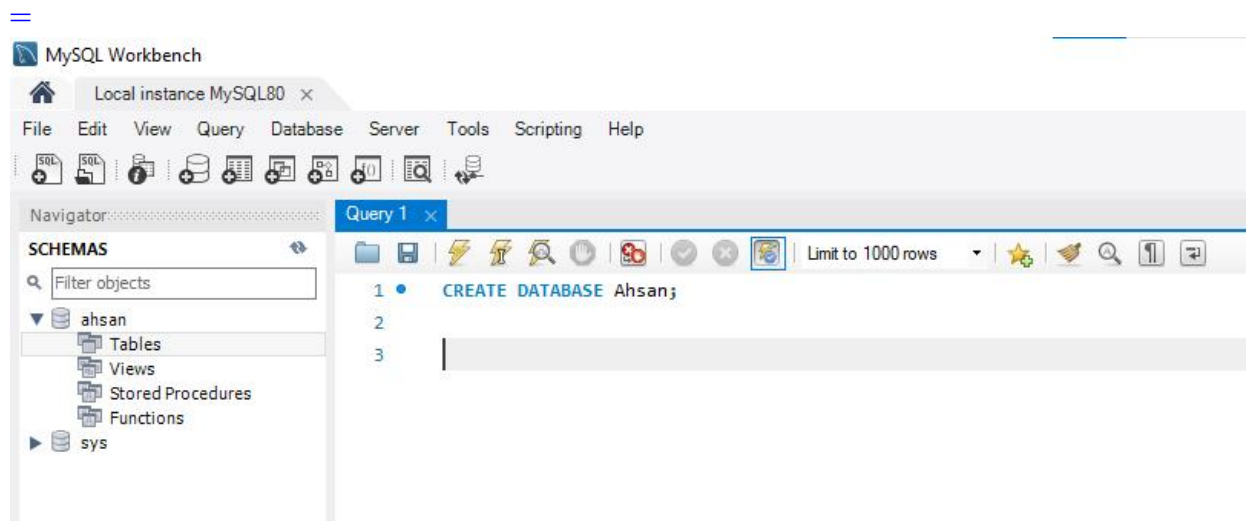


2. Delete a Database:

We can delete a database by using the following syntax:

Drop database *databasename*

Example:

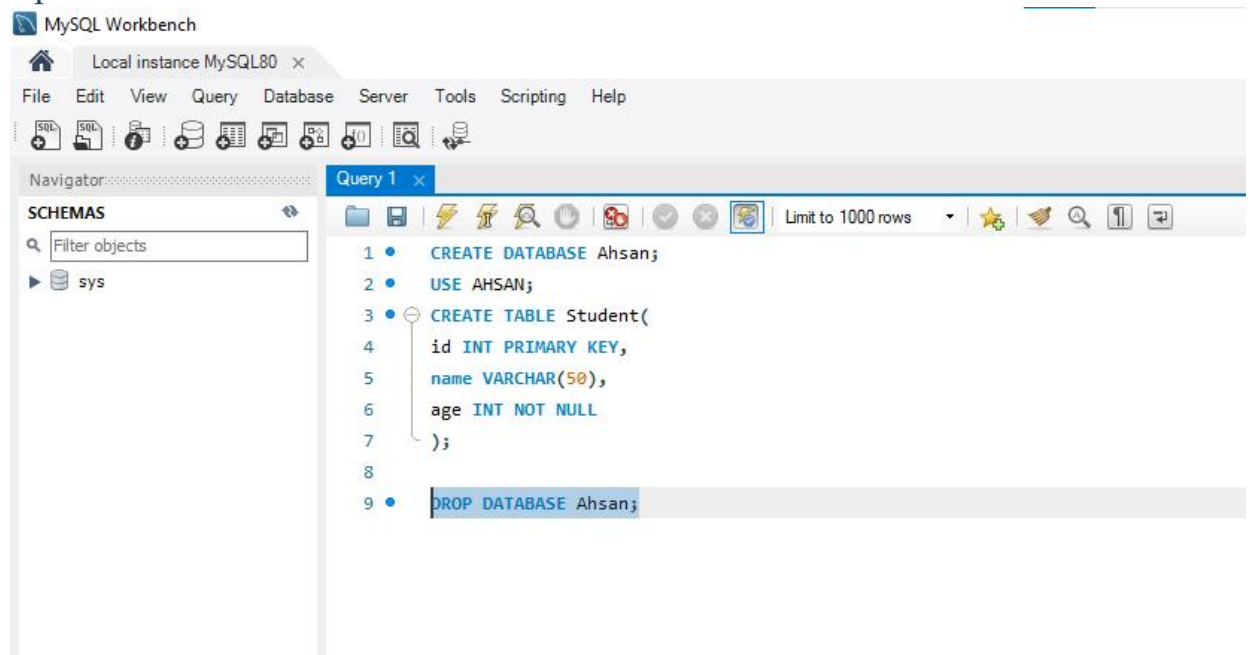


The above statement will delete all tables of Ahsan and their data.

3. Use a database:

To tell the DBMS about the database in which we want to create database tables or add data, we need to use the following syntax after creating our database:

Use *database name*;

Example:

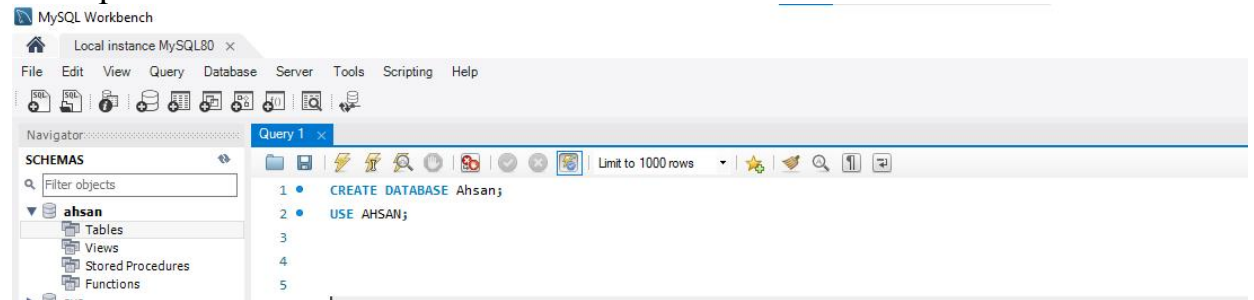


4. Create a Table in Database:

The CREATE TABLE statement is used to create a new table in a database.

Create Table

table _nam
e
(column1
datatype,
column2
datatype,
column3
datatype,
....
);

Example:

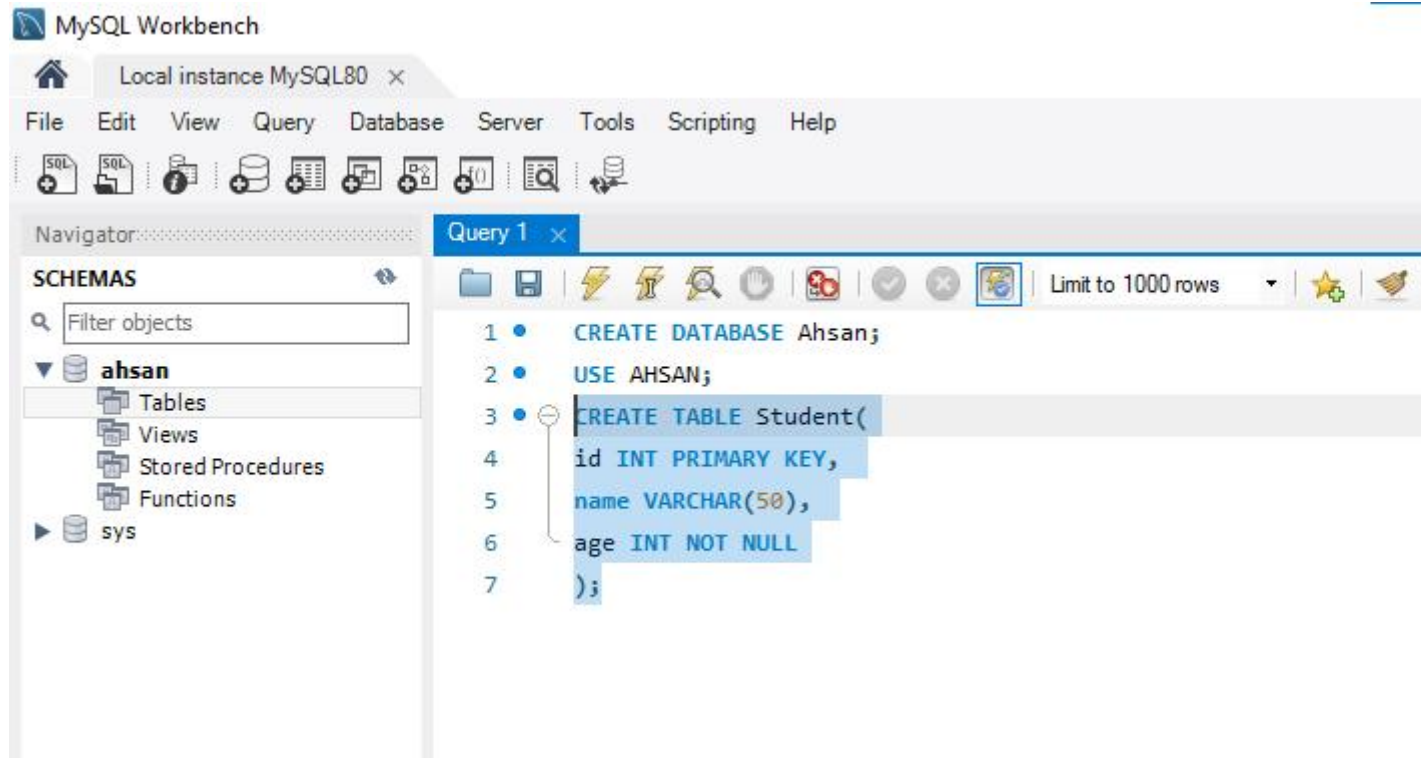

5. INSERT:

The `INSERT` command in SQL is used to add new rows to a table in a database. Below is the general syntax and some examples:

INSERT INTO `table_name` (`column1`, `column2`, `column3`, ...)

VALUES (`value1`, `value2`, `value3`, ...);

EXAMPLE:

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

- ahsan
 - Tables
 - section
 - Columns
 - id
 - NAME
 - AGE
 - Indexes
 - Foreign Keys
 - Triggers
 - Views
 - Stored Procedures
 - Functions
 - sys

Query 1 x

Limit to 1000 rows

```
1
2 • INSERT INTO SECTION values( 1, "ALI", 24);
3 • INSERT INTO SECTION values( 2, "Atiq", 22);
4 • INSERT INTO SECTION values( 3, "HAfiz ", 24);
```