Cucumber Report

Start : abr. 04, 2:38:21.633 a. m.	End : abr. 04, 2:38:26.800 a. m.	Duration : 5.167 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 2

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Profile User	5.167 s	1	0	1	0	3	0	1	2

#	Feature Name	Scenario Name
1	*Profile User*	*select a profile*

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@scenario2	1	0	1	0	1	0	1	0

#	Feature Name	T	P	F	S	Duration
1	Profile User	1	0	1	0	5.167 s
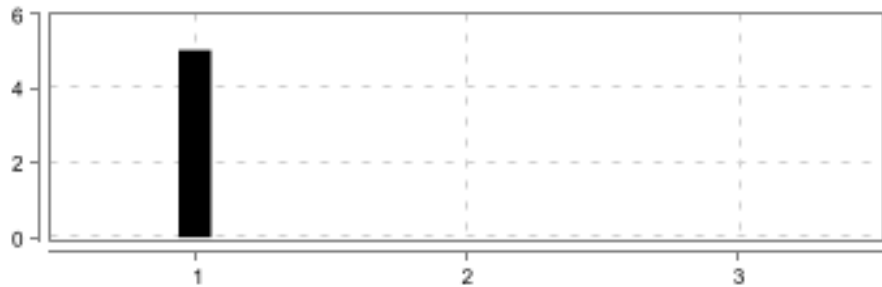
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Profile User	select a profile	3	0	1	2	5.165 s

Profile User

FAILED	DURATION - 5.167 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 2:38:21.633 a. m. // 2:38:26.800 a. m. /			1		3

select a profile

FAILED	DURATION - 5.165 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 2:38:21.635 a. m. // 2:38:26.800 a. m. /				3
Profile User				
@scenario2				

#	Step / Hook Details	Status	Duration
1	Given page of MR2 is all ready	FAILED	5.032 s

	java.lang.ArrayIndexOutOfBoundsException: Index 1 out of bounds for length 1
	    at com.authenticacion.pages.MercanciaPage.switchWindow(MercanciaPage.java:24)
	    at com.authenticacion.steps.StepsGeneralUser.page_of_mr2_is_all_ready(StepsGeneralUser.java:74)
	    at ?.page of MR2 is all ready(file:///C:/Workspace/SeleniumWebDriver/SeleniumAutenticacionBDD/src/test/resources/features/2-profile.feature:9)
	* Not displayable characters are replaced by '?'.		

2	When user select option a profile	SKIPPED	0.000 s
3	Then user can see profile list	SKIPPED	0.000 s
	AFTER - com.authenticacion.utils.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.116 s
	select a profile		

#	Step / Hook Details	Status	Duration
	NOT FOUND		