
2. Time series graphics

2.5 Seasonal subseries plotsOTexts.org/fpp3/


Rob J Hyndman George Athanasopoulos

FORECASTING PRINCIPLES AND PRACTICE



Seasonal subseries plots

```
a10 |>
   gg_subseries(Cost) +
   labs(y = "$ million", title = "Subseries plot: antidiabetic drug sales")
```

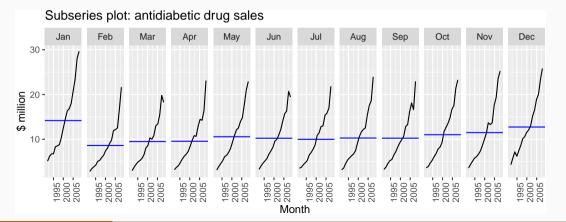


Seasonal subseries plots

- Data for each season collected together in time plot as separate time series.
- Enables the underlying seasonal pattern to be seen clearly, and changes in seasonality over time to be visualized.
- In R: gg_subseries()


Quarterly Australian Beer Production

```
beer <- aus_production |>
  select(Quarter, Beer) |>
  filter(year(Quarter) >= 1992)
beer |> autoplot(Beer)
```

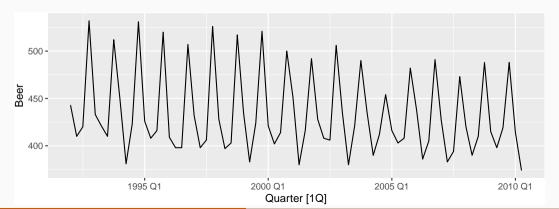

Quarterly Australian Beer Production



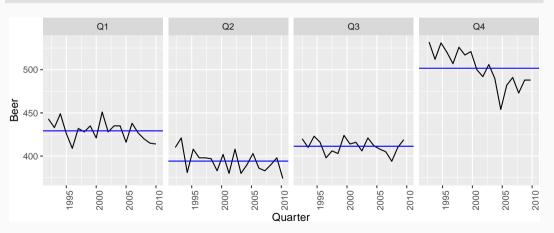

Australian holidays


9 ACT

2000 01 158

```
holidays <- tourism |>
 filter(Purpose == "Holiday") |>
 group_by(State) |>
 summarise(Trips = sum(Trips))
## # A tsibble: 640 x 3 [10]
## # Key:
               State [8]
  State Quarter Trips
##
  <chr> <gtr> <dbl>
##
##
   1 ACT 1998 Q1 196.
   2 ACT 1998 Q2 127.
##
   3 ACT 1998 03 111.
##
##
   4 ACT 1998 Q4 170.
   5 ACT 1999 Q1 108.
##
   6 ACT
##
           1999 02 125.
   7 ACT
##
           1999 03
                   178.
##
   8 ACT
           1999 04 218.
```


Australian holidays

```
holidays |> autoplot(Trips) +
  labs(y = "thousands of trips", title = "Australian domestic holiday nights")
```

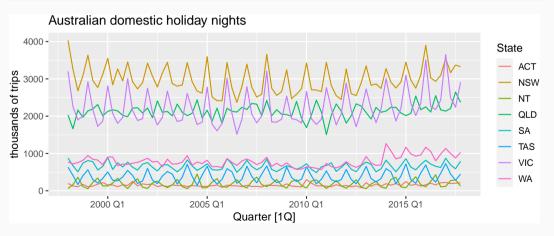

Seasonal plots

```
holidays |> gg_season(Trips) +
  labs(y = "thousands of trips", title = "Australian domestic holiday nights")
```

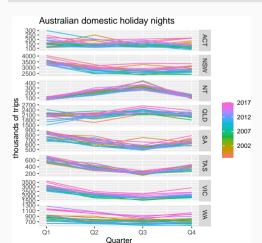

Seasonal subseries plots

```
holidays |>
  gg_subseries(Trips) +
  labs(y = "thousands of trips", title = "Australian domestic holiday nights")
```

