



Chapter 10: Storage and File Structure

Database System Concepts, 6th Ed.

©Silberschatz, Korth and Sudarshan
See www.db-book.com for conditions on re-use




Classification of Physical Storage Media

- Speed with which data can be accessed
- Cost per unit of data
- Reliability
 - data loss on power failure or system crash
 - physical failure of the storage device
- Can differentiate storage into:
 - **volatile storage**: loses contents when power is switched off
 - **non-volatile storage**:
 - ▶ Contents persist even when power is switched off.
 - ▶ Includes secondary and tertiary storage, as well as battery-backed up main-memory.



Magnetic Hard Disk Mechanism

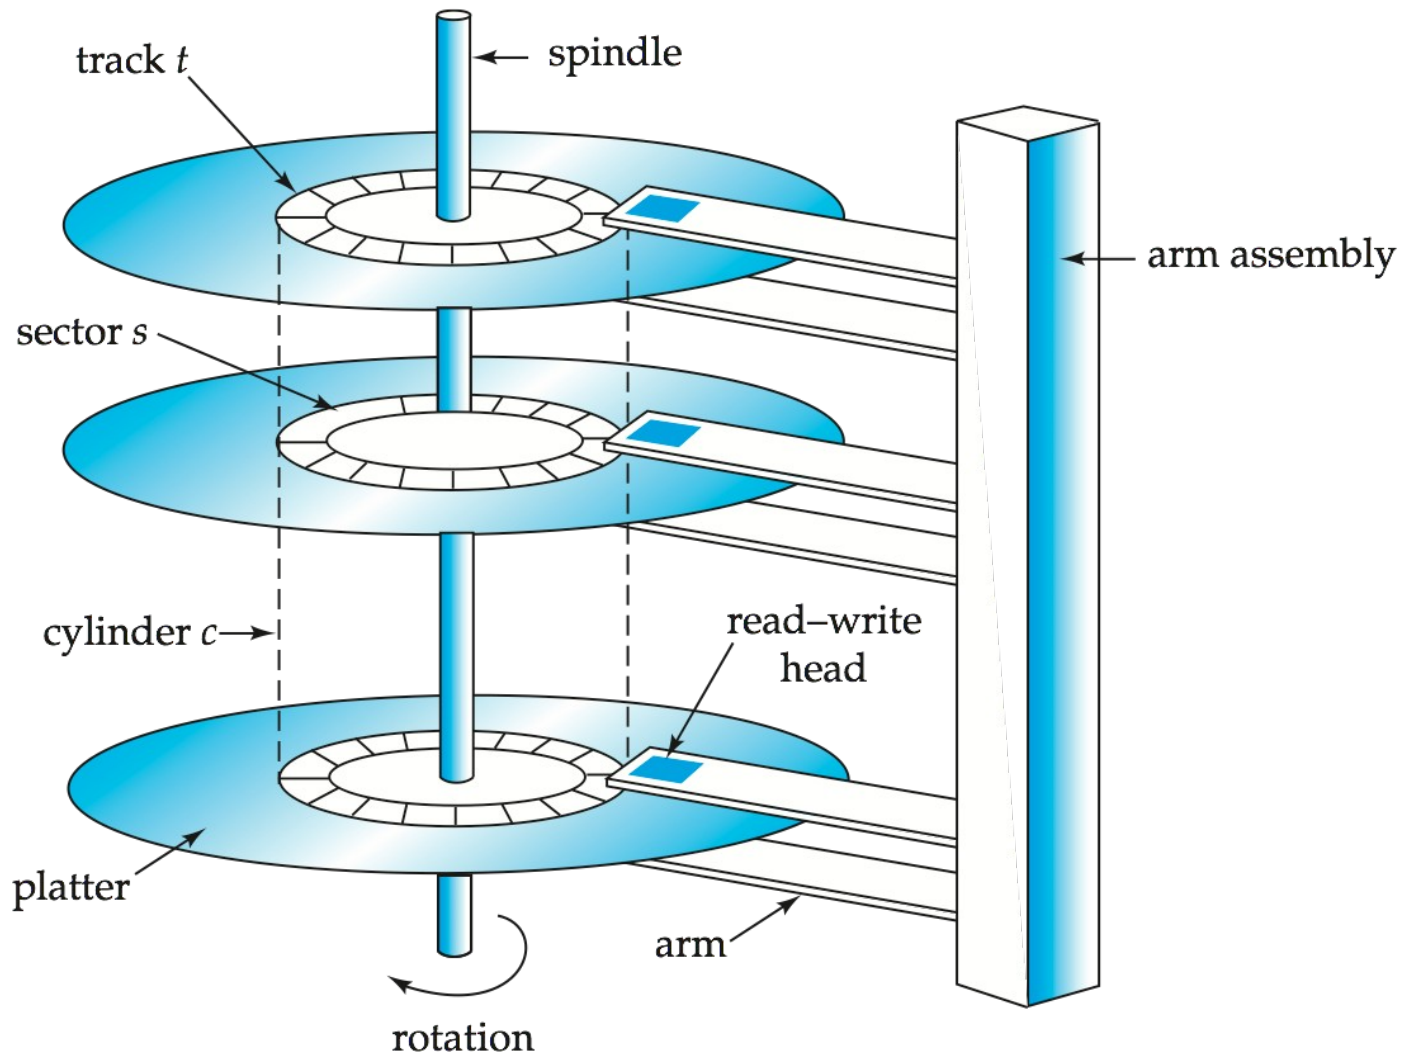

NOTE: Diagram is schematic, and simplifies the structure of actual disk drives



Magnetic Disks

■ Read-write head

- Positioned very close to the platter surface (almost touching it)
- Reads or writes magnetically encoded information.

■ Surface of platter divided into circular **tracks**

- Over 50K-100K tracks per platter on typical hard disks

■ Each track is divided into **sectors**.

- A sector is the smallest unit of data that can be read or written.
- Sector size typically 512 bytes
- Typical sectors per track: 500 to 1000 (on inner tracks) to 1000 to 2000 (on outer tracks)

■ To read/write a sector

- disk arm swings to position head on right track
- platter spins continually; data is read/written as sector passes under head

■ Head-disk assemblies

- multiple disk platters on a single spindle (1 to 5 usually)
- one head per platter, mounted on a common arm.

■ **Cylinder** i consists of i^{th} track of all the platters



Magnetic Disks (Cont.)

- Earlier generation disks were susceptible to head-crashes
 - Surface of earlier generation disks had metal-oxide coatings which would disintegrate on head crash and damage all data on disk
 - Current generation disks are less susceptible to such disastrous failures, although individual sectors may get corrupted
- **Disk controller** – interfaces between the computer system and the disk drive hardware.
 - accepts high-level commands to read or write a sector
 - initiates actions such as moving the disk arm to the right track and actually reading or writing the data
 - Computes and attaches **checksums** to each sector to verify that data is read back correctly
 - ▶ If data is corrupted, with very high probability stored checksum won't match recomputed checksum
 - Ensures successful writing by reading back sector after writing it
 - Performs **remapping of bad sectors**



Performance Measures of Disks

- **Access time** – the time it takes from when a read or write request is issued to when data transfer begins. Consists of:
 - **Seek time** – time it takes to reposition the arm over the correct track.
 - ▶ 4 to 10 milliseconds on typical disks
 - **Rotational latency** – time it takes for the sector to be accessed to appear under the head.
 - ▶ 4 to 11 milliseconds on typical disks (5400 to 15000 r.p.m.)
- **Data-transfer rate** – the rate at which data can be retrieved from or stored to the disk.
 - 25 to 100 MB per second max rate, lower for inner tracks
 - Multiple disks may share a controller, so how much the controller can handle is also important



Optimization of Disk-Block Access

- **Block** – a contiguous sequence of sectors from a single track
 - data is transferred between disk and main memory in blocks
 - sizes range from 512 bytes to several kilobytes
 - ▶ Smaller blocks: more transfers from disk
 - ▶ Larger blocks: more space wasted due to partially filled blocks
 - ▶ Typical block sizes today range from 4 to 16 kilobytes
- **Disk-arm-scheduling** algorithms order pending accesses to tracks so that disk arm movement is minimized



Optimization of Disk Block Access (Cont.)

- **File organization** – optimize block access time by organizing the blocks to correspond to how data will be accessed
 - E.g. Store related information on the same or nearby cylinders.
 - Files may get **fragmented** over time
 - ▶ E.g. if data is inserted to/deleted from the file
 - ▶ Or free blocks on disk are scattered, and newly created file has its blocks scattered over the disk
 - ▶ Sequential access to a fragmented file results in increased disk arm movement
 - Some systems have utilities to **defragment** the file system, in order to speed up file access



File Organization, Record Organization and Storage Access



File Organization

- The database is stored as a collection of *files*. Each file is a sequence of *records*. A record is a sequence of fields.
- One approach:
 - assume record size is fixed
 - each file has records of one particular type only
 - different files are used for different relations

This case is easiest to implement; will consider variable length records later.



Fixed-Length Records

■ Simple approach:

- Store record i starting from byte $n * (i - 1)$, where n is the size of each record.
- Record access is simple but records may cross blocks
 - ▶ Modification: do not allow records to cross block boundaries

■ Deletion of record i : alternatives:

- move records $i + 1, \dots, n$ to $i, \dots, n - 1$
- move record n to i
- do not move records, but link all free records on a *free list*

record 0	10101	Srinivasan	Comp. Sci.	65000
record 1	12121	Wu	Finance	90000
record 2	15151	Mozart	Music	40000
record 3	22222	Einstein	Physics	95000
record 4	32343	El Said	History	60000
record 5	33456	Gold	Physics	87000
record 6	45565	Katz	Comp. Sci.	75000
record 7	58583	Califieri	History	62000
record 8	76543	Singh	Finance	80000
record 9	76766	Crick	Biology	72000
record 10	83821	Brandt	Comp. Sci.	92000
record 11	98345	Kim	Elec. Eng.	80000



Deleting record 3 and compacting

record 0	10101	Srinivasan	Comp. Sci.	65000
record 1	12121	Wu	Finance	90000
record 2	15151	Mozart	Music	40000
record 4	32343	El Said	History	60000
record 5	33456	Gold	Physics	87000
record 6	45565	Katz	Comp. Sci.	75000
record 7	58583	Califieri	History	62000
record 8	76543	Singh	Finance	80000
record 9	76766	Crick	Biology	72000
record 10	83821	Brandt	Comp. Sci.	92000
record 11	98345	Kim	Elec. Eng.	80000



Deleting record 3 and moving last record

record 0	10101	Srinivasan	Comp. Sci.	65000
record 1	12121	Wu	Finance	90000
record 2	15151	Mozart	Music	40000
record 11	98345	Kim	Elec. Eng.	80000
record 4	32343	El Said	History	60000
record 5	33456	Gold	Physics	87000
record 6	45565	Katz	Comp. Sci.	75000
record 7	58583	Califieri	History	62000
record 8	76543	Singh	Finance	80000
record 9	76766	Crick	Biology	72000
record 10	83821	Brandt	Comp. Sci.	92000



Free Lists


- Store the address of the first deleted record in the file header.
- Use this first record to store the address of the second deleted record, and so on
- Can think of these stored addresses as **pointers** since they “point” to the location of a record.
- More space efficient representation: reuse space for normal attributes of free records to store pointers. (No pointers stored in in-use records.)

header				
record 0	10101	Srinivasan	Comp. Sci.	65000
record 1				
record 2	15151	Mozart	Music	40000
record 3	22222	Einstein	Physics	95000
record 4				
record 5	33456	Gold	Physics	87000
record 6				
record 7	58583	Califieri	History	62000
record 8	76543	Singh	Finance	80000
record 9	76766	Crick	Biology	72000
record 10	83821	Brandt	Comp. Sci.	92000
record 11	98345	Kim	Elec. Eng.	80000




Variable-Length Records

- Variable-length records arise in database systems in several ways:
 - Storage of multiple record types in a file.
 - Record types that allow variable lengths for one or more fields such as strings (**varchar**)
 - Record types that allow repeating fields (used in some older data models).
- Attributes are stored in order
- Variable length attributes represented by fixed size (offset, length), with actual data stored after all fixed length attributes
- Null values represented by null-value bitmap

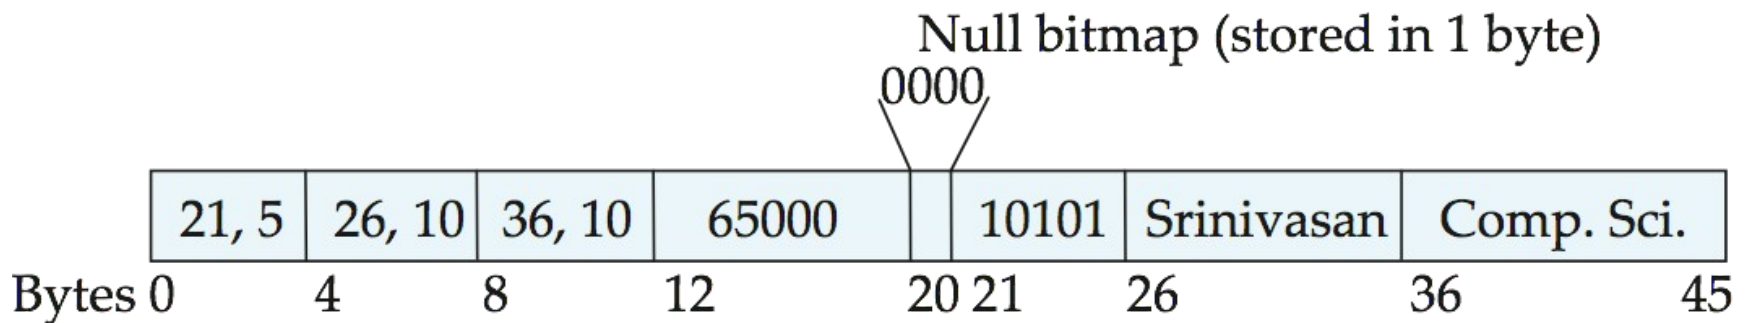



Variable-Length Records: Slotted Page Structure

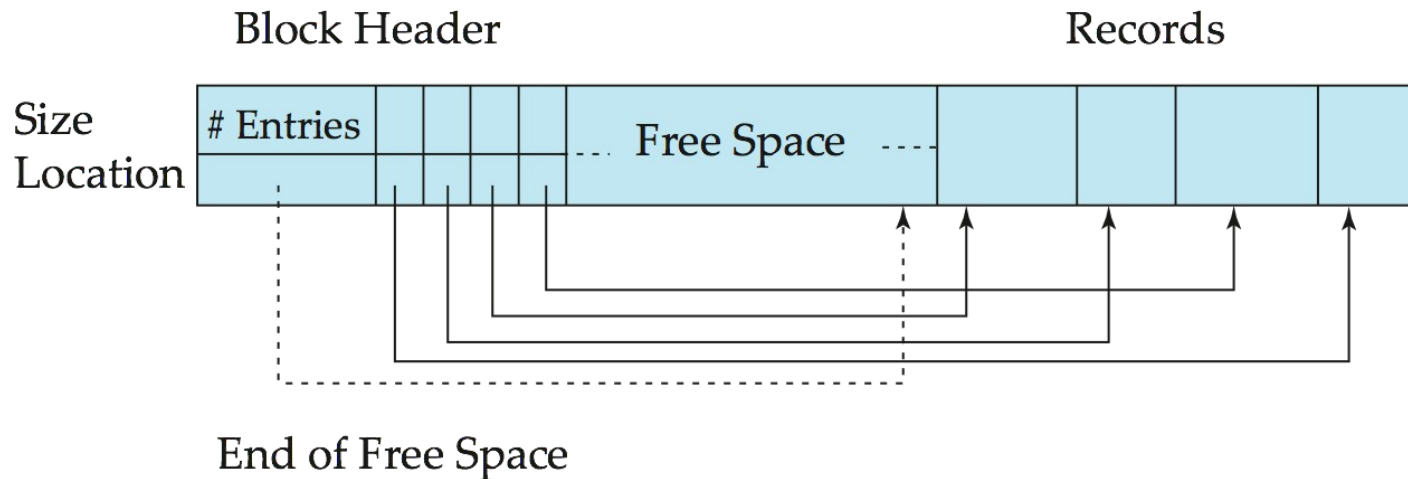

- **Slotted page** header contains:
 - number of record entries
 - end of free space in the block
 - location and size of each record
- Records can be moved around within a page to keep them contiguous with no empty space between them; entry in the header must be updated.
- Pointers should not point directly to record — instead they should point to the entry for the record in header.



Organization of Records in Files


- **Heap** – a record can be placed anywhere in the file where there is space
- **Sequential** – store records in sequential order, based on the value of the search key of each record
- **Hashing** – a hash function computed on some attribute of each record; the result specifies in which block of the file the record should be placed
- Records of each relation may be stored in a separate file. In a **multitable clustering file organization** records of several different relations can be stored in the same file
 - Motivation: store related records on the same block to minimize I/O



Sequential File Organization

- Suitable for applications that require sequential processing of the entire file
- The records in the file are ordered by a **search-key**


10101	Srinivasan	Comp. Sci.	65000	
12121	Wu	Finance	90000	
15151	Mozart	Music	40000	
22222	Einstein	Physics	95000	
32343	El Said	History	60000	
33456	Gold	Physics	87000	
45565	Katz	Comp. Sci.	75000	
58583	Califieri	History	62000	
76543	Singh	Finance	80000	
76766	Crick	Biology	72000	
83821	Brandt	Comp. Sci.	92000	
98345	Kim	Elec. Eng.	80000	

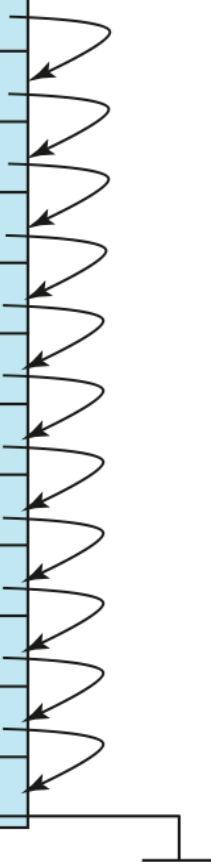



Sequential File Organization (Cont.)

- Deletion – use pointer chains
- Insertion – locate the position where the record is to be inserted
 - if there is free space insert there
 - if no free space, insert the record in an **overflow block**
 - In either case, pointer chain must be updated
- Need to reorganize the file from time to time to restore sequential order

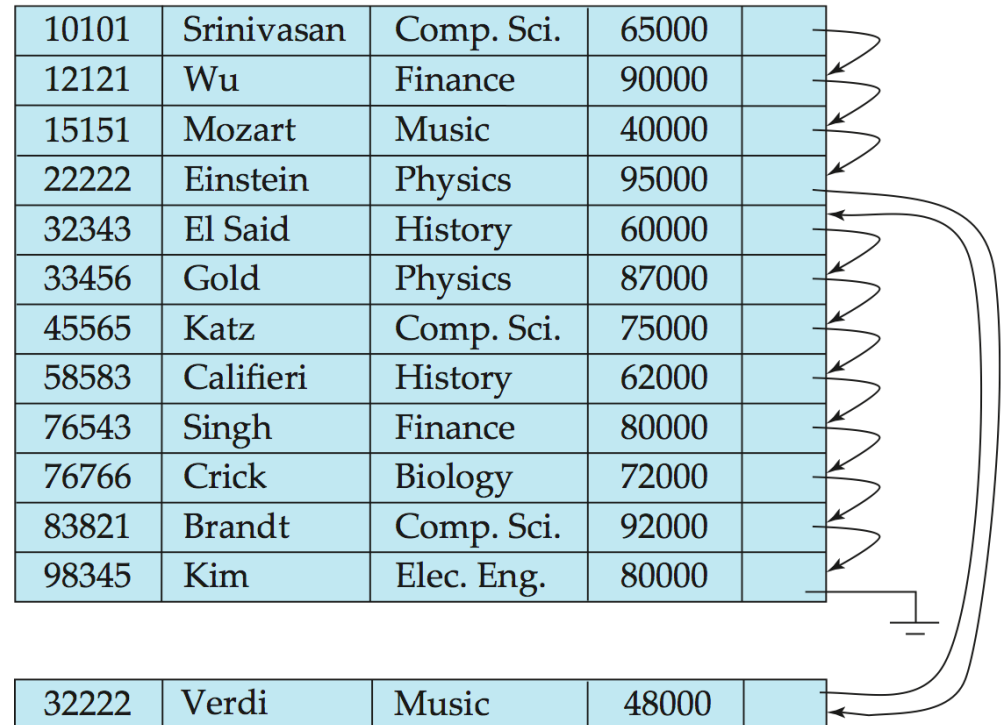



Multitable Clustering File Organization

Store several relations in one file using a **multitable clustering** file organization

department

<i>dept_name</i>	<i>building</i>	<i>budget</i>
Comp. Sci.	Taylor	100000
Physics	Watson	70000

instructor

<i>ID</i>	<i>name</i>	<i>dept_name</i>	<i>salary</i>
10101	Srinivasan	Comp. Sci.	65000
33456	Gold	Physics	87000
45565	Katz	Comp. Sci.	75000
83821	Brandt	Comp. Sci.	92000

multitable clustering
of *department* and
instructor

Comp. Sci.	Taylor	100000
45564	Katz	75000
10101	Srinivasan	65000
83821	Brandt	92000
Physics	Watson	70000
33456	Gold	87000



Multitable Clustering File Organization (cont.)

- good for queries involving *department* ⋈ *instructor*, and for queries involving one single department and its instructors
- bad for queries involving only *department*
- results in variable size records
- Can add pointer chains to link records of a particular relation

Comp. Sci.	Taylor	100000	
45564	Katz	75000	
10101	Srinivasan	65000	
83821	Brandt	92000	
Physics	Watson	70000	
33456	Gold	87000	



Storage Access

- A database file is partitioned into fixed-length storage units called **blocks**. Blocks are units of both storage allocation and data transfer.
- Database system seeks to minimize the number of block transfers between the disk and memory. We can reduce the number of disk accesses by keeping as many blocks as possible in main memory.
- **Buffer** – portion of main memory available to store copies of disk blocks.
- **Buffer manager** – subsystem responsible for allocating buffer space in main memory.



Buffer Manager

- Programs call on the buffer manager when they need a block from disk.
 1. If the block is already in the buffer, buffer manager returns the address of the block in main memory
 2. If the block is not in the buffer, the buffer manager
 1. Allocates space in the buffer for the block
 1. Replacing (throwing out) some other block, if required, to make space for the new block.
 2. Replaced block written back to disk only if it was modified since the most recent time that it was written to/fetched from the disk.
 2. Reads the block from the disk to the buffer, and returns the address of the block in main memory to requester.



Important Instructions

- Read sections
 - 10.2.1, 10.2.2, 10.2.3
 - 10.5
 - 10.6



End of Chapter 10

Database System Concepts, 6th Ed.

©Silberschatz, Korth and Sudarshan
See www.db-book.com for conditions on re-use