A structure-based recommender gains most where molecules have been measured

a A structure-based recommender, by which molecules are new

Analysis-array held-out pairs; molecule-disjoint validation over five partitions; 10,000 whole-array draws

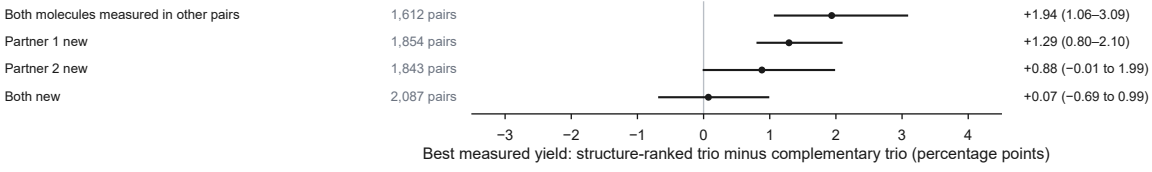

b Within arrays, structural similarity tracks condition preference
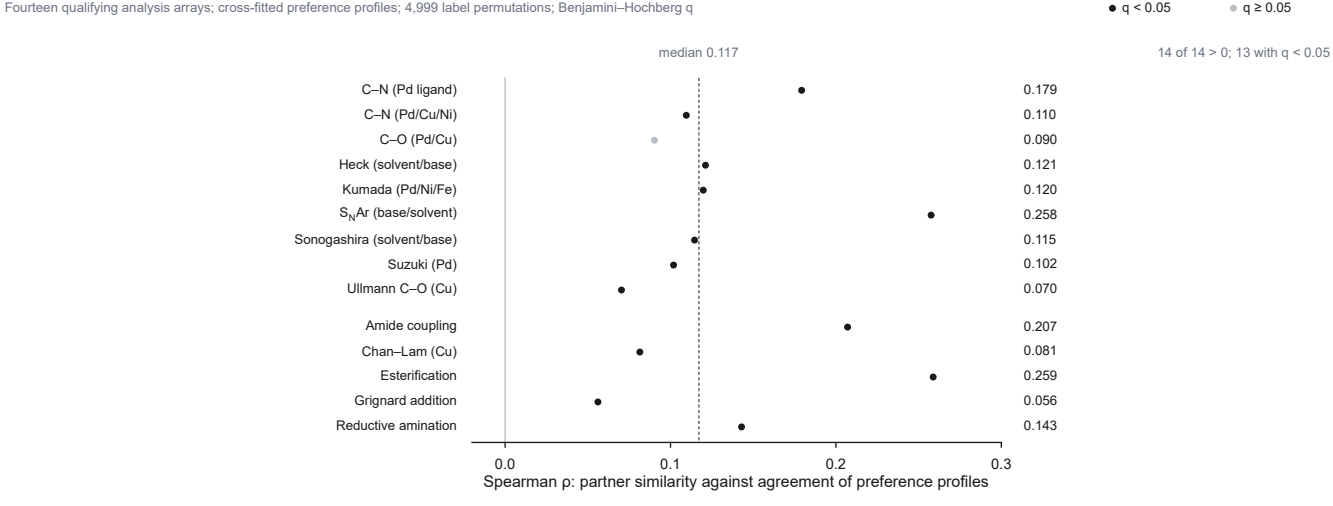
Fourteen qualifying analysis arrays; cross-fitted preference profiles; 4,999 label permutations; Benjamini–Hochberg q