
Ranking conditions by histories, and a molecule's own history against a substitute


a Both partners' histories against a fixed trio

Analysis-array held-out pairs; three repeats of five training folds; 5,000 resamples of building blocks within arrays

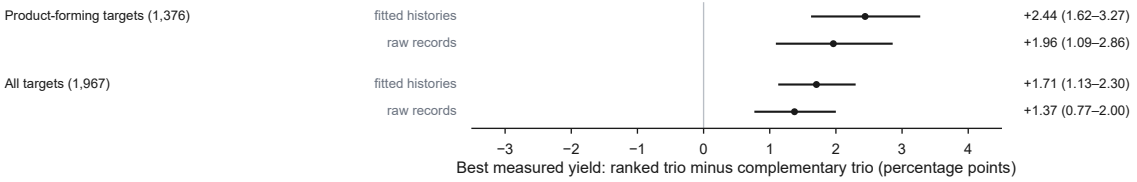


b A molecule's own history against a matched substitute

Analysis-array held-out pairs, fully measured; donors of the same array, role and training fold; 10,000 whole-array draws

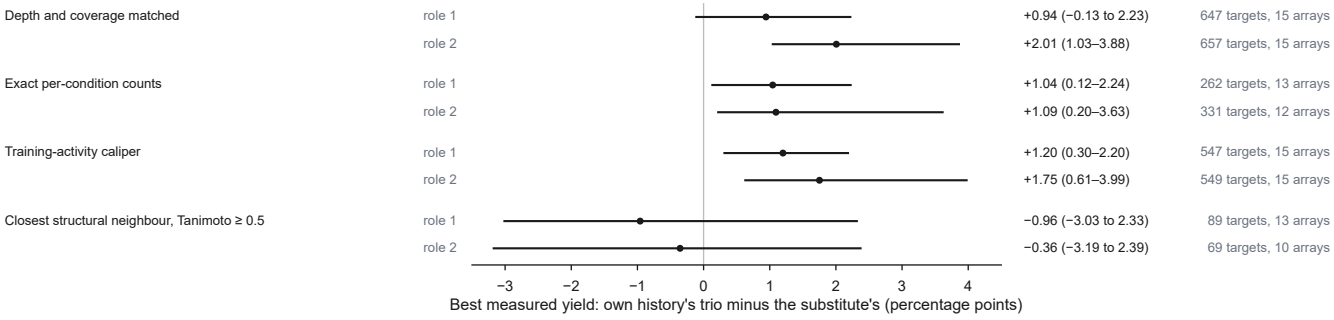

c At equal depth, owner history chooses better panels

Analysis-array held-out pairs; two earlier partners per side; best of three ranked conditions

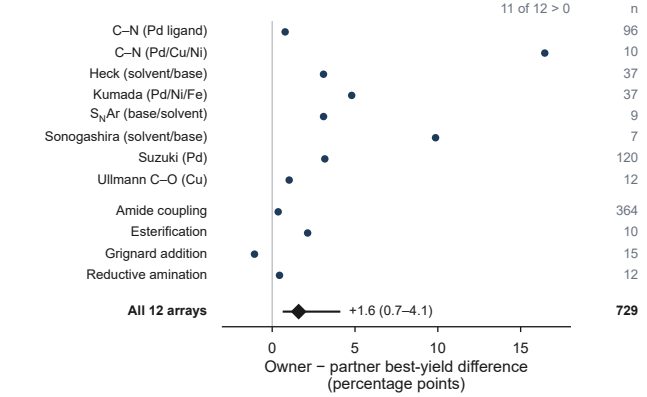

d Beating a fixed panel depends on the reaction

Analysis-array held-out pairs; 0 = fixed complementary trio

