A structure-based recommender gains most where molecules have been measured

A A structure-based recommender, by which molecules are new

Analysis-screen held-out pairs; molecule-disjoint validation over five partitions; 10,000 whole-screen draws

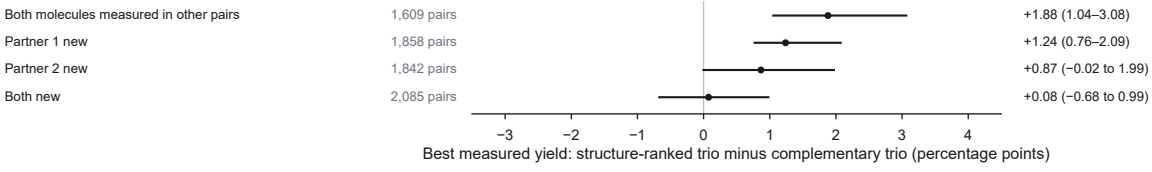

B Within screens, structural similarity tracks condition preference
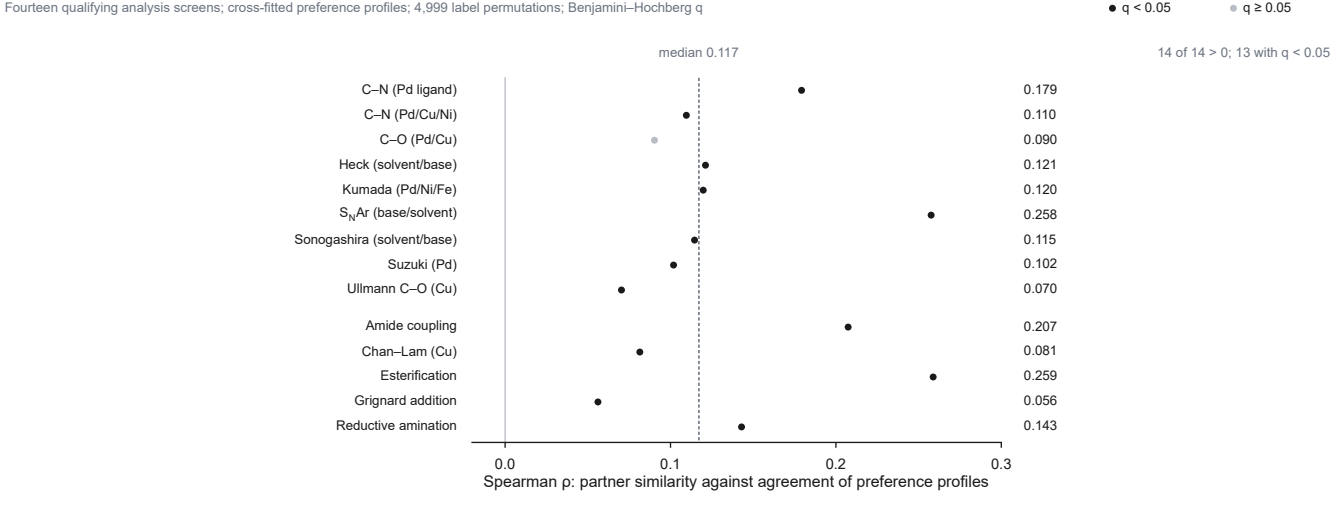
Fourteen qualifying analysis screens; cross-fitted preference profiles; 4,999 label permutations; Benjamini–Hochberg q