

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Recap

Objective & Outline

Fundamentals

Types of Exceptio

Error Handling i

C C Language Featu

Local goto
C Standard Library
Support

Global Variable

Termination
Conditional
Termination
Non-Local goto

Module 36: Programming in C++

Exceptions (Error handling in C)

Intructors: Abir Das and Sourangshu Bhattacharya

Department of Computer Science and Engineering Indian Institute of Technology, Kharagpur

{abir, sourangshu}@cse.iitkgp.ac.in

Slides taken from NPTEL course on Programming in Modern C++

by Prof. Partha Pratim Das



Weekly Recap

Intructors: Abii Das and Sourangshu Bhattacharya

Weekly Recap

Objective & Outline

Exception
Fundamentals
Types of Exception

Error Handling in

Canguage (Eatures KV & Params Local goto : Standard Library upport Global Variables Abnormal Termination Conditional

- Leveraging an innovative solution to the Salary Processing Application in C using function pointers, we compare C and C++ solutions to the problem
- The new C solution with function pointers is used to explain the mechanism for dynamic binding (polymorphic dispatch) based on virtual function tables
- Understood casting in C and C++
- Explained cast operators in C++ and discussed the evils of C-style casting
- Studied const_cast, static_cast, reinterpret_cast, and dynamic_cast with examples
- Understood casting at run-time with RTTI and typeid operator
- Introduced the Semantics of Multiple Inheritance in C++
- Discussed the Diamond Problem and solution approaches
- Illustrated the design choice between inheritance and composition



Module Objectives

Das and

Weekly Reca

Objective & Outline

Exception

Types of Exception

Error Handling

C Language Featu RV & Params Local goto C Standard Librar Support

Global Variable

.....

Conditional Termination

Termination
Non-Local got

Signals

 \bullet Understand the Error handling in C



Module Outline

Objective & Outline

Weekly Recap

Exception Fundamentals

Types of Exceptions

Exception Stages

Error Handling in C

C Language Features

Return Value & Parameters

Local goto

C Standard Library Support

Global Variables

Abnormal Termination

Conditional Termination

Non-Local goto

Signals

Shortcomings

Module Summary



Exception Fundamentals

Exception Fundamentals

Exception Fundamentals



What are Exceptions?

Exception **Fundamentals**

- Conditions that arise
 - Infrequently and Unexpectedly
 - Generally betray a Program Error
 - Require a considered Programmatic Response
 - Run-time Anomalies ves. but not necessarily
- Leading to
 - Crippling the Program
 - May pull the entire System down
 - Defensive Technique



Exception Causes

Intructors: Abii Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Exception Fundamentals

Exception Stages
Error Handling in

C C Language Feature

RV & Params Local goto C Standard Library Support

Global Variables
Abnormal
Termination
Conditional
Termination
Non-Local goto

• Unexpected Systems State

 \circ Exhaustion of Resources

▷ Low Disk Space

Pushing to a Full Stack

External Events

o Ĉ

Socket Event

Logical Errors

Pop from an Empty Stack

o Resource Errors – like Memory Read/Write

• Run time Errors

Arithmetic Overflow / Underflow

Out of Range

Undefined Operation

Division by Zero



Exception Handling?

Exception **Fundamentals**

- Exception Handling is a mechanism that separates the detection and handling of circumstantial Exceptional Flow from Normal Flow
- Current state saved in a pre-defined location
- Execution switched to a pre-defined handler

Exceptions are C++'s means of separating error reporting from error handling

Biarne Stroustrup



Types of Exceptions

Types of Exceptions

• Asynchronous Exceptions:

- Exceptions that come Unexpectedly
- Example an Interrupt in a Program
- Takes control away from the Executing Thread context to a context that is different from that which caused the exception

• Synchronous Exceptions:

- Planned Exceptions
- Handled in an organized manner
- The most common type of Synchronous Exception is implemented as a throw



Exception Stages

Intructors: Abi Das and Sourangshu Bhattacharva

Weekly Reca

Exception
Fundamentals
Types of Exception
Exception Stages

Exception Stages

Error Handling in

C

RV & Params
Local goto
Standard Library
Support
Global Variables
Abnormal
Termination
Conditional
Termination
Non-Local goto
Signals

[1] Error Incidence

- Synchronous (S/W) Logical Error
- Asynchronous (H/W) Interrupt (S/W Interrupt)
- [2] Create Object & Raise Exception
 - An Exception Object can be of any Complete Type an int to a full blown C++ class object
- [3] Detect Exception
 - Polling Software Tests
 - Notification Control (Stack) Adjustments
- [4] Handle Exception
 - Ignore: hope someone else handles it, that is, Do Not Catch
 - Act: but allow others to handle it afterwards, that is, Catch, Handle and Re-Throw
 - Own: take complete ownership, that is, Catch and Handle
- [5] Recover from Exception
 - Continue Execution: If handled inside the program
- Abort Execution: If handled outside the program
 CS20202: Software Engineering Intructors: Abir Das and Sourangshu Bhattacharya



Exception Stages

```
Module 36
Intructors: Abi
Das and
Sourangshu
Bhattacharya
```

Weekly Recap

Objective & Outline

Exception Fundamentals

Types of Exceptions

Exception Stages

Error Handling in C

RV & Params
Local goto
C Standard Library
Support
Global Variables

Global Variables Abnormal

Termination
Conditional
Termination
Non-Local goto
Signals

```
int f() {
    int error;
   /* ... */
    if (error) /* Stage 1: error occurred */
        return -1; /* Stage 2: generate exception object */
    /* ... */
int main(void) {
    if (f() != 0) /* Stage 3: detect exception */
        /* Stage 4: handle exception */
    /* Stage 5: recover */
```



Error Handling in C

Error Handling in

Error Handling in C



Support for Error Handling in C

Intructors: Abi Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Fundamentals
Types of Exception
Exception Stages

Error Handling in C

RV & Params
Local goto
C Standard Library
Support
Global Variables
Abnormal
Termination
Conditional
Termination
Non-Local goto
Signals

- Support for Error Handling in C
 - C language does not provide any specific feature for error handling. Consequently, developers are forced to use normal programming features in a disciplined way to handle errors. This has led to industry practices that the developers should abide by
 - C Standard Library provides a collection of headers that can be used for handling errors in different contexts. None of them is complete in itself, but together they kind of cover most situations. This again has led to industry practices that the developers should follow
- Language Features
 - Return Value & Parameters
 - Local goto
- Standard Library Support
 - Global Variables (<errno.h>)
 - Abnormal Termination (<stdlib.h>)
 - Conditional Termination (<assert.h>)
 - Non-Local goto (<setjmp.h>)
 - o Signals (<signal.h>)



Return Value & Parameters

RV & Params

- Function Return Value Mechanism
 - Created by the Callee as Temporary Objects
 - Passed onto the Caller
 - Caller checks for Error Conditions
 - Return Values can be ignored and lost
 - Return Values are temporary
- Function (output) Parameter Mechanism
 - Outbound Parameters
 - Bound to arguments
 - Offer multiple logical Return Values



Example: Return Value & Parameters

```
Module 36
Intructors: Abii
Das and
Sourangshu
Bhattacharya
```

Weekly Recap

Objective & Outline

Exception Fundamentals

Error Handling in

C C Language Footness

RV & Params

C Standard Library Support

Global Variables
Abnormal
Termination

Conditional Termination Non-Local goto

```
int Push(int i) {
    if (top_ == size-1) // Incidence
        return 0; // Raise
   else
        stack_[++top_] = i;
   return 1:
int main() {
   int x;
   // ...
   if (!Push(x)) { // Detect
        // Handling
   // Recovery
```



Local goto

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Exception Fundamentals

Error Handling in

C Language Features

Local goto C Standard Library Support

Global Variable

Abnormal
Termination
Conditional
Termination
Non-Local goto
Signals

- Local goto Mechanism
 - o (At Source) *Escapes*: Gets Control out of a Deep Nested Loop
 - o (At Destination) *Refactors*: Actions from Multiple Points of Error Inception
- A group of C Features
 - goto Label;
 - o break continue;
 - o default switch case



Intructors: Abii Das and Sourangshu Bhattacharya

Weekly Recap

Objective & Outline

Fundamentals

Error Handling in

C C Language Features

RV & Params
Local goto
C Standard Library
Support
Global Variables
Abnormal

Global Variables
Abnormal
Termination
Conditional
Termination
Non-Local goto
Signals

```
_PHNDLR _cdecl signal(int signum, _PHNDLR sigact)
{ // Lifted from VC98\CRT\SRC\WINSIG.C
       /* Check for sigact support */
       if ( (sigact == ...) ) goto sigreterror;
        /* Not exceptions in the host OS. */
        if ( (signum == ... ) { ... goto sigreterror; }
   else { ... goto sigretok; }
        /* Exceptions in the host OS. */
       if ((signum ...)) goto sigreterror;
. . .
sigretok:
        return(oldsigact);
sigreterror:
        errno = EINVAL:
        return(SIG ERR):
```



```
PHNDLR __cdecl signal(int signum, PHNDLR sigact)
// Lifted from VC98\CRT\SRC\WINSIG.C
       /* Check for sigact support */
        if ( (sigact == ...) ) goto sigreterror;
        /* Not exceptions in the host OS. */
        if ( (signum == ... ) { ... goto sigreterror; }
       else { ... goto sigretok; }
        /* Exceptions in the host OS. */
        if ( (signum ...) ) goto sigreterror;
sigretok:
        return (oldsigact);
sigreterror:
        errno = EINVAL:
        return (SIG ERR);
```



```
PHNDLR cdecl signal (int signum, PHNDLR sigact)
 // Lifted from VC98\CRT\SRC\WINSIG.C
        /* Check for sigact support */
        if ( (sigact == ...) ) goto sigreterror;
        /* Not exceptions in the host OS. */
        if ((signum == ...) ... goto sigreterror; )
       else { ... goto sigretok; }
        /* Exceptions in the host OS. */
        if ( (signum ...) ) goto sigreterror;
sigretok:
        return (oldsigact);
sigreterror:
        errno = EINVAL:
        return (SIG ERR);
```



```
PHNDLR cdecl signal (int signum, PHNDLR sigact)
{ // Lifted from VC98\CRT\SRC\WINSTG.C
       /* Check for sigact support */
        if ( (sigact == ...) ) goto sigreterror;
        /* Not exceptions in the host OS. */
        if ( (signum == ... ) ... goto sigreterror; }
       else { ... goto sigretok; }
          Exceptions in the bost OS. */
             (signum ...) goto sigreterror;
sigretok:
        return (oldsigact);
sigreterror:
        errno = EINVAL:
        return (SIG ERR);
```



Global Variables

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Reca

Outline

Fundamentals

Exception Stages

Error Handling in

RV & Params
Local goto
C Standard Library
Support

Global Variables

Abnormal Termination Conditional Termination Non-Local goto Signals • GV Mechanism

- o Use a designated Global Error Variable
- o Set it on Error
- Poll / Check it for Detection
- Standard Library GV Mechanism
 - o <errno.h>/<cerrno>



Example: Global Variables

#include <errno.h>

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Recap

Objective &

Exception Fundamentals

Error Handling in

C C.L.

RV & Params
Local goto
C Standard Library
Support

Global Variables
Abnormal
Termination
Conditional
Termination
Non-Local goto

```
#include <math.h>
#include <stdio.h>
int main() {
    double x. v. result:
    /*... somehow set 'x' and 'v' ...*/
    errno = 0:
    result = pow(x, y);
    if (errno == EDOM)
        printf("Domain error on x/y pair n");
    else
        if (errno == ERANGE)
            printf("range error in result \n");
        else
            printf("x to the y = %d \ n", (int) result);
```



Abnormal Termination

Intructors: Abii Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Exception Fundamentals

Error Handling in

C Language Features
RV & Params
Local goto
C Standard Library
Support

Abnormal
Termination
Conditional
Termination
Non-Local goto
Signals

• Program Halting Functions provided by

o <stdlib.h>/<cstdlib>

- abort()
 - Catastrophic Program Failure
- exit()
 - Code Clean up via atexit() Registrations
- atexit()
 - Handlers called in reverse order of their Registrations



Example: Abnormal Termination

Intructors: Abi Das and Sourangshu Bhattacharya

Weekly Reca

Objective &

Exception Fundamentals

Error Handling in

C

RV & Params Local goto C Standard Library Support

Global Variables

Abnormal Termination Conditional Termination Non-Local goto Signals

```
#include <stdio.h>
#include <stdlib.h>
static void atexit handler 1(void) {
   printf("within 'atexit_handler_1' \n");
static void atexit_handler_2(void) {
   printf("within 'atexit handler 2' \n"):
int main() {
    atexit(atexit_handler_1):
    atexit(atexit handler 2):
    exit(EXIT SUCCESS):
   printf("This line should never appear \n");
   return 0:
within 'atexit_handler_2'
within 'atexit handler 1'
```



Conditional Termination

Intructors: Abii Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Exception Fundamentals

Types of Exception

Error Handling i

RV & Params
Local goto
C Standard Library
Support
Global Variables

Conditional Termination Non-Local got • Diagnostic ASSERT macro defined in

o <assert.h>/<cassert>

- Assertions valid when NDEBUG macro is not defined (debug build is done)
- Assert calls internal function, reports the source file details and then Terminates



Example: Conditional Termination

Module 26 Intructors: Ab Das and Sourangshu Bhattacharya Weekly Recap

Exception
Fundamentals

Error Handling in

C Language Features
RV & Params
Local goto
C Standard Library
Support
Global Variables
Abnormal

Abnormal
Termination

Conditional
Termination


Non-Local goto
Signals

```
/* Debug version */
//#define NDEBUG
#include <assert.h>
#include <stdlib.h>
#include <stdio.h>
/* When run - Asserts */
int main() { int i = 0:}
    assert(++i == 0): // Assert 0 here
    printf(" i is %d \n", i):
    return 0;
void _assert(int test, char const * test_image, char const * file, int line) {
    if (!test) { printf("assertion failed: %s, file %s, line %d\n", test_image, file, line):
        abort():
Assertion failed: ++i == 0, // On MSVC++
file d:\ppd\my courses...\codes\msvc\programming in modern c++\exception in c\assertion.c,
line 8
a.out: main.c:17: main: Assertion '++i == 0' failed. // On onlinegdb
CS20202: Software Engineering
                                               Intructors: Abir Das and Sourangshu Bhattacharva
```



Example: Conditional Termination (On MSVC++)

Conditional Termination

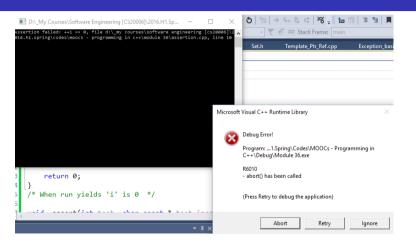



Example: Conditional Termination

Module 36 Intructors: Abi Das and Sourangshu Bhattacharya

Weekly Recap

Objective &

Exception Fundamentals

Exception Stages

Error Handling in

C C

RV & Params Local goto C Standard Library Support Global Variables

Termination

Conditional

Termination

Non-Local goto

#define NDEBUG #include <assert.h> #include <stdlib.h> #include <stdio.h> /* When run yields 'i' is 0 */ int main() { int i = 0: assert(++i == 0): // Assert 0 here printf(" i is %d \n", i): return 0: void _assert(int test, char const * test_image, char const * file. int line) { if (!test) { printf("assertion failed: %s, file %s, line %d\n", test_image, file, line); abort(); i is 0

/* Release version */



Non-Local goto

Intructors: Abii Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Fundamentals

Types of Exception

Error Handling in

RV & Params
Local goto
C Standard Library
Support
Global Variables
Abnormal

• setjmp() and longjmp() functions provided in <setjmp.h> Header along with collateral type jmp_buf

- setjmp(jmp_buf)
 - Sets the Jump point filling up the jmp_buf object with the current program context
- longjmp(jmp_buf, int)
 - Effects a Jump to the context of the jmp_buf object
 - Control return to setjmp call last called on jmp_buf



Example: Non-Local goto: The Dynamics

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Recap

Objective & Outline

Exception Fundamentals

Error Handling in

RV & Params
Local goto
C Standard Library

Global Variables

Conditional
Termination

Non-Local goto Signals

Caller

```
#include <stdbool.h>
#include <setjmp.h>

int main() {
    if (setjmp(jbuf) == 0) {
        printf("g() called\n");
        g();
        printf("g() returned\n");
}
```

printf("g() failed\n"):

Callee

```
jmp_buf jbuf;

void g() {
    bool error = false;
    printf("g() started\n");
    if (error)
        longjmp(jbuf, 1);
    printf("g() ended\n");
    return;
}
```

else

return 0:

#include <stdio.h>



Example: Non-Local goto: The Dynamics

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Recap

Objective & Outline

Fundamentals

Exception Stages

Error Handling in

C Language Features
RV & Params

Local goto

Standard Library
Support

Global Variables

Abnormal

Termination

Conditional

Termination

```
Conditional
Termination
Non-Local goto
Signals
Shortcomings
```

```
Caller Callee
```

```
int main() {
                                                   imp_buf ibuf:
    if (setjmp(jbuf) == 0) {
        printf("g() called\n");
                                                   void g() {
                                                       bool error = false:
        g();
        printf("g() returned\n");
                                                       printf("g() started\n");
                                                       if (error)
                                                           longimp(jbuf, 1);
    else
        printf("g() failed\n");
                                                       printf("g() ended\n"):
   return 0:
                                                       return:
```

(1) g() called

(2) g() successfully returned

```
g() called
g() started
g() ended
g() returned
```



Example: Non-Local goto: The Dynamics

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Recap

Objective & Outline

Fundamentals

Error Handling in

C Language Features
RV & Params
Local goto
C Standard Library
Support

C Standard Library Support Global Variables Abnormal Termination Conditional

Conditional
Termination

Non-Local goto
Signals
Shortcomings

```
Caller Callee
```

```
int main() {
                                                   imp_buf ibuf:
    if (setjmp(jbuf) == 0) {
        printf("g() called\n");
                                                   void g() {
                                                       bool error = true:
        g();
        printf("g() returned\n");
                                                       printf("g() started\n");
                                                       if (error)
                                                           longimp(jbuf, 1);
    else
        printf("g() failed\n");
                                                       printf("g() ended\n"):
   return 0:
                                                       return:
```

- (1) g() called
- (3) setjmp takes to handler

(2) longjmp executed

```
g() called
g() started
g() failed
```



#include <setjmp.h>

```
#include <stdio.h>
imp_buf j;
void raise exception() {
    printf("Exception raised. \n");
    longjmp(j, 1); /* Jump to exception handler */
    printf("This line should never appear \n"):
int main() {
    if (setimp(j) == 0) {
        printf("'setjmp' is initializing j. \n");
        raise exception():
        printf("This line should never appear \n");
    else
        printf("'setimp' was just jumped into. \n"):
        /* The exception handler code here */
    return 0 :
'setimp' is initializing i.
Exception raised.
'setjmp' was just jumped into.
CS20202: Software Engineering
```



Signals

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Fundamentals

Error Handling in

RV & Params
Local goto
C Standard Library
Support
Global Variables

Global Variables
Abnormal
Termination
Conditional
Termination
Non-Local goto

- Header < signal.h >
- raise()
 - Sends a signal to the executing program
- signal()
 - Registers interrupt signal handler
 - Returns the previous handler associated with the given signal
- Converts h/w interrupts to s/w interrupts



Example: Signals

Intructors: Abi Das and Sourangshu Bhattacharya

Weekly Recap

Objective &

Exception Fundamentals

Error Handling in

C Language Features RV & Params Local goto C Standard Library Support

Abnormal
Termination
Conditional
Termination
Non-Local goto
Signals

```
// Use signal to attach a signal
// handler to the abort routine
#include <stdio.h>
#include <stdlib.h>
#include <signal.h>
void SignalHandler(int signal) {
   printf("Application aborting...\n");
int main() {
    typedef void (*SignalHandlerPointer)(int);
    SignalHandlerPointer previousHandler;
    previousHandler = signal(SIGABRT, SignalHandler);
    abort():
   return 0:
Application aborting...
```



Shortcomings

Intructors: Abir Das and Sourangshu Bhattacharya

Weekly Reca

Objective & Outline

Fundamentals

Error Handling in

C Language Features
RV & Params
Local goto
C Standard Library
Support
Global Variables

upport
Global Variables
Abnormal
Termination
Conditional
Termination
Non-Local goto

Shortcomings

• Destructor-ignorant:

o Cannot release Local Objects i.e. Resources Leak

• Obtrusive:

Interrogating RV or GV results in Code Clutter

• Inflexible:

Spoils Normal Function Semantics

• Non-native:

Require Library Support outside Core Language



Module Summary

- Introduced the concept of exceptions
- Discussed error handling in C
- Illustrated various language features and library support in C for handling errors
- Demonstrated with examples