



Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

`std::exception`

Module Summary

Module 37: Programming in C++

Exceptions (Error handling in C++): Part 2

Instructors: Abir Das and Sourangshu Bhattacharya

Department of Computer Science and Engineering
Indian Institute of Technology, Kharagpur

{abir, sourangshu}@cse.iitkgp.ac.in

Slides taken from NPTEL course on Programming in Modern C++

by **Prof. Partha Pratim Das**



Module Recap

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives & Outlines

Exceptions in
C++

`try-throw-catch`

Exception Scope
(`try`)

Exception Arguments
(`catch`)

Exception Matching

Exception Raise
(`throw`)

Advantages

`std::exception`

Module Summary

- Introduced the concept of exceptions
- Discussed error handling in C
- Illustrated various language features and library support in C for handling errors
- Demonstrated with examples



Module Objectives

- Understand the Error handling in C++

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

`try-throw-catch`

Exception Scope
(`try`)

Exception Arguments
(`catch`)

Exception Matching

Exception Raise
(`throw`)

Advantages

`std::exception`

Module Summary



Module Outline

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- 1 Exceptions in C++
 - try-throw-catch
 - Exception Scope (try)
 - Exception Arguments (catch)
 - Exception Matching
 - Exception Raise (throw)
 - Advantages
 - std::exception

- 2 Module Summary



Exceptions in C++

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

Exceptions in C++



Expectations

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- Separate *Error-Handling code* from *Normal code*
- *Language Mechanism* rather than of the Library
- Compiler for *Tracking Automatic Variables*
- Schemes for *Destruction of Dynamic Memory*
- *Less Overhead* for the Designer
- *Exception Propagation* from the deepest of levels
- *Various Exceptions* handled by a single Handler



Error Handling Dynamics: C and C++

Header

Caller

Callee

C Scenario

```
#include <stdio.h>
#include <stdbool.h>
#include <setjmp.h>
```

```
int main() {
    if (setjmp(jbuf) == 0) {
        printf("g() called\n");
        g();
        printf("g() returned\n");
    }
    else printf("g() failed\n"); // On longjmp
    return 0;
}
```

```
jmp_buf jbuf;
void g() {
    bool error = false;
    printf("g() started\n");
    if (error)
        longjmp(jbuf, 1);
    printf("g() ended\n");
    return;
}
```

C++ Scenario

```
#include <iostream>
#include <exception>
using namespace std;
```

```
int main() {
    try {
        cout << "g() called\n";
        g();
        cout << "g() returned\n";
    }
    catch (Excp&) { cout << "g() failed\n"; }
    return 0;
}
```

```
class Excp: public exception {};
void g() {
    bool error = false;
    cout << "g() started\n";
    if (error)
        throw Excp();
    cout << "g() ended\n";
    return;
}
```



try-throw-catch

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

Caller

```
int main() {  
    try {  
        cout << "g() called\n";  
        g();  
        cout << "g() returned\n";  
    }  
    catch (Excp&) { cout << "g() failed\n"; }  
    return 0;  
}
```

(1) g() called

g() called
g() started
g() ended
g() returned

Callee

```
class Excp: public exception {};  
void g() {  
    bool error = false;  
    cout << "g() started\n";  
    if (error)  
        throw Excp();  
    cout << "g() ended\n";  
    return;  
}
```

(2) g() successfully returned



try-throw-catch

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

Caller

```

int main() {
    try {
        cout << "g() called\n";
        g();
        cout << "g() returned\n";
    }
    catch (Excp&) { cout << "g() failed\n"; }
    return 0;
}

```

(1) g() called

(5) Exception caught by catch clause
(6) Normal flow continues

Callee

```

class Excp: public exception {};
class A {};
void g() { A a;
    bool error = true;
    cout << "g() started\n";
    if (error)
        throw Excp();
    cout << "g() ended\n";
    return;
}

```

(2) Exception raised
(3) Stack frame of g() unwinds and destructor of a called
(4) Remaining execution of g() and cout skipped

g() called
g() started
g() failed



Exception Flow

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

```

#include <iostream>
#include <exception>
using namespace std;
class MyException: public exception { };
class MyClass { public: ~MyClass() { } };
void h() { MyClass h_a;
    //throw 1;                // Line 1
    //throw 2.5;              // Line 2
    //throw MyException();    // Line 3
    //throw exception();      // Line 4
    //throw MyClass();        // Line 5
} // Stack unwind, h_a.~MyClass() called
    // Passes on all exceptions
void g() { MyClass g_a;
    try { h();
        bool okay = true; // Not executed
    }
    // Catches exception from Line 1
    catch (int) { cout << "int\n"; }
    // Catches exception from Line 2
    catch (double) { cout << "double\n"; }
    // Catches exception from Line 3-5 & passes on
    catch (...) { throw; }
} // Stack unwind, g_a.~MyClass() called

```

```

void f() { MyClass f_a;
    try { g();
        bool okay = true; // Not executed
    }
    // Catches exception from Line 3
    catch (MyException) { cout << "MyException\n"; }
    // Catches exception from Line 4
    catch (exception) { cout << "exception\n"; }
    // Catches exception from Line 5 & passes on
    catch (...) { throw; }
} // Stack unwind, f_a.~MyClass() called

int main() {
    try { f();
        bool okay = true; // Not executed
    }
    // Catches exception from Line 5
    catch (...) { cout << "Unknown\n"; }

    cout << "End of main()\n";
}

```



try Block: Exception Scope

- **try** block
 - Consolidate areas that might throw exceptions
- function **try** block
 - Area for detection is the entire function body
- Nested **try** block
 - Semantically equivalent to nested function calls

Function **try**

```
void f()  
    try {  
        throw E();  
    }  
    catch (E& e) {  
    }
```

Nested **try**

```
try {  
    try { throw E(); }  
    catch (E& e) { }  
}  
catch (E& e1) {  
}
```

Note: The usual curly braces for the function scope are not to be put here



catch Block: Exception Arguments

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- **catch** block
 - Name for the Exception Handler
 - Catching an Exception is like invoking a function
 - Immediately follows the **try** block
 - Unique Formal Parameter for each Handler
 - Can simply be a Type Name to distinguish its Handler from others



try-catch: Exception Matching

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- **Exact Match**

- The catch argument type matches the type of the thrown object
 - ▷ *No implicit conversion is allowed*

- **Generalization / Specialization**

- The catch argument is a public base class of the thrown class object

- **Pointer**

- Pointer types – convertible by standard conversion



try-catch: Exception Matching

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- In the *order of appearance* with matching
- If Base Class `catch` block precedes Derived Class `catch` block
 - Compiler issues a warning and continues
 - Unreachable code (derived class handler) ignored
- `catch(...)` block must be the last `catch` block because it catches all exceptions
- If no matching Handler is found in the current scope, the search continues to find a matching handler in a dynamically surrounding `try` block
- *Stack Unwinds*
- If eventually no handler is found, `terminate()` is called



throw *Expression*: Exception Raise

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- *Expression* is treated the same way as
 - A *function argument* in a call or the *operand of a return* statement
- Exception Context
 - `class Exception { };`
- The *Expression*
 - Generate an Exception object to throw
 - ▷ `throw Exception();`
 - Or, Copies an existing Exception object to throw
 - ▷ `Exception ex;`
 - ▷ `...`
 - ▷ `throw ex; // Exception(ex);`
- *Exception object is created on the Free Store*



throw *Expression*: Restrictions

- For a UDT Expression
 - Copy Constructor and Destructor should be supported
- The type of Expression cannot be an incomplete type or a pointer to an incomplete type
 - No incomplete type like void, array of unknown size or of elements of incomplete type, Declared but not Defined struct / union / enum / class Objects or Pointers to such Objects
 - No pointer to an incomplete type, except void*, const void*, volatile void*, const volatile void*

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary



(re)-throw: Throwing Again?

- Re-throw

- `catch` may pass on the exception after handling
- Re-`throw` is not same as throwing again!

Throws again

```
try { ... }  
catch (Exception& ex) {  
    // Handle and  
    ...  
    // Raise again  
    throw ex;  
    // ex copied  
    // ex destructed  
}
```

Re-throw

```
try { ... }  
catch (Exception& ex) {  
    // Handle and  
    ...  
    // Pass-on  
    throw;  
    // No copy  
    // No Destruction  
}
```



Advantages

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- **Destructor-savvy:**
 - Stack unwinds; Orderly destruction of Local-objects
- **Unobtrusive:**
 - Exception Handling is implicit and automatic
 - No clutter of error checks
- **Precise:**
 - Exception Object Type designed using semantics
- **Native and Standard:**
 - EH is part of the C++ language
 - EH is available in all standard C++ compilers



Advantages

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

std::exception

Module Summary

- **Scalable:**

- Each function can have multiple try blocks
- Each try block can have a single Handler or a group of Handlers
- Each Handler can catch a single type, a group of types, or all types

- **Fault-tolerant:**

- Functions can specify the exception types to throw; Handlers can specify the exception types to catch
- Violation behavior of these specifications is predictable and user-configurable



Exceptions in Standard Library: `std::exception`

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

`std::exception`

Module Summary

All objects thrown by components of the standard library are derived from this class. Therefore, all standard exceptions can be caught by catching this type by reference.

```
class exception {  
public:  
    exception() throw();  
    exception(const exception&) throw();  
    exception& operator=(const exception&) throw();  
    virtual ~exception() throw();  
    virtual const char* what() const throw();  
}
```

Sources: `std::exception` and `std::exception` in C++11, C++14, C++17 & C++20



Exceptions in Standard Library: `std::exception`

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)


Exception Matching

Exception Raise
(throw)

Advantages

`std::exception`

Module Summary

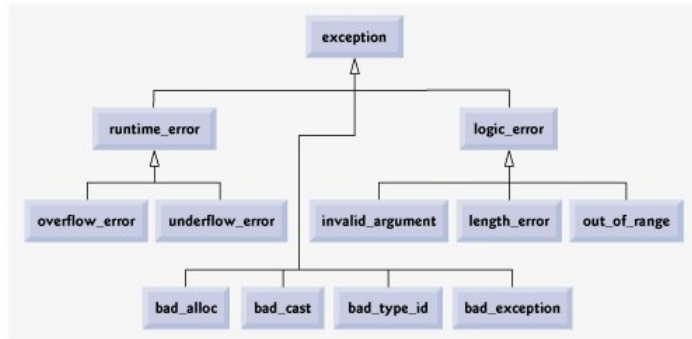

Sources: [Standard Library Exception Hierarchy](#)



Exceptions in Standard Library: `std::exception`

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

`std::exception`

Module Summary

- **logic_error**: Faulty logic like violating logical preconditions or class invariants (may be preventable)
 - **invalid_argument**: An argument value has not been accepted
 - **domain_error**: Situations where the inputs are outside of the domain for an operation
 - **length_error**: Exceeding implementation defined length limits for some object
 - **out_of_range**: Attempt to access elements out of defined range
- **runtime_error**: Due to events beyond the scope of the program and can not be easily predicted
 - **range_error**: Result cannot be represented by the destination type
 - **overflow_error**: Arithmetic overflow errors (Result is too large for the destination type)
 - **underflow_error**: Arithmetic underflow errors (Result is a subnormal floating-point value)
- **bad_typeid**: Exception thrown on typeid of null pointer
- **bad_cast**: Exception thrown on failure to dynamic cast
- **bad_alloc**: Exception thrown on failure allocating memory
- **bad_exception**: Exception thrown by unexpected handler

Sources: `std::exception` and `std::exception` in C++11, C++14, C++17 & C++20



Exceptions in Standard Library: `std::exception`: C++98, C++11, C++14, C++17 & C++20

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

try-throw-catch

Exception Scope
(try)

Exception Arguments
(catch)

Exception Matching

Exception Raise
(throw)

Advantages

`std::exception`

Module Summary

- `logic_error`
 - `invalid_argument`
 - `domain_error`
 - `length_error`
 - `out_of_range`
 - `future_error` (C++11)
- `bad_optional_access` (C++17)
- `runtime_error`
 - `range_error`
 - `overflow_error`
 - `underflow_error`
 - `regex_error` (C++11)
 - `system_error` (C++11)
 - ▷ `ios_base::failure` (C++11)
 - ▷ `filesystem::filesystem_error` (C++17)
 - `txtion` (TM TS)
 - `nonexistent_local_time` (C++20)
 - `ambiguous_local_time` (C++20)
 - `format_error` (C++20)
- `bad_typeid`
- `bad_cast`
 - `bad_any_cast` (C++17)
- `bad_weak_ptr` (C++11)
- `bad_function_call` (C++11)
- `bad_alloc`
 - `bad_array_new_length` (C++11)
- `bad_exception`
- `ios_base::failure` (until C++11)
- `bad_variant_access` (C++17)



Module Summary

Module 37

Instructors: Abir
Das and
Sourangshu
Bhattacharya

Objectives &
Outlines

Exceptions in
C++

`try-throw-catch`

Exception Scope
(`try`)

Exception Arguments
(`catch`)

Exception Matching

Exception Raise
(`throw`)

Advantages

`std::exception`

Module Summary

- Discussed exception (error) handling in C++
- Illustrated `try-throw-catch` feature in C++ for handling errors
- Demonstrated with examples