

## **The Serious Need For Data**

### **Introduction:**

For many years, this blog has aspired to give accurate information clearly. It has not been perfect. But, it has been fun. Posts have answered key questions, explained obscure references and offered context. The quality is high. Some posts took months to compose. You should read them.

However, we are reaching the limits of mere theory. We need to build it. We need to test it. The Polywell has not failed or worked - yet. We just don't know. We need a body of data - from a big machine. The Navy could save us some hassle by publishing.

The Polywell is a real plasma system. It will face real problems; like energy loss, power balance, instabilities and control issues. No one knows if these problems can kill the polywell. We have to try.

### **News:**

Events around the polywell continued to move forward, in the last half of 2013. In June, NBC news spoke with Taylor Wilson about his homemade fusion reactor [30]. His fusor is similar to a polywell. NBC's Brian Williams call Taylor: "incredible". This press is exciting. It should help fund fusion research. Also that month, the first polywell doctoral thesis was published [28]. At the core of this work, was data of trapped electrons inside a polywell. The work is strong; but it is limited to small, low power devices.

In October, the University of Sydney published again [29]. The team simulated electrons inside the polywell. The group wanted to know how long electrons would be confined – and where they were. Variables were then changed: the current, ring radius, and starting particle energy. Simulations revealed that the devices' behavior improved as it got bigger [29]. But, simulations are still not data. This work was presented at the 15<sup>th</sup> annual IEC conference in Kyoto, Japan [33]. In October, a polywell startup: Convergent Scientific Incorporated did its first investor call. They claim to have measured electron trapping, built a fusor/polywell hybrid and have numerical simulations running. This post examines some of these claims. The company wants to raise a million dollars for non-breakeven devices.

In November, the Polywell was included at the MIT co-lab conference [34]. Thanks to Dennis Peterson for making this happen. The following week, polywell work was presented at the 2013 APS conference in Denver, Colorado [35]. Jeff Kollasch - a new graduate student at Wisconsin - presented Vlasov-Poisson simulations of the polywells. Hopefully - this work will become another science publication. Also in November, a second polywell novel by William Flint: "To fly from folly: saving

the polywell” went live on amazon [36]. In December, Dr. George Miley published the first IEC textbook [33]. This is a milestone. Our field now has a textbook! Miley has been busy. His autobiography was also published in June [32]. The book documents his life and over five decades of fusion research.

In addition, two organizations have joined polywell/fusor space. The first is the North West Nuclear Consortium. Carl Greninger - a manager at Microsoft; has created a high school physics class on fusors [37]. A group of 18 students and 4 instructors meet every Friday to do real nuclear fusion at Mr. Greningers’ home [38]. This has generated a lot of press and awards at science fairs. The other is Radiant Matter Research. This pair of Dutch students has the equipment and is on the path to building a polywell. This activity is exciting; but it is no substitute for real hard data.

### **Executive Summary:**

This post examines a new design from Convergent Scientific Incorporated. The case for an open effort is made - by examining the result of a closed effort. CSI was founded in 2010, in Washington State. Presentations in the fall of 2013 offered some insight into their work. CSI is simultaneously doing CUDA simulations and running multiple experiments. For income, their goal is to make and sell medical isotopes. They have built an octahedron confinement grid: model one. Good magnetic design is discussed including: field uniformity, continuousness, symmetry, low curvature and non-intersections. The strengths and weakness of a “single-turn” cage are mentioned. The geometry and magnetic field is examined at the corners, center and cage surface. A device - 14 cm a side with 1,500 amps and a 1,000 gauss field at the corners – is assumed to be model one. Analysis reveals that the field strength falls as size increases, the field rises linearly with current and the corner field is sensitive to the shape of the bends. Finally, an ideal geometry for a uniform field is mentioned.

### **A History Lesson:**


In 1999, a man named Alex Klein got an idea. His idea was to internally reflect ion beams [13]. The reflection was based off of magnetic mirror work from Israel [10]. Beams bounce around inside, collide and fuse. Klein worked on his idea for 10 years – getting a PhD, publishing and pitching it to a venture capitalist [11]. He saw this idea as having great value - so he strove to hide it from the public. After raising 3 million dollars, building a company and his reactor - it failed. The problem [11] was: “...the ions slowed down in the mirrors, wasting time there, leading to high losses...” Unfortunately few people knew about this effort. When the company folded, no one was trying to duplicate Kleins’ work. Worst still: some people have purposed to repeat his idea. In fact beam schemes had already been patented in the eighties [18, 19, 20].

### **A Call for Openness:**

Fusion is hard. No one has a solution for it yet. A common mistake people make, is thinking that they have the solution. They often try and hide it, patent it or conceal it. We argue: that this is a mistake. After working for ten years on a solution - only to hit a brick wall – if the work has not been made public, then it has been wasted. It is critical that these efforts are open. Only an open effort can be taken seriously by the public. Openness means explaining ideas, problems and failures. It means admitting if this fails. It also means educating a supporting community. It limits repeating bad ideas and helps create a market. Being open means explaining everything in simple English and correcting mistakes when they are found. Hiding behind an NDA, IP, jargon and obscure references is not being open.

### **Convergent Scientific:**

Convergent Scientific was founded in 2010, in Washington State. The company has two physicists behind it: Devlin Baker and Dr. Joel Rogers. Each has deep roots in this field. Devlin started out building his own fusors in 2001 [1]. Dr. Rogers has been studying nuclear physics at a national laboratory his entire career [1]. Joel has presented at every single IEC conference since 2008 and was in contact with Dr. Bussard while he was still alive [2, 3, 4].

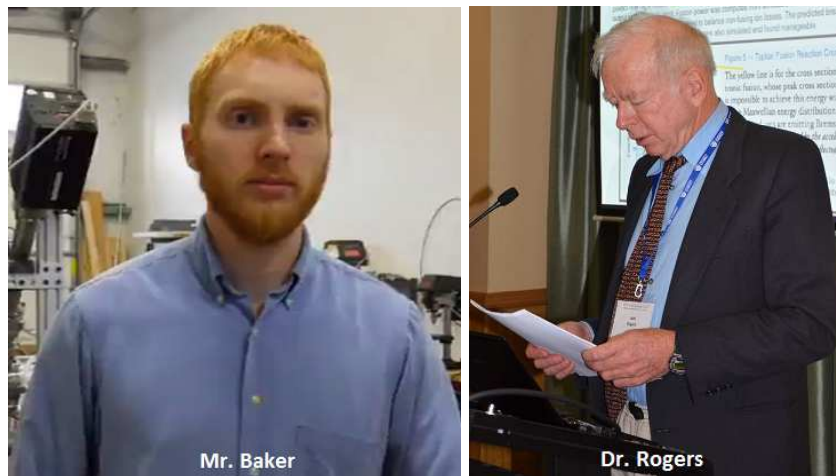


Unfortunately, CSI has yet to get a patent. Convergent has been in a legal fight with the U.S. Patent Office since 2008 [7, 5]. The paperwork is ugly. Dr. Rogers tried to patent a power plant design with only simulations as supporting evidence. Naturally, the examiners do not believe him. One examiner explained [8]: “...Energy production though fusion reactions have not been achieved to date, let alone at the time of filing, despite a world-wide fusion energy research program...” CSI needs data, to get a patent.

### **Investor Call:**

In the fall of 2013, Convergent Scientific did its first investor call. This consisted of web presentations posted online. These are: “The Physics of IEC devices”,


“Numerical simulations of IEC plasmas” and “commercial applications of IEC devices.” These talks are intense. Mr. Baker had to cover a great deal of material in a very short amount of time. Overall, the presentations felt jerky. He spends plenty of time on boring subjects, but breezes through topics of interest. It is also codified in technical language that is hard to follow. It appears the company is following a two pronged strategy: building machines and simulating polywells. They have assembled a serious lab space.

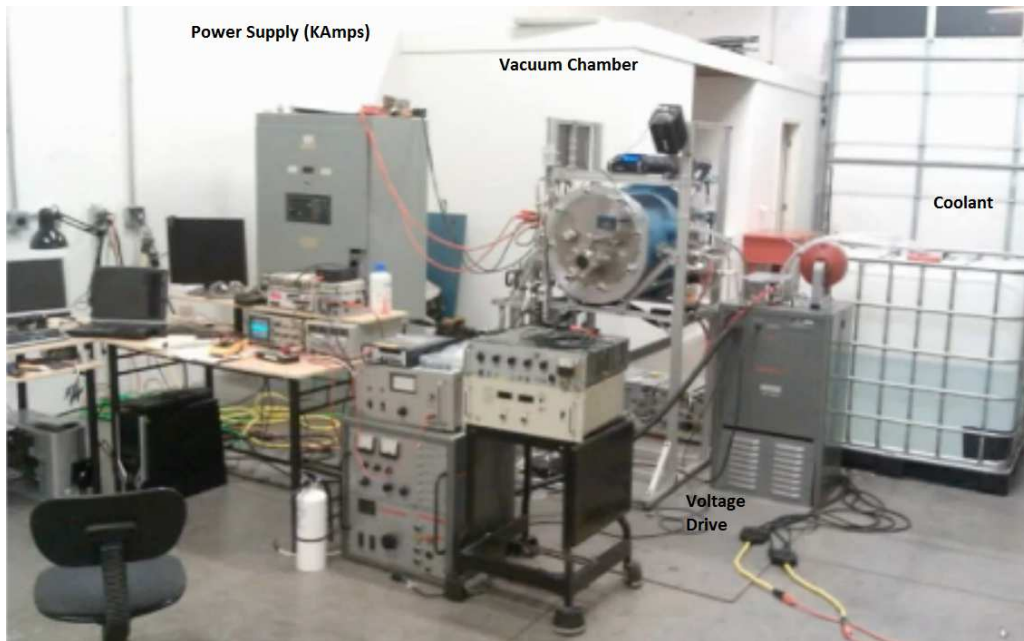



### **Field Redesign:**

People have long wondered about redesigning the containing magnetic field. They argue that the magnetic mirror effect is independent of direction. The mirror will reflect particles when they move into denser fields [10]. This happens only under certain conditions; but it will happen regardless of if the field points one way, or the other [23]. Redesigning has been a source of much speculation. At last check, over 850 posts online debated different designs [15, 9]. Endolith, an electrical engineer, has argued for the new design of an 8-sided spherical cage [16]. Alternative designs have even been patented - going back to the 1980's [18, 19, 20]. Some designs are shown below.

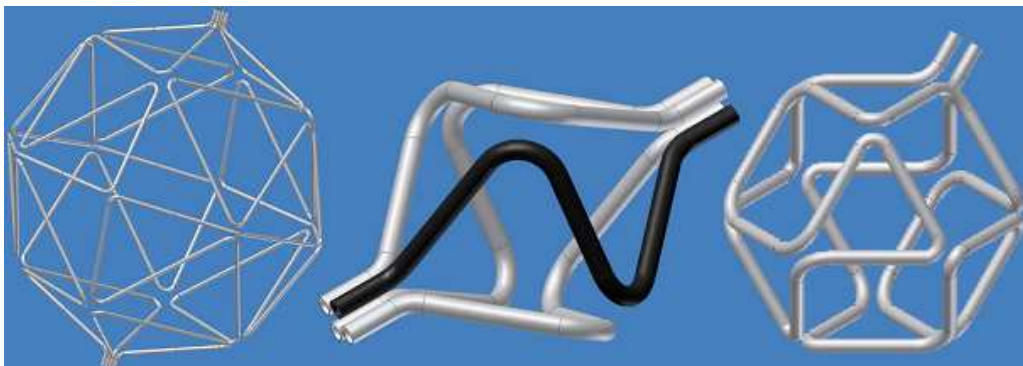




## Keys to “Good” Fields:

In reality, many magnetic field designs will fail. They look good on paper, but in reality will fail to hold in particles. Failure hinges on the structure of magnetic fields inside. We do not understand everything about magnetic containment. However, there are some principals that can be used to gage good designs:

1. **Uniform Strength:** Electrons in the center should see uniform field strength in all directions. This is like water held in a pool. The walls of the pool must be the same height. This was the driving force behind WB6– the ring location forced the corners and the sides to have equal field strength [24].
2. **Continuous Fields:** None of the fields must run into a metal surface. This drives up conduction losses and was the reason for HEPS failure.
3. **Not Intersecting:** Fields which stream particles past one another - lead to counter-streaming, two stream and sheet-sheet instabilities [27].
4. **Low Curvature:** Bent fields, fling plasma outward, leading to conduction losses [26]. This effect worsens with tighter curvature.
5. **Symmetry:** Symmetry has been true throughout most of magnetic confinements' history. In polywells, this means that the same fields cannot butt up against each other. An inward pointed field cannot be next to another inward pointed field. This is shown best with two simple geometries: six rings in a cube and an eight sided diamond. See blow. Notice that no red surfaces meet. Each design can be expanded by adding more rings or loops.

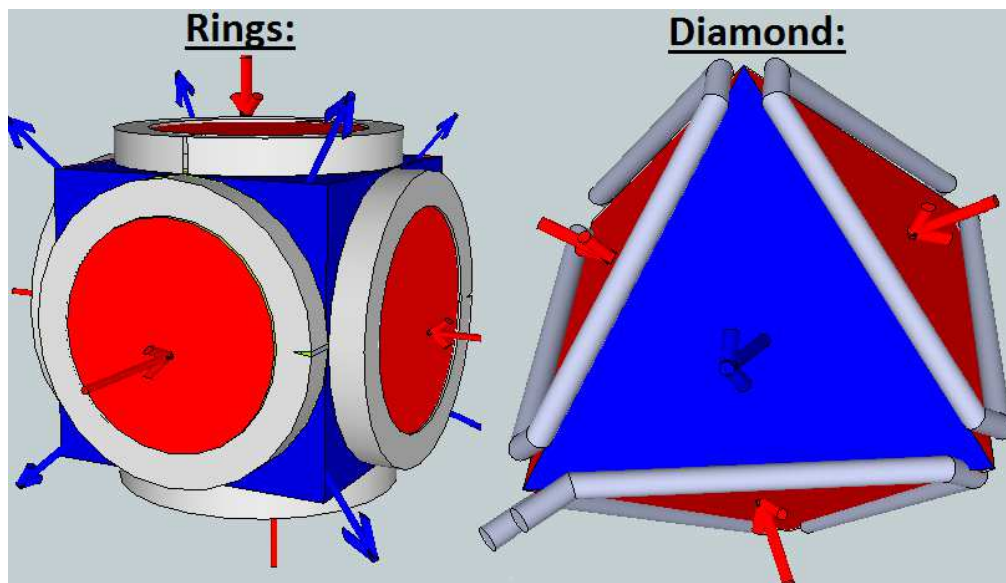


You can see why the tokamak is so celebrated. Its design follows these rules. Hopefully, we can find another field that works. Bussard patented this diamond

configuration in 1989 because he wanted to try it [21, 22]. CSI has built this. They say they have run current through it and, trapped electrons within it [17].

### **Model 1:**

This design is known as model 1. It is very odd looking, when compared with the ring structure. First, it is made only by one wire; it is a “single turn” magnet. The change has tradeoffs. It hurts the device, because it requires hundreds of times more current to get the same fields. But, it helps the device, because it reduces the amount of extra surfaces (struts, connectors, feed lines) in the center. The wire bends are notable. It is likely - that the most interesting and problematic physics occurs there.

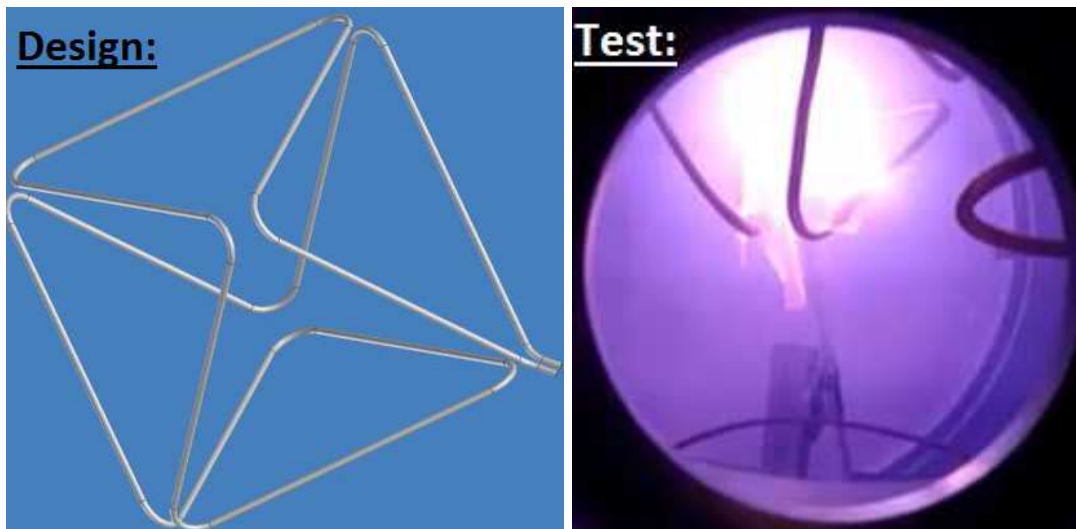


CSI has said that several experiments were attempted. These included several materials, such as copper and tungsten [6]. Some designs included cooling tubes inside (which gave poorer performance) [14] and it is possible that geometries beyond the octahedron were attempted. In addition, a polywell/fusor hybrid was also tested. The company will not disclose the exact dimensions of model 1. However, from the parameters provided in their presentations [6] and on their website [23], we can discern a range of sizes.


### **Basic Math:**

You can define the geometry with four variables. The first is the length of one side of the diamond. CSI lists the plasma as having a volume of  $1.4\text{E-}3$  cubic meters [23]. If this is the total volume inside the cage; then model one is fourteen centimeters per side. Alternatively, they give an average confinement radius of 16 centimeters [23]. If this is the average distance from cage to device center then model one is twenty-six centimeters per side. The next two variables describe the bend. The first is the length of wire involved in the bend. The second is the smallest gap between two bent wires. It is this gap which drives the magnetic field at the corner. The last variable is the

thickness of the copper wire. These four variables will completely describe the geometry.

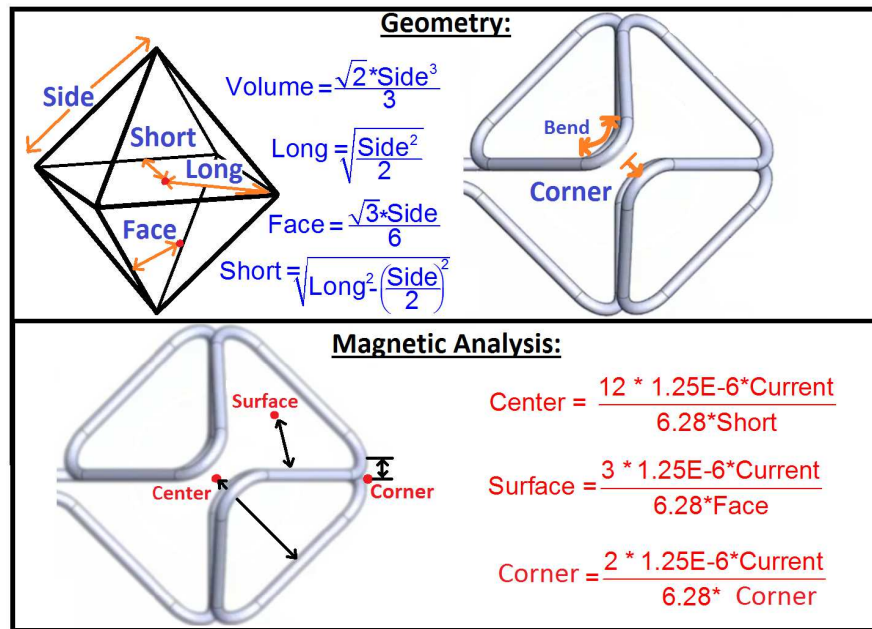


With the geometry defined, analyzing the magnetic field around the diamond is easy. Analysis is done by applying the Biot-Savart law to different locations [25]. The strongest field occurs at the corners. At the corner, two wires come very close together. This is similar to the joint in normal polywells. CSI gives the strongest field as 1,000 Gauss, at 1,500 amps [22]. Using this, the bend variables can be found. The next location is device center. The field here is generated by twelve wires. The weakest field is located on the surface of the diamond. The field here is created by three wires. A comparison of these three locations is plotted below.

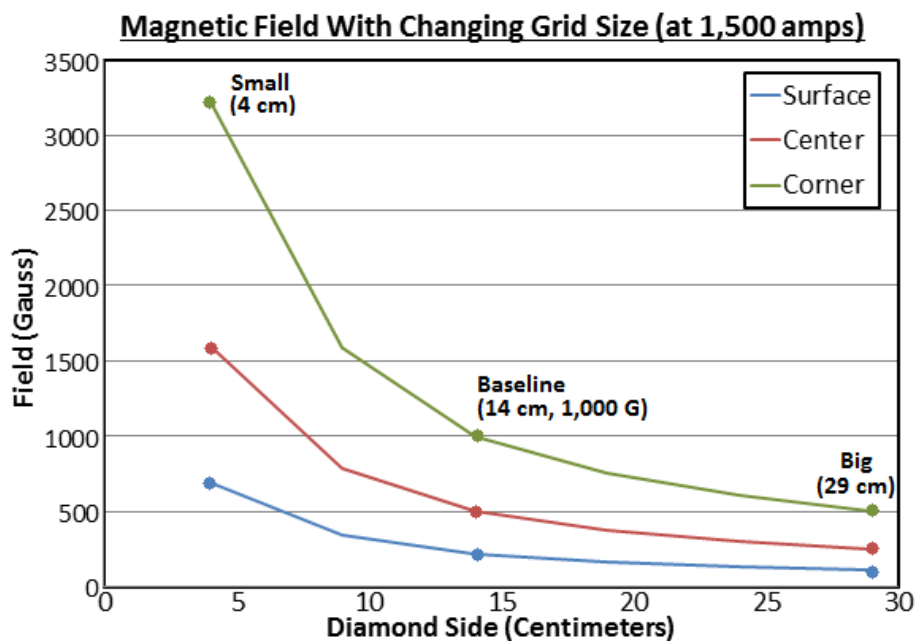




### Corner Field As Distance Rises (1,500 Amps):

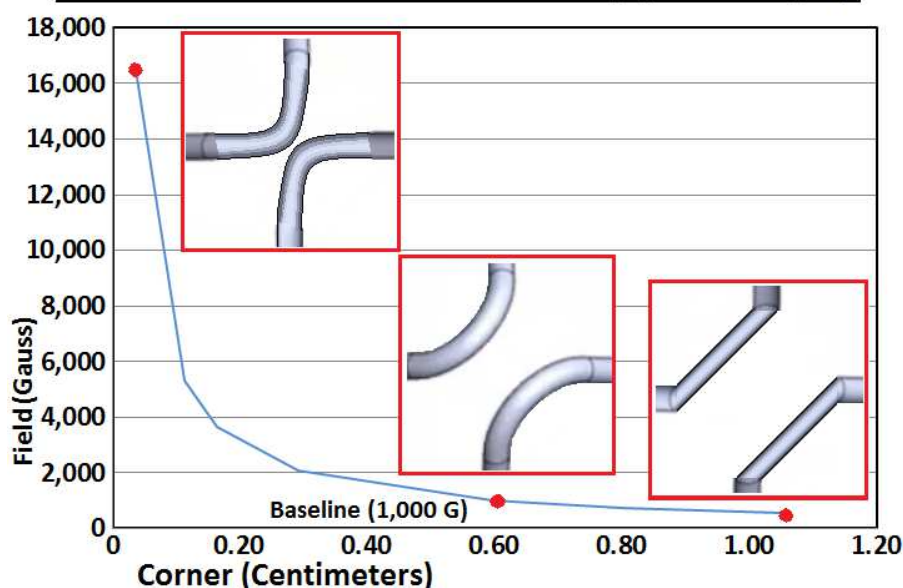


### Field Design:

These equations say plenty about how to design the perfect field. A big issue with the diamond grid is that it is a single wire. It may be possible to snake many wires together inside the grid; but if it remains “single turn”, low field strength should be a concern. These equations say much about getting around that problem. First, as the diamond gets bigger, the field strength drops exponentially. Next, the field strength rises linearly with current. Finally, the highest field is at the corners - and here, it is very sensitive to the shape of the bends. The corner field varies wildly. This gives designers a lot of flexibility. Their goal could be to get the surface and corner fields equal. This was the principal used in designing WB6 and may significantly help containment. The optimum geometry for this is when the face distance is 1.5 times the corner distance. This design is shown below. Finally, by assuming a current direction - we can quickly determine the vector field. This is also shown below.

### Ideal Grid Design For Uniform Magnetic Field:

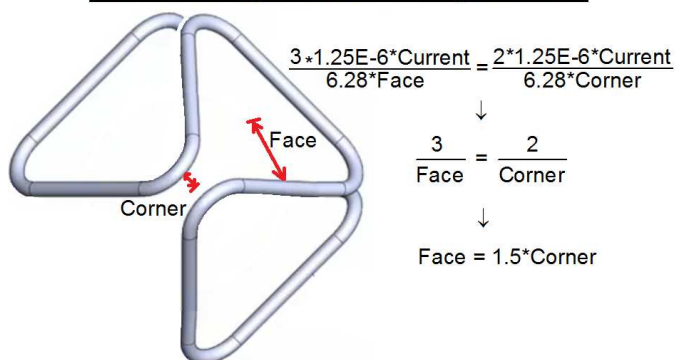

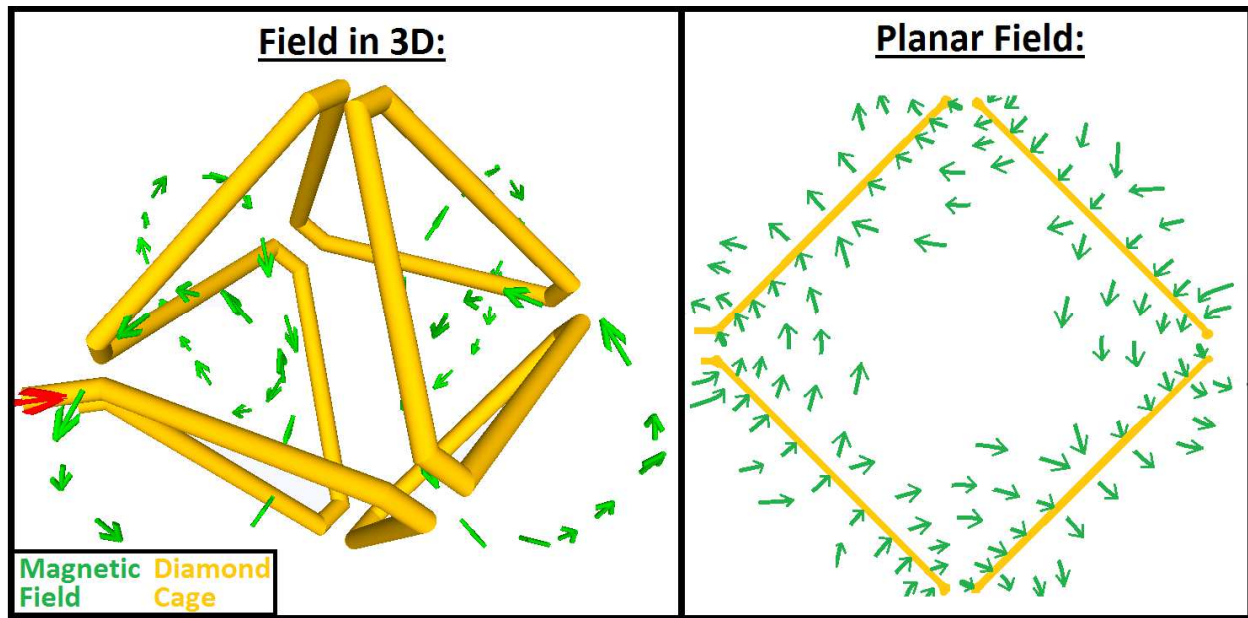

#### Work Cited:

1. Baker, Devlin. "Convergent Scientific Inc." <https://gust.com/c/convsci>. Gust LLC, Dec. 2013. Web. 4 Jan. 2014.
2. Rusi, Toni. "Fusion with Space Related Aspects Thread." Fusion with Space Related Aspects Thread. NASA, 4 June 2007. Web. 04 Jan. 2014.
3. Rogers, Joel. "IEC2008 10th US-Japan Workshop on Inertial Electrostatic Confinement Fusion - Uji, Kyoto." IEC2008 10th US-Japan Workshop on Inertial Electrostatic Confinement Fusion - Uji, Kyoto. Kyoto University, 9 Dec. 2008. Web. 04 Jan. 2014.
4. Rogers, Joel. "Steady State Polywell Fusion Device Designed Using 2D Simulation." *The 10th Annual US-Japan IEC Conference*. Kyoto University, 4 Dec. 2008. Web. 04 Jan. 2014. <<http://www.iae.kyoto-u.ac.jp/beam/iec2008/abstracts/We10Rogers.pdf>>.
5. Rogers, Joel. Application: Modular Apparatus for Confining Plasma. Patent 2010/0284501. N.d. Print.
6. *Physics of IEC Devices*. Perf. Devlin Baker. Convergent Scientific Inc., Oct 22, 2013. <http://sproutvideo.com/videos/1c9bd8bd171be4c994>
7. Pair database. <http://portal.uspto.gov/pair/PublicPair> Rogers, Joel. Application: 12/141,644 Modular Apparatus For Confining A Plasma. Patent 2010/0284501.
8. United States of America. US Department of Commerce. Patent Office. *Final Rejection 12/141,644*. Page 6. By Johannes P. Mondt. Washing DC: USPO, 2013. Print.

9. "Talk-Polywell.org." *Magrid Configuration Brainstorming*. Talk Polywell, 9 Nov. 2007. Web. 04 Jan. 2014. <<http://www.talk-polywell.org/bb/viewtopic.php?p=5747>>
10. Allen, Ronald J. "A Demonstration of the Magnetic Mirror Effect." *American Journal of Physics* 30.12 (1962): 867. Print.  
<http://www.beamfusion.org/technology/index.html>
11. "Discussion MIX and Marble." Interview of Dr. Alex Klein. 30 Apr. 2013. Interview.
12. "MARBLE-1 the Multiple Ambipolar Recirculating Beam Line Experiment" Alex Klein Poster presentation, 2011 US-Japan IEC conference.
13. Devlin baker, private communication, 1-2-2014
14. "Talk-Polywell.org." *Magrid Configuration Brainstorming*. Talk Polywell, 9 Nov. 2007. Web. 04 Jan. 2014. <<http://www.talk-polywell.org/bb/viewtopic.php?t=289>>.
15. Endolith. "Would an Octahedral Magnet Work as a Magnetic Bottle?" *Plasma Physics*. Stack Exchange, 20 Aug. 2013. Web. 04 Jan. 2014.  
<<http://physics.stackexchange.com/questions/74751/would-an-octahedral-magnet-work-as-a-magnetic-bottle>>.
16. *Numerical Simulations of IEC Plasmas*. Performed: Devlin Baker. Convergent Scientific Inc. Nov 5, 2013. <<http://sproutvideo.com/videos/e89bd8bd1314edca60>>
17. Converging Beam Fusion System. William Jarnagin, assignee. Patent 4202725. 13 May 1980. Print.
18. Apparatus for Colliding Nuclear Particle Beams Using Ring Magnets. John P Blewett, assignee. Patent 5034183. 23 May 1989. Print.
19. Method for Forming Magnetic Fields. Stephen A Whitlock, assignee. Patent 5517083. 21 Dec. 1996. Print.
20. "Should Google Go Nuclear?" R.W. Bussard. Google Videos. 9 Nov. 2006. 20 Feb. 2009.
21. Method and Apparatus for Controlling Charged Particles. Robert Bussard, assignee. Patent 4826646. 29 Oct. 1989. Print.
22. Blair, Clarke. *CSI Overview*. Bellingham Washington: Convergent Scientific, 2013. Print. <[http://convsci.com/sites/default/files/csi\\_executive-summary.pdf](http://convsci.com/sites/default/files/csi_executive-summary.pdf)>

23. "Mirror Systems: Fuel Cycles, loss reduction and energy recovery" by Richard F. Post, BNES Nuclear fusion reactor conferences at Culham laboratory, September 1969.
24. "The Polywell Blog." *The Physical Basis for the Polywell*. The Polywell Blog, 30 July 2012. Web. 04 Jan. 2014. <<http://thepolywellblog.blogspot.com/2012/07/the-physical-basis-for-polywell.html>>.
25. "Biot–Savart Law." *Wikipedia*. Wikimedia Foundation, 01 Mar. 2014. Web. 05 Jan. 2014. <[http://en.wikipedia.org/wiki/Biot%E2%80%93Savart\\_law](http://en.wikipedia.org/wiki/Biot%E2%80%93Savart_law)>.
26. L. I. Rudakov and R. Z. Sagdeev, DAN SSSR 138, 581 (1961), Soviet Phys. Doklady 6, 415 (1961). Nuclear Fusion, Supplement 2, 1962, p. 481.
27. Bittencourt, J. A. *Fundamentals of Plasma Physics*, Third Ed. 2004 Springer-Verlag, New York.
28. Carr, Matthew. *Electrostatic Potential Measurements and Point Cusp Theories Applied to a Low Beta Polywell Fusion Device*. Diss. University of Sydney, 2013. Sydney: University of Sydney, 2013. Print..
29. Gummersall, David. "Scaling Law of Electron Confinement in a Zero Beta Polywell Device." *Physics of Plasmas* 20.10 (2013): 102701-02701-7. Print.
30. Williams, Brian. "19-year-old Hopes to Revolutionize Nuclear Power." *NBCNews.com*. NBC/Universal, 14 June 2013. Web. 05 Jan. 2014. <<http://www.nbcnews.com/video/rock-center/52207962>>.
31. Miley, George H. *Life at the Center of the Energy Crisis: A Technologist's Search for a Black Swan*. Washing DC: N.P., 2013. Print.
32. Miley, George. *Inertial Electrostatic Confinement (IEC) Fusion: Fundamentals and Applications*. Illinois: N.P., 2013. Print.
33. "Towards a virtual cathode for inertial electrostatic confinement." Joe Khachan, 15<sup>th</sup> annual 2013 US-Japan IEC workshop, Kyoto University, October 6, 2013.
34. Petersen, Dennis. *2013 MIT Co-Lab Conference Proposals*. 2 Nov. 2013. It's the 21st Century. Where's My Fusion Reactor? Massachusetts Institution of Technology, Boston.
35. Kollasch, Jeff. *Vlasov-Poisson Calculations of Electron Confinement times in Polywell Devices Using a Steady-state Particle-in-cell Method*. Proc. of 2013 APS Division of Plasma Physics Conference, Marriott Hotel, Denver. Denver: APS, 2013. Print.
36. Flint, William. *To Fly from Folly: Saving the Polywell*. San Francisco: Amazon, 2013. Online.

37. "Mr. Fusion Helps Students Build a Nuclear Reactor." *Mr. Fusion Helps Students Build a Nuclear Reactor*. Microsoft Inc., 17 Aug. 2011. Web. 05 Jan. 2014.  
<<http://www.microsoft.com/en-us/news/features/2011/aug11/08-17fusion.aspx>>.
38. "Personal Interview." Interview of Carl Greninger. 17 Dec. 2013.