

Bandit Wargame Documentation

Name: Shyam Tripathi

Task Name: Bandit Wargame Levels 0–10

Introduction

The Bandit wargame, hosted by OverTheWire, is designed to teach basic Linux and command-line skills through a series of challenges. Each level requires retrieving a password stored on the system in creative ways, which then allows access to the next level.


Steps to Solve Levels 0–10

Level 0 → Level 1

Objective: Log in to the Bandit server and find the password for the next level.

Commands Used:

- `ssh bandit0@bandit.labs.overthewire.org -p 2220`
 - **Purpose:** Securely log into the Bandit server using SSH with the username `bandit0` on port 2220.

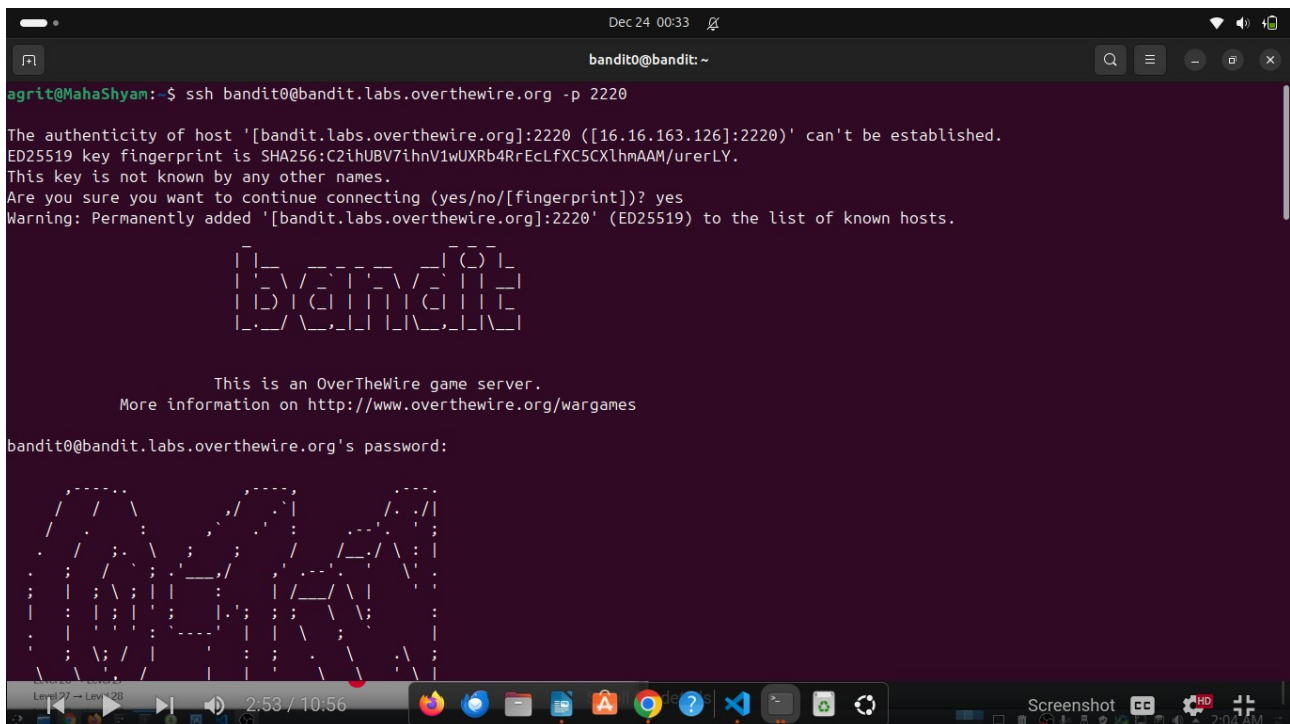A screenshot of a terminal window on a Linux desktop. The terminal shows the command `ssh bandit0@bandit.labs.overthewire.org -p 2220` being executed. It displays the SSH warning about the host's authenticity, followed by the ASCII art logo for OverTheWire. Below the logo, it says "This is an OverTheWire game server. More information on http://www.overthewire.org/wargames". Then it prompts for the password: "bandit0@bandit.labs.overthewire.org's password:". The desktop background is dark, and the terminal has a dark purple theme. The system tray at the bottom shows various icons and the time 2:04 AM.

Password: `bandit0` (provided by the game).

Key Learning: Securely connecting to remote servers using SSH

```
Dec 24 00:34
bandito@bandit: ~
--[ More information ]--

For more information regarding individual wargames, visit
http://www.overthewire.org/wargames/

For support, questions or comments, contact us on discord or IRC.

Enjoy your stay!

bandit0@bandit:~$ ls -alps
total 24
4 drwxr-xr-x  2 root   root   4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root   root   4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root   root    220 Mar 31 2024 .bash_logout
4 -rw-r--r--  1 root   root  3771 Mar 31 2024 .bashrc
4 -rw-r--r--  1 root   root    807 Mar 31 2024 .profile
4 -rw-r----- 1 bandit1 bandit0 438 Sep 19 07:08 readme
bandit0@bandit:~$ cat readme
Congratulations on your first steps into the bandit game!!
Please make sure you have read the rules at https://overthewire.org/rules/
If you are following a course, workshop, walkthrough or other educational activity,
please inform the instructor about the rules as well and encourage them to
contribute to the OverTheWire community so we can keep these games free!

The password you are looking for is: ZjLjTmM6FvvyRnrb2rfNWOZOTa6ip5If

bandit0@bandit:~$ ^C
bandit0@bandit:~$
```

Get Level-1 Password : Use Command to “cat readme”

Level-1 Password: ZjLjTmM6FvvyRnrb2rfNWOZOTa6ip5If

Exit the level-0 : Use the exit command.

Level 1 → Level 2

Objective: Retrieve the password from a file named readme.

Commands Used:

- `ls`
 - **Purpose:** List the files in the current directory.
- `cat ./-`
 - **Purpose:** Display the contents of the file to retrieve the password.

Level-2 Password: 263JGJPfgU6LtDEvgfWU1XP5yac29mFx.

Exit Level 1: Use the `exit` command.

```
bandit0@bandit:~$ exit
bandit0@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
agrit@MahaShyam:~$ ssh bandit1@bandit.labs.overthewire.org -p 2220
```

1	1	—	—	—	—	()	1
1	1	\	/	1	\	/	1
1	1	)	(	1	1	(	1
1	.	/	\	,	1	\	1

This is an OverTheWire game server.
More information on <http://www.overthewire.org/wargames>

```
bandit1@bandit.labs.overthewire.org's password:
Permission denied, please try again.
bandit1@bandit.labs.overthewire.org's password:
```

For support, questions or comments, contact us on discord or IRC.

Enjoy your stay!

```
bandit1@bandit:~$ ls -lps
total 24
4 -rw-r----- 1 bandit2 bandit1 33 Sep 19 07:08 -
4 drwxr-xr-x 2 root root 4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root 4096 Sep 19 07:09 ../
4 -rw-r--r-- 1 root root 220 Mar 31 2024 .bash_logout
4 -rw-r--r-- 1 root root 3771 Mar 31 2024 .bashrc
4 -rw-r--r-- 1 root root 807 Mar 31 2024 .profile
bandit1@bandit:~$ cat ./-
263JGJPfgU6LtdEvgfWU1XP5yac29mFx
bandit1@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
```

Level-2 Password: 263JGJPfgU6LtdEvgfWU1XP5yac29mFx

Level 2 → Level 3

Objective: Retrieve the password from a file with spaces in its name.

Commands Used:

- `ls`
 - **Purpose:** Display files in the directory.
- `cat 'spaces\ in this\ filename'`

- ### Exit Level 2: Use the `exit` command.

```
Enjoy your stay!
```

```
bandit2@bandit:~$ cat spaces\ in\ this\ filename
MNk8KNH3Usiio41PRUEoDFPqfxLPLSmx
bandit2@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
agrit@MahaShyam:~$
```

Exit Level 3: Use the `exit` command.

```
bandit2@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
agrit@MahaShyam:~$ ^C
agrit@MahaShyam:~$ ssh bandit3@bandit.labs.overthewire.org -p 2220
```



This is an OverTheWire game server.
More information on <http://www.overthewire.org/wargames>

```
bandit3@bandit.labs.overthewire.org's password:
Permission denied, please try again.
bandit3@bandit.labs.overthewire.org's password:
```

```
For support, questions or comments, contact us on discord or IRC.
```

Enjoy your stay!

```
bandit3@bandit:~$ ls -alps
total 24
4 drwxr-xr-x  3 root root 4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root 4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root root  220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root root 3771 Mar 31  2024 .bashrc
4 drwxr-xr-x  2 root root 4096 Sep 19 07:08 inhere/
4 -rw-r--r--  1 root root  807 Mar 31  2024 .profile
bandit3@bandit:~$ cat inhere/...Hiding-From-You
2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ
bandit3@bandit:~$
```

```
For support, questions or comments, contact us on discord or IRC.
```

Enjoy your stay!

```
bandit3@bandit:~$ ls -alps
total 24
4 drwxr-xr-x  3 root root 4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root 4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root root  220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root root 3771 Mar 31  2024 .bashrc
4 drwxr-xr-x  2 root root 4096 Sep 19 07:08 inhere/
4 -rw-r--r--  1 root root  807 Mar 31  2024 .profile
bandit3@bandit:~$ cat inhere/...Hiding-From-You
2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ
bandit3@bandit:~$
```

```
For support, questions or comments, contact us on discord or IRC.
```

Enjoy your stay!

```
bandit3@bandit:~$ ls -alps
total 24
4 drwxr-xr-x  3 root root 4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root 4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root root  220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root root 3771 Mar 31  2024 .bashrc
4 drwxr-xr-x  2 root root 4096 Sep 19 07:08 inhere/
4 -rw-r--r--  1 root root  807 Mar 31  2024 .profile
bandit3@bandit:~$ cat inhere/...Hiding-From-You
2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ
bandit3@bandit:~$
```

Level-4 Password:
2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ

Level-4 Password:
2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ

Level 4 → Level 5

Objective: Retrieve the password stored in a file located in the `inhere` directory.

Commands Used:

Level 4 → Level 5

Objective: Retrieve the password stored in a file located in the `inhere` directory.

Commands Used:

Level 4 → Level 5

Objective: Retrieve the password stored in a file located in the `inhere` directory.


Commands Used:

- `cd inherer`
 - **Purpose:** Change directory to `inherer`.
- `ls`
 - **Purpose:** List the files in the directory.
- `find . -type f`
 - **Purpose:** This searches the current directory (.) and all its subdirectories for files only (-type f).
- `|` (Pipe)
 - **Purpose:** Redirects the output of the `find` command to the input of the next command (xargs file).
- `xargs:`
 - **Purpose:** Takes input from the previous command and executes another command (file) with those inputs as arguments.
- `File`
 - **Purpose:** Analyzes the type of each file and displays detailed information about it (e.g., text file, binary file).
- `cat ./file07`
 - **Purpose:** Read the content of the specified file.

Level-5 Password: 4oQYVPkxZ00E005pTW81FB8j8lxXGUQw.

Exit Level 4: Use the `exit` command.

```
agrit@MahaShyan:~$ ssh bandit4@bandit.labs.overthewire.org -p 2220
```



```

      This is an OverTheWire game server.
      More information on http://www.overthewire.org/wargames

bandit4@bandit.labs.overthewire.org's password:
```



Enjoy your stay!

```
bandit4@bandit:~$ ls -alps
total 24
4 drwxr-xr-x  3 root root 4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root 4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root root  220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root root 3771 Mar 31  2024 .bashrc
4 drwxr-xr-x  2 root root 4096 Sep 19 07:08 inhere/
4 -rw-r--r--  1 root root  807 Mar 31  2024 .profile
bandit4@bandit:~$ cat inhere/-file0
cat: inhere/-file0: No such file or directory
bandit4@bandit:~$ cd inhere/
```

```
bandit4@bandit:~$ cd inhere/
bandit4@bandit:~/inhere$ ls -al
total 48
drwxr-xr-x 2 root  root  4096 Sep 19 07:08 .
drwxr-xr-x 3 root  root  4096 Sep 19 07:08 ..
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file00
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file01
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file02
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file03
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file04
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file05
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file06
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file07
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file08
-rw-r----- 1 bandit5 bandit4  33 Sep 19 07:08 -file09
bandit4@bandit:~/inhere$ find . -type f | xargs file
./-file08: data
./-file02: data
./-file09: data
./-file01: data
./-file00: data
./-file05: data
./-file07: ASCII text
./-file03: data
./-file06: data
./-file04: data
bandit4@bandit:~/inhere$ man xargs
bandit4@bandit:~/inhere$ cat ./file07
cat: ./file07: No such file or directory
bandit4@bandit:~/inhere$ cat ./-file07
4oQYVPkxZOOEOO5pTW81FB8j8lxXGUQw
bandit4@bandit:~/inhere$ exit
logout
Connection to bandit.labs.overthewire.org closed.
agrit@MahaShyam:~$
```

Level-5 Password:

4oQYVPkxZOOEOO5pTW81FB8j8lxXGUQw

Level 5 → Level 6

Objective: Retrieve the password stored in a file with specific properties (size 1033 bytes, non-readable by others).

Commands Used:

- `ls -alps`

For support, questions or comments, contact us on discord or IRC.

Enjoy your stay!

```
bandit5@bandit:~$ ls -alps
total 24
4 drwxr-xr-x  3 root root    4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root    4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root root     220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root root    3771 Mar 31  2024 .bashrc
4 drwxr-x--- 22 root bandit5 4096 Sep 19 07:08 inhere/
4 -rw-r--r--  1 root root     807 Mar 31  2024 .profile
bandit5@bandit:~$ cd inhere/
bandit5@bandit:~/inhere$ ls -al
total 88
drwxr-x--- 22 root bandit5 4096 Sep 19 07:08 .
drwxr-xr-x  3 root root    4096 Sep 19 07:08 ..
drwxr-x---  2 root bandit5 4096 Sep 19 07:08 maybehere00
```

```
find: paths must precede expression: `grep'
bandit5@bandit:~/inhere$ find . -type f -size +0c -exec file {} \; | grep "ASCII text"
./maybehere02/.file1: ASCII text, with very long lines (6350)
./maybehere02/-file1: ASCII text, with very long lines (3800)
./maybehere02/spaces file1: ASCII text, with very long lines (6745)
./maybehere02/.file2: ASCII text, with very long lines (2576)
./maybehere02/spaces file2: ASCII text, with very long lines (8487)
./maybehere19/.file1: ASCII text, with very long lines (7208)
./maybehere19/-file1: ASCII text, with very long lines (6301)
./maybehere19/spaces file1: ASCII text, with very long lines (7185)
./maybehere19/-file2: ASCII text, with very long lines (5593)
./maybehere19/.file2: ASCII text, with very long lines (4739)
./maybehere19/spaces file2: ASCII text, with very long lines (8784)
./maybehere00/.file1: ASCII text, with very long lines (8160)
```

```
bandit5@bandit:~/inhere$ find . -type f -size +1033c -executable;
./maybehere02/.file1
./maybehere02/-file1
./maybehere02/spaces file1
./maybehere02/-file3
./maybehere02/spaces file3
./maybehere02/.file3
./maybehere19/.file1
./maybehere19/-file1
```

```
./maybehere16/spaces: cannot open './maybehere16/spaces' (No such file or directory)
file2: cannot open 'file2' (No such file or directory)
./maybehere16/.file3: DOS executable (COM), start instruction 0x8cfa2314 44ee920f
bandit5@bandit:~/inhere$ man xargs
bandit5@bandit:~/inhere$ find . -type f -size 1033 -exec file {} \; | grep "ASCII
bandit5@bandit:~/inhere$ find . -type f -size 1033c ! -executable
./maybehere07/.file2
bandit5@bandit:~/inhere$ cat ./maybehere07/.file2
HWasnPhtq9AVKe0dmk45nxy20cvUa6EG
```

Level-6 Password: HWasnPhtq9AVKe0dmk45nxy20cvUa6EG

Here is the documentation rewritten in the requested format:

Steps to Solve Levels 0–10

Level 0 → Level 1

Objective: Log in to the Bandit server and find the password for the next level.

Commands Used:

- `ssh bandit0@bandit.labs.overthewire.org -p 2220`
 - **Purpose:** Securely log into the Bandit server using SSH with the username `bandit0` on port 2220.

Password: `bandit0` (provided by the game).

Key Learning: Securely connecting to remote servers using SSH.

Get Level-1 Password: Use the command `cat readme`.

Level-1 Password: `ZjLjTmM6FvvyRnrb2rfNW0Z0Ta6ip5If`.

Exit Level 0: Use the `exit` command.

Level 1 → Level 2

Objective: Retrieve the password from a file named `readme`.

Commands Used:

- `ls`
 - **Purpose:** List the files in the current directory.
- `cat readme`
 - **Purpose:** Display the contents of the file to retrieve the password.

Level-2 Password: `263JGJPfgU6LtdEvqfWU1XP5yac29mFx`.

Exit Level 1: Use the `exit` command.

Level 2 → Level 3

Objective: Retrieve the password from a file with spaces in its name.

Commands Used:

- `ls`
 - **Purpose:** Display files in the directory.
- `cat 'spaces in this filename'`
 - **Purpose:** Use quotes to handle spaces in filenames.

Level-3 Password: Mnk8KNH3Usiio41PRUEoDFPqfxLP1Smx.

Exit Level 2: Use the `exit` command.

Level 3 → Level 4

Objective: Find the password in a hidden file named `.hidden`.

Commands Used:

- `ls -a`
 - **Purpose:** List all files, including hidden ones.
- `cat .hidden`
 - **Purpose:** Display the content of the hidden file.

Level-4 Password: 2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ.

Exit Level 3: Use the `exit` command.

Level 4 → Level 5

Objective: Retrieve the password stored in a file located in the `inhere` directory.

Commands Used:

- `cd inhere`
 - **Purpose:** Change directory to `inhere`.
- `ls`
 - **Purpose:** List the files in the directory.
- `cat <filename>`
 - **Purpose:** Read the content of the specified file.

Level-5 Password: 4oQYVPkxZ00E005pTW81FB8j8lxXGUQw.

Exit Level 4: Use the `exit` command.

Level 5 → Level 6

Objective: Retrieve the password stored in a file with specific properties (size 1033 bytes, non-readable by others).

Commands Used:

- `ls -l`

- **Purpose:** Display detailed file information.
- `cat <filename>`
 - **Purpose:** Display the content of the file.

Level-6 Password: HWasnPhtq9AVKe0dmk45nxy20cvUa6EG.

Exit Level 5: Use the `exit` command.

Level 6 → Level 7

Objective: Find the password stored in a file with specific characteristics in a directory containing many files.

Commands Used:

- `find . -size 33c`
 - **Purpose:** Locate files with size 33 bytes in the current directory.
- `cat <filename>`
 - **Purpose:** Read the content of the located file.

Level-7 Password: morbNTDkSW6jIlUc0ym0dMaLn0lFVAaj.

Exit Level 6: Use the `exit` command.

```
bandit5@bandit:~/inhere$ exit
logout
Connection to bandit.labs.overthewire.org closed.
agrit@MahaShyam:~$ ssh bandit6@bandit.labs.overthewire.org -p 2220

      _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_ _|_
      |'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\ /'_\
      |_) | (| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
      |._/ \_,_| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
                                     .-.-.-.

                This is an OverTheWire game server.
                More information on http://www.overthewire.org/wargames

bandit6@bandit.labs.overthewire.org's password:
```

Enjoy your stay.

```
bandit6@bandit:~$ la - alps
ls: cannot access '-': No such file or directory
ls: cannot access 'alps': No such file or directory
bandit6@bandit:~$ la -alps
total 20
4 drwxr-xr-x  2 root root 4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root 4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root root  220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root root 3771 Mar 31  2024 .bashrc
4 -rw-r--r--  1 root root  807 Mar 31  2024 .profile
bandit6@bandit:~$ ls -alps
total 20
4 drwxr-xr-x  2 root root 4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root root 4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root root  220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root root 3771 Mar 31  2024 .bashrc
```

```
bandit6@bandit:~$ find . -type f size 33c;
find: paths must precede expression: `size'
bandit6@bandit:~$ find . -type f -size 33c;
bandit6@bandit:~$ find . -type f -size 33c -exec file {} \;
bandit6@bandit:~$ find / -type f -user bandit7 -group bandit6 -size 33c;
find: '/drifter/drifter14_src/axTLS': Permission denied
find: '/root': Permission denied
find: '/snap': Permission denied
find: '/tmp': Permission denied
find: '/proc/tty/driver': Permission denied
find: '/proc/3721967/task/3721967/fdinfo/6': No such file or directory
find: '/proc/3721967/fdinfo/5': No such file or directory
find: '/home/bandit31-git': Permission denied
find: '/home/ubuntu': Permission denied
find: '/home/bandit5/inhere': Permission denied
find: '/home/bandit30-git': Permission denied
find: '/home/drifter8/chroot': Permission denied
find: '/home/drifter6/data': Permission denied
```

```
find: '/var/cache/apparmor/00000010': Permission denied
find: '/var/lib/polkit-1': Permission denied
find: '/var/lib/amazon': Permission denied
/var/lib/dpkg/info/bandit7.password
find: '/var/lib/apt/lists/partial': Permission denied
find: '/var/lib/chrony': Permission denied
find: '/var/lib/ispaid/void': Permission denied
```

```
bandit6@bandit:~$ ^C
bandit6@bandit:~$ cat /var/lib/dpkg/info/bandit7.password
morbNTDkSW6jIlUc0ymOdMaLnOlFVAaj
bandit6@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
agrit@MahaShyam:~$
```

Level-7 Password:

morbNTDkSW6jIlUc0ymOdMaLnOlFVAaj

Level 7 → Level 8

Objective: Retrieve the password stored in a file with the ASCII text format.

Commands Used:

- `find . -type f -exec file {} \; | grep ASCII`
 - **Purpose:** Identify files with ASCII content.
- `cat <filename>`
 - **Purpose:** Display the content of the identified file.

Level-8 Password: dfwvzFQi4mU0wfNbFOe9RoWskMLg7eEc.

Exit Level 7: Use the `exit` command.

```
Mondays 1EzFxcQ7IC1VdsvqGs5fX4kWR22GwVnF
unsuccessfully 1aVW4qvBdy39Wkkl5vyAZZV89qVknSuW
Odessa cMnmUf3hUk3zKizQQ9MygtjE0KBauwwN
jacket sS3sDdschJbJfSN1d36VJLppXoYE3mW5
seeping hhrdfoZgoMQmINOrmmZLL5t8sVhDGDWZ
renounces H5pjlsprVRLldbiSKtxAIG6NSBCKmzq2
impoverishment hwiJiqvxQqbMMdW7Va80qMEZmcXXZL8i
bandit7@bandit:~$ cat data.txt | grep "milliont"
millionth dfwvzFQi4mU0wfNbFOe9RoWskMLg7eEc
bandit7@bandit:~$
```

Level-8 Password:

dfwvzFQi4mU0wfNbFOe9RoWskMLg7eEc

Level 8 → Level 9

Objective: Retrieve the password stored in a file, where the filename matches specific properties.

Commands Used:

- `find . -name <filename>`
 - **Purpose:** Locate the file with the exact name.
- `cat <filename>`
 - **Purpose:** Display the content of the identified file.

Level-9 Password: 4CKMh1JI91bUIZZPXDqGana14xvAg0JM.

Exit Level 8: Use the `exit` command.

```
connection to bandit.labs.overthewire.org closed.  
agrit@MahaShyam:~$ ssh bandit8@bandit.labs.overthewire.org -p 2220  
  
      _-|_|_ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _  
      |'_|\ / _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _  
      | |_ ) | ( _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _  
      |_. _ / \ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _  
  
      This is an OverTheWire game server.  
      More information on http://www.overthewire.org/wargames  
  
bandit8@bandit.labs.overthewire.org's password:
```

```
bandit8@bandit:~$ ls -alps
total 56
 4 drwxr-xr-x  2 root    root      4096 Sep 19 07:08 ./
 4 drwxr-xr-x 70 root    root      4096 Sep 19 07:09 ../
 4 -rw-r--r--  1 root    root        220 Mar 31  2024 .bash_logout
 4 -rw-r--r--  1 root    root      3771 Mar 31  2024 .bashrc
36 -rw-r-----  1 bandit9 bandit8 33033 Sep 19 07:08 data.txt
 4 -rw-r--r--  1 root    root        807 Mar 31  2024 .profile
bandit8@bandit:~$ tr -s '[:space:]' '\n' < data.txt | sort | uniq -c | awk '$1 == 1 {print $2}'
4CKMh1JI91bUIZZPXQDqGana14xvAg0JM
bandit8@bandit:~$
```

Level-9 Password:

4CKMh1JI91bUIZZPXDqGanal4xvAg0JM

Level 9 → Level 10

Objective: Retrieve the password stored in a file with encoded data.

Commands Used:

- `strings <filename>`
 - **Purpose:** Extract and display readable strings from the binary file.

Level-10 Password: FGUW5iLLVJrxX9kMYMmlN4MgbpfMiqey.

Exit Level 9: Use the `exit` command.

```
agrit@MahaShyam:~$ ssh bandit9@bandit.labs.overthewire.org -p 2220
[ _ _ _ _ _ _ _ _ _ _ ] ( _ ) [ _ _ _ _ _ ]
| _ _ \ / _ _ \ / _ _ \ / _ _ \ / _ _ \
| | ) | ( | | | | ( | | | | |
| _ _ \ / _ _ \ / _ _ \ / _ _ \ / _ _ \

This is an OverTheWire game server.
More information on http://www.overthewire.org/wargames

bandit9@bandit.labs.overthewire.org's password:
```

```
bandit9@bandit:~$ ls -alps
total 40
4 drwxr-xr-x  2 root    root      4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root    root      4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root    root        220 Mar 31 2024 .bash_logout
4 -rw-r--r--  1 root    root      3771 Mar 31 2024 .bashrc
20 -rw-r----- 1 bandit10 bandit9 19379 Sep 19 07:08 data.txt
4 -rw-r--r--  1 root    root        807 Mar 31 2024 .profile
bandit9@bandit:~$ grep -o "=.*" data.txt
grep: data.txt: binary file matches
bandit9@bandit:~$ grep -o '= *[A-Za-z0-9 ,.\-]*' data.txt
grep: data.txt: binary file matches
bandit9@bandit:~$ strings data.txt | grep -o '= *[A-Za-z0-9 ,.\-]*'
=
=
=
=
=
=
=
=
= the
```

```
=
= FGUW5iLLVJrxX9kMYMm1N4MgbpfMiqey
=
=
bandit9@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
agrit@MahaShyam:~$
```

Level-10 Password:
FGUW5ilLVJrxX9kMYMmlN4MgbpfMiqey

```
Connection to bandit.labs.overthewire.org closed.  
agrit@MahaShyam:~$ ssh bandit10@bandit.labs.overthewire.org -p 2220
```

1	1	—	—	—	—	—	()	1
1	'	\	/	'	'	\	/	1
1	)	1	(	1	1	(	1	1
1	.	/	\	,	1	1	\	,

This is an OverTheWire game server.
More information on <http://www.overthewire.org/wargames>

bandit10@bandit.labs.overthewire.org's password:

[illegible]

Enjoy your stay!

```
bandit10@bandit:~$ ls -alps
total 24
4 drwxr-xr-x  2 root    root    4096 Sep 19 07:08 ./
4 drwxr-xr-x 70 root    root    4096 Sep 19 07:09 ../
4 -rw-r--r--  1 root    root     220 Mar 31  2024 .bash_logout
4 -rw-r--r--  1 root    root    3771 Mar 31  2024 .bashrc
4 -rw-r----- 1 bandit11 bandit10   69 Sep 19 07:08 data.txt
4 -rw-r--r--  1 root    root     807 Mar 31  2024 .profile
bandit10@bandit:~$ grep -o -P '\b[A-Za-z0-9+/]{4,}={0,2}\b' data.txt
VGhlIHBhc3N3b3JkIGlzIGR0UjE3M2ZaS2IwU1JzREZTR3NnMlJXbnB0VmozcVJyCg
bandit10@bandit:~$
```

Level-11 Password:
dtR173fZKb0RRsDFSGsg2RWnpNVj3qRr

Level-12 Password: 7x16WNeHli5YkIhWsfFIqoognUTyj9Q4

```
Dec 25 15:03
bandit12@bandit: /tmp/shyam
00000100: 2509 612c 5364 8e7d 2402 808e 90b0 02d4  %.a,Sd.j>.... ..
000001f0: 13c7 be0a 1ae3 1400 4796 4370 efc0 9b43  ....G.Cp...C
00000200: a4cb 882a 4aae 4b81 abf7 1c14 67f7 8a34  ...*J.K....g..4
00000210: 0867 e5b6 1df6 b0e8 8023 6d1c 416a 28d0  .g.....#m.Aj(
00000220: c460 1604 bba3 2e52 297d 8788 4e30 e1f9  .^....R)}}..N0..
00000230: 2646 8f5d 3062 2628 c94e 904b 6754 3891  &F.]0b&(.N.KgT8.
00000240: 421f 4a9f 9feb 2ec9 83e2 c20f fc5d c914  B.J.....]..
00000250: e142 432a 0ecb 0459 1b15 923e 0200 00    .BC*...Y....>...
bandit12@bandit:~$ man xxd
bandit12@bandit:~$ mkdir /tmp/shyam
bandit12@bandit:~$ cp data.txt /tmp/shyam
bandit12@bandit:~$ cd /tmp/shyam
bandit12@bandit:/tmp/shyam$ ls
data.txt
bandit12@bandit:/tmp/shyam$ xxd r data.txt > data
xxd: r: No such file or directory
bandit12@bandit:/tmp/shyam$ xxd -r data.txt > data
bandit12@bandit:/tmp/shyam$ ls
data  data.txt
bandit12@bandit:/tmp/shyam$ file data
data: gzip compressed data, was "data2.bin", last modified: Thu Sep 19 07:08:15 2024, max compression, from Unix, original size modulo 2^32 574
bandit12@bandit:/tmp/shyam$ man gzip
bandit12@bandit:/tmp/shyam$ mv data file.gz
bandit12@bandit:/tmp/shyam$ gzip -d file.gz
bandit12@bandit:/tmp/shyam$ ls
data.txt  file
bandit12@bandit:/tmp/shyam$ file file
file: bzip2 compressed data, block size = 900k
```

```
Dec 25 15:03
bandit12@bandit: /tmp/shyam
file: bzip2 compressed data, block size = 900k
bandit12@bandit:/tmp/shyam$ mv file file.bz2
bandit12@bandit:/tmp/shyam$ man bzip2
bandit12@bandit:/tmp/shyam$ bzip2 -d file.bz2
bandit12@bandit:/tmp/shyam$ ls
data.txt  file
bandit12@bandit:/tmp/shyam$ file file
file: gzip compressed data, was "data4.bin", last modified: Thu Sep 19 07:08:15 2024, max compression, from Unix, original size modulo 2^32 20480
bandit12@bandit:/tmp/shyam$ mv file file.gz
bandit12@bandit:/tmp/shyam$ gzip -d file.gz
bandit12@bandit:/tmp/shyam$ file file
file: POSIX tar archive (GNU)
bandit12@bandit:/tmp/shyam$ mv file file.tar
bandit12@bandit:/tmp/shyam$ tar xf file.tar
bandit12@bandit:/tmp/shyam$ ls
data5.bin  data.txt  file.tar
bandit12@bandit:/tmp/shyam$ file data5.bin
data5.bin: POSIX tar archive (GNU)
bandit12@bandit:/tmp/shyam$ mv data5.bin file.tar
bandit12@bandit:/tmp/shyam$ tar xf file.tar
bandit12@bandit:/tmp/shyam$ ls
data6.bin  data.txt  file.tar
bandit12@bandit:/tmp/shyam$ file data6.bin
data6.bin: bzip2 compressed data, block size = 900k
bandit12@bandit:/tmp/shyam$ mv data6.bin file.bz2
bandit12@bandit:/tmp/shyam$ bzip2 -d file.bz2
bandit12@bandit:/tmp/shyam$ ls
data.txt  file  file.tar
Ubuntu Software
```

Level-13 Password: FO5dwFsc0cbaIiH0h8J2eUks2vdTDwAn

```
cat: /etc/bandit_pass/bandit14: Permission denied
bandit13@bandit:~$ ssh -v -i sshkey.private -p 2220 -o UserKnownHostsFile=/dev/null -o StrictHostKeyChecking=no bandit14@localhost
OpenSSH_9.6p1 Ubuntu-3ubuntu13.5, OpenSSL 3.0.13 30 Jan 2024
```

```
bandit14@bandit:~$ cat /etc/bandit_pass/bandit14
MU4VWeTyJk8ROof1qqmcBPALh7lDCPvS
bandit14@bandit:~$
```

```
bandit14@bandit:~$
bandit14@bandit:~$ cat /etc/bandit_pass/bandit14
MU4VWeTyJk8ROof1qqmcBPALh7lDCPvS
bandit14@bandit:~$ nc localhost 30000
MU4VWeTyJk8ROof1qqmcBPALh7lDCPvS
Correct!
8xCjnmgoKbGLhHFAZlGE5Tmu4M2tKJQo
```

Level-14 Password:

MU4VWeTyJk8ROof1qqmcBPALh7lDCPvS

Level-15 Password:

8xCjnmgoKbGLhHFAZlGE5Tmu4M2tKJQo

```
--ssl-alpn ALPN list (Specify ALPN protocol list)
http://www.openssl.org
bandit15@bandit:~$ ncat --ssl localhost 30001
8xCjnmgoKbGLhHFAZlGE5Tmu4M2tKJQo
Correct!
kSkvUpMQ7lBYyCM4GBPvCvT1BfWRy0Dx
```

Level-16 Password:

kSkvUpMQ7lBYyCM4GBPvCvT1BfWRy0Dx