DEPARTMENT OF CAREER PLANNING & DEVELOPMENT
Discover. Learn. Empower.

NAAC GRADE A+ ACCREDITED UNIVERSITY

nirf RANKED #19 AMONGST TOP UNIVERSITIES IN INDIA

QS UNIVERSITY RANKINGS ASIA
INDIA'S NO. 1 PRIVATE UNIVERSITY

CU
CHANDIGARH UNIVERSITY

ADBMS-Expt 3

Name: Vishesh Kansugia

Class: 24_AIT_KRG_1B

UID: 24BAI70184

Submitted To: Alok Sir

Experiment 03

Easy

(A):

EID	DEPT	SCORES
1	D1	1
2	D1	5.28
3	D1	4
4	D2	8
5	D1	2.5
6	D2	7
7	D3	9
8	D4	10.2

You are given with the Employee schema; the task is to find the highest score for each respective department.

For eg: department D1 have the highest score as 5.28. Hence in the output, final updated score for D1 should be 5.28.
Same with the other departments i.e., D2, D3 and D4.

Employee/postgres@PostgreSQL 18

No limit

Query | Query History

```sql
    DEPT VARCHAR(10),
    SCORES DECIMAL(5,2)
);

INSERT INTO Employee (EID, DEPT, SCORES)
VALUES
(1, 'D1', 1.00),
(2, 'D1', 5.28),
(3, 'D1', 4.00),
(4, 'D2', 8.00),
(5, 'D1', 2.50),
(6, 'D2', 7.00),
(7, 'D3', 9.00),
(8, 'D4', 10.20);

-- 1.
update Employee e
set SCORES=(select max(SCORES) from Employee where DEPT=e.DEPT);

Select * from Employee;

```

Data Output | Messages | Notifications

Showing rows: 1 to 8

	eid [PK] integer	dept character varying (10)	scores numeric (5,2)
1	1	D1	5.28
2	2	D1	5.28
3	3	D1	5.28
4	4	D2	8.00
5	5	D1	5.28
6	6	D2	8.00
7	7	D3	9.00
8	8	D4	10.20

Experiment 03

Medium

(C): SALES ANALYSIS PART 1

A company maintains records of products sold by different salespersons. The management wants to prepare a sales performance report by identifying the salesperson(s) who generated the highest overall sales revenue. If multiple salespersons have the same highest total sales amount, all of them must be included in the final report. Return the seller ID(s) satisfying this condition.

Employee/postgres@PostgreSQL 18

No limit

Query | Query History

```sql
(4,'Pam','Boston',15);

INSERT INTO Company
VALUES
(1,'RED','Boston'),
(2,'ORANGE','New York'),
(3,'YELLOW','Boston'),
(4,'GREEN','Austin');

INSERT INTO Orders
VALUES
(1,'2024-01-10',1,1,1200),
(2,'2024-01-12',2,1,800),
(3,'2024-01-15',3,2,2500),
(4,'2024-01-18',1,3,1500),
(5,'2024-01-22',4,2,700),
(6,'2024-01-25',2,3,2000),
(7,'2024-01-28',3,4,3000),
(8,'2024-01-30',4,4,200);


Select seller_id from
Orders
group by seller_id
having sum(amount) in  (Select max(max_amt) from
(Select seller_id, sum(amount) as max_amt from Orders group by seller_id
) )
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page

	seller_id integer
1	3

Experiment 03

Hard

(B):

A company maintains employee salary records for different departments. The management wants to prepare a report containing employees whose salaries fall among the **top three highest distinct salary values** within their respective departments. If multiple employees receive the same qualifying salary, all such employees must be included in the final report. Display the department name, employee name, and salary for every qualifying employee.

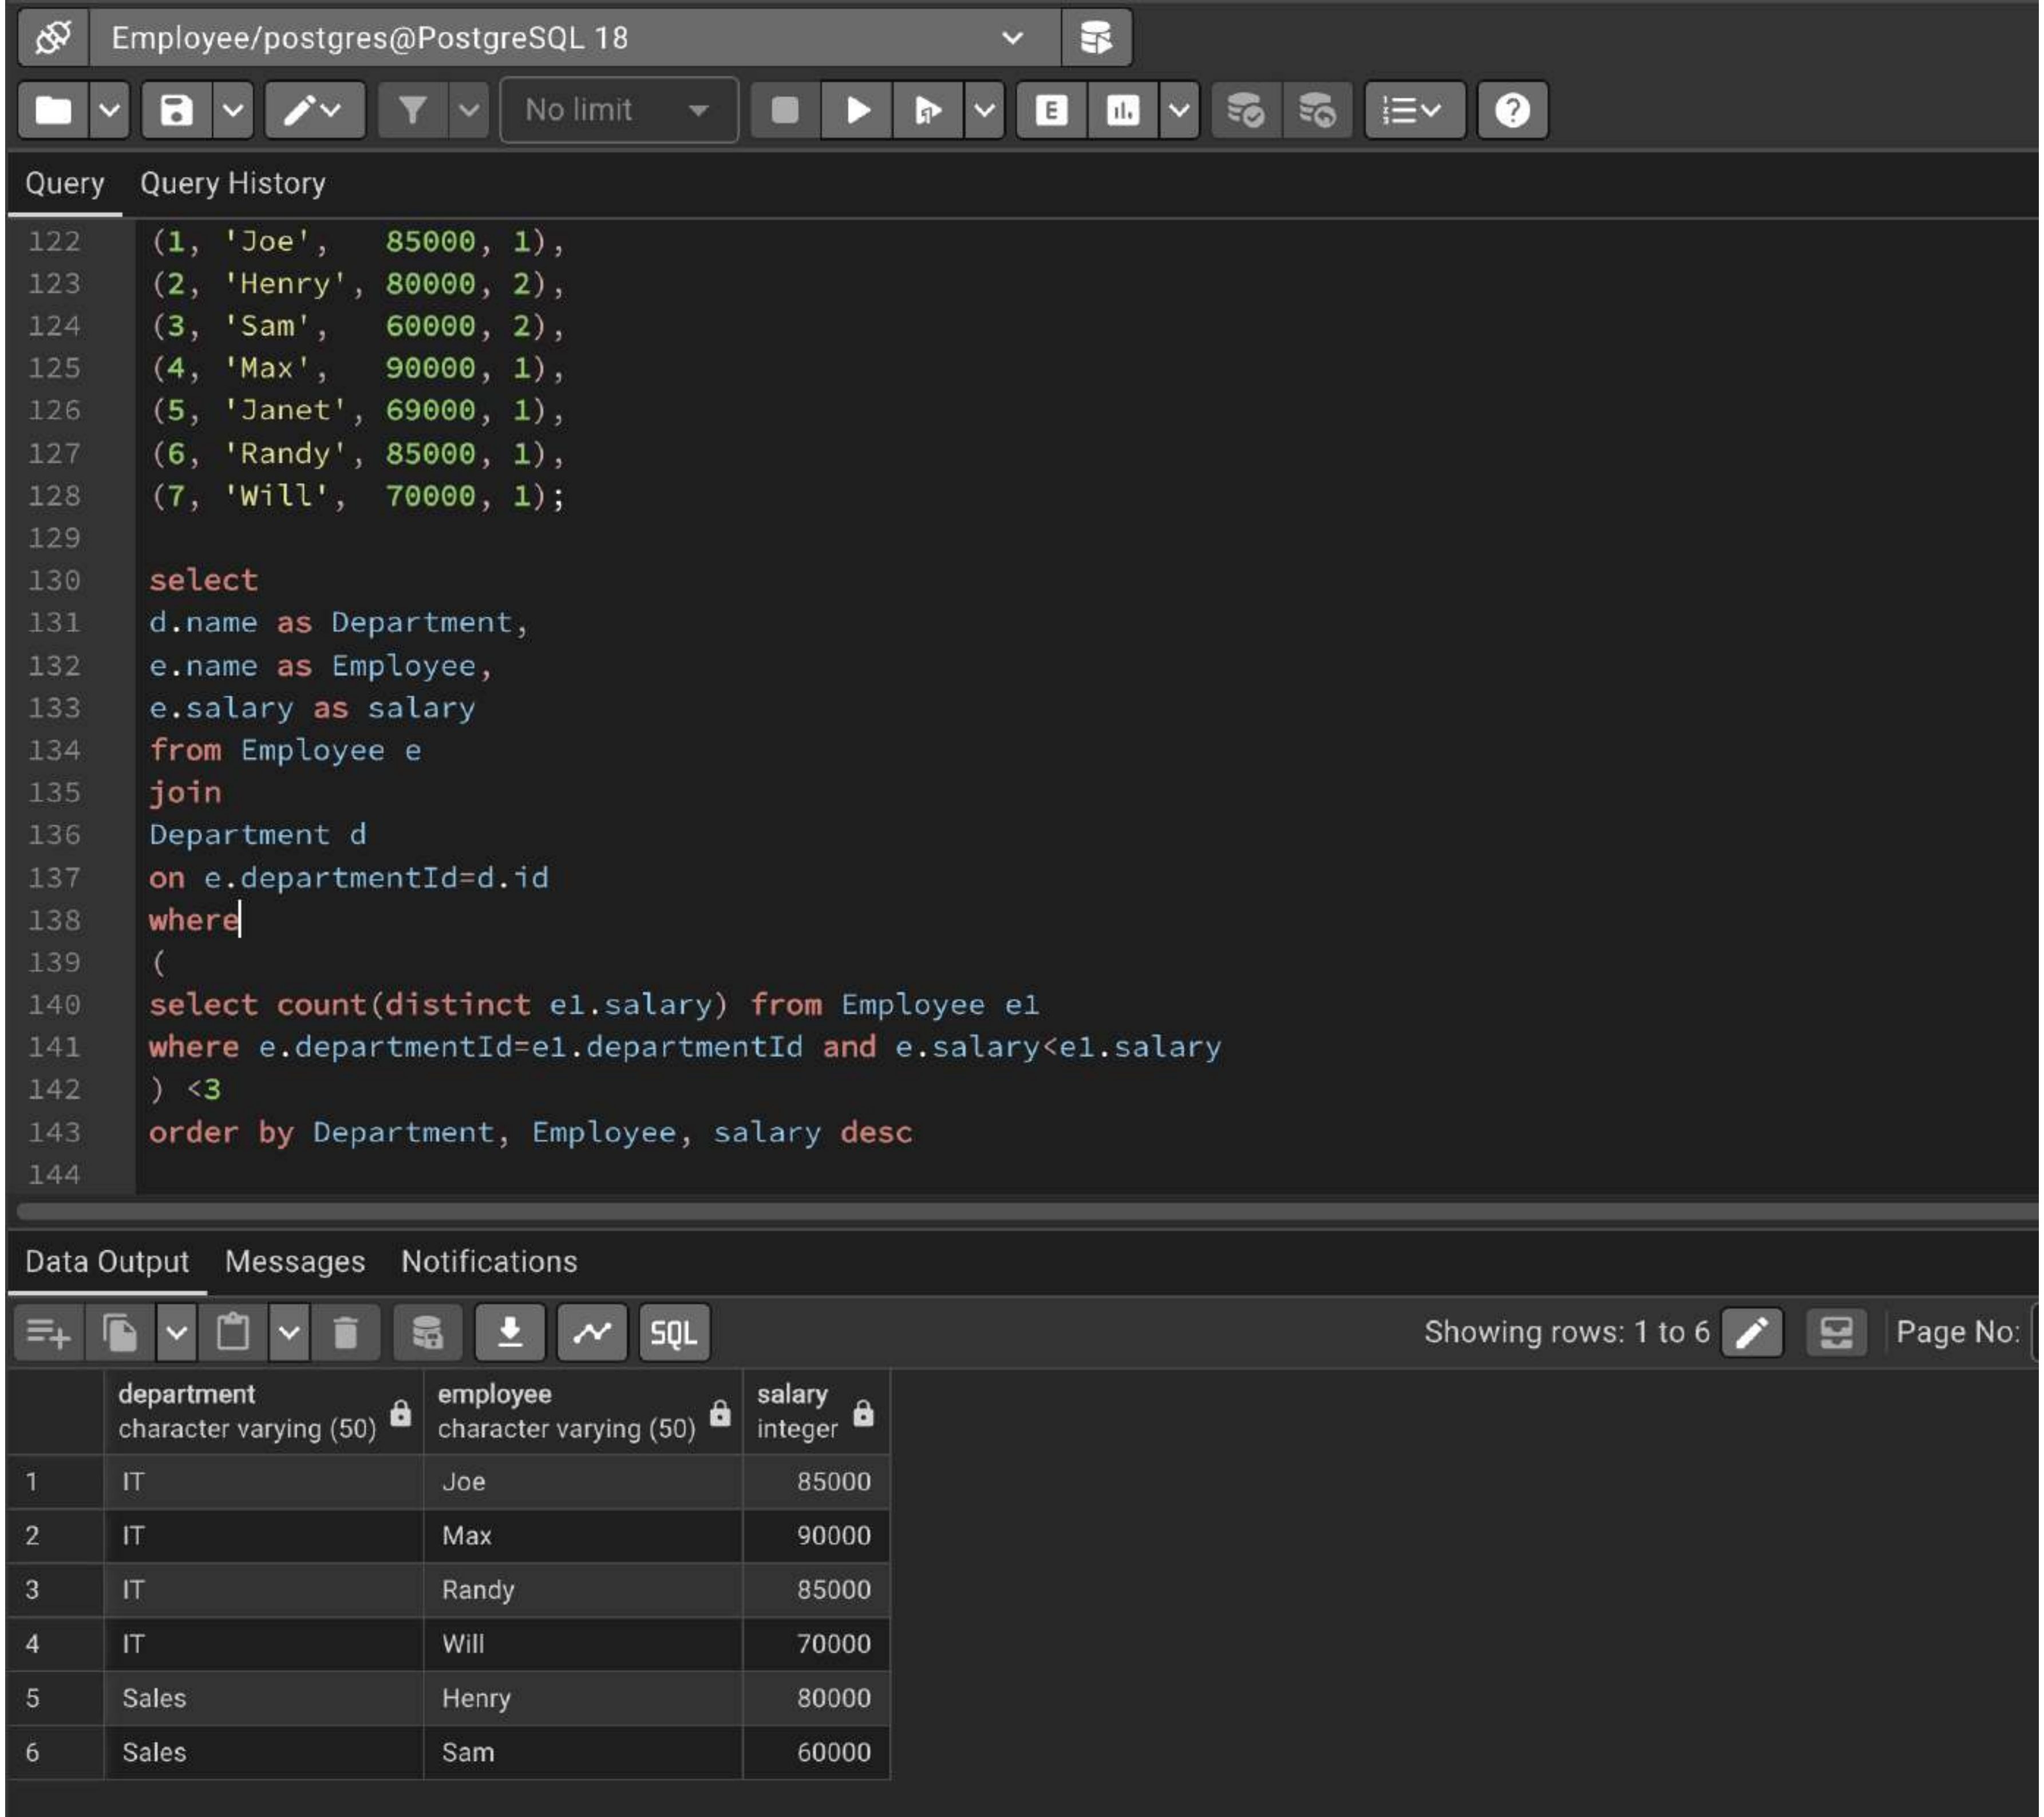
Employee/postgres@PostgreSQL 18
No limit
Query
Query History
(1, 'Joe',   85000, 1),
(2, 'Henry', 80000, 2),
(3, 'Sam',   60000, 2),
(4, 'Max',   90000, 1),
(5, 'Janet', 69000, 1),
(6, 'Randy', 85000, 1),
(7, 'Will', 70000, 1);
select
d.name as Department,
e.name as Employee,
e.salary as salary
from Employee e
join
Department d
on e.departmentId=d.id
where
(
select count(distinct e1.salary) from Employee e1
where e.departmentId=e1.departmentId and e.salary<e1.salary
) <3
order by Department, Employee, salary desc
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 6
Page No:
department character varying (50)
employee character varying (50)
salary integer
1 IT Joe 85000
2 IT Max 90000
3 IT Randy 85000
4 IT Will 70000
5 Sales Henry 80000
6 Sales Sam 60000