


NAME : MD SOYAB EXAM ROLL-11600223063 CLASS ROLL-CSE/23/112


ASG 5 : Create a private bucket in AWS . Upload a file and Check by presigned URL whether you can access the file or not.

Solution:

Step 1: Login to your AWS root account

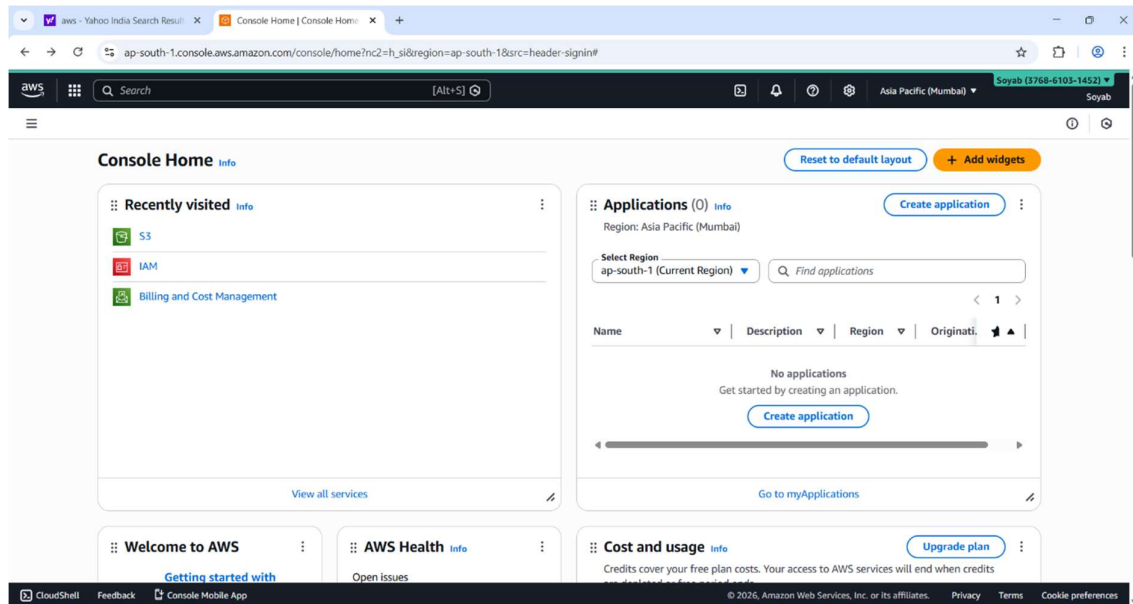

Step 2: Click S3 or search S3 then click on it

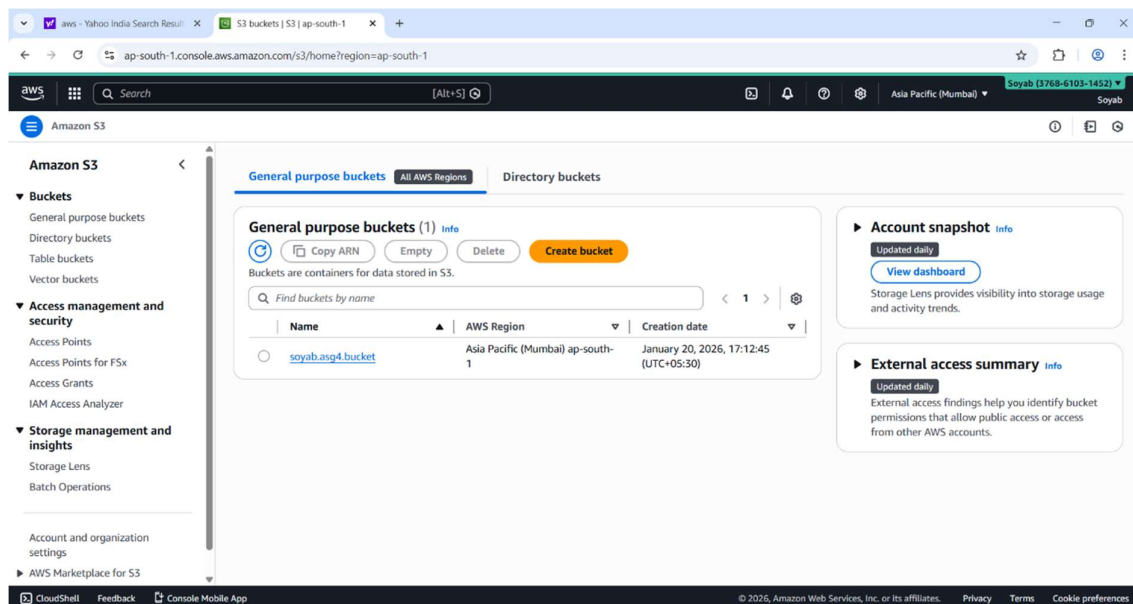

Step 3: Click Create bucket

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)

soyab10-bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Step 4: Type your bucket name with respect to rules mentioned

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☒ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership
Bucket owner enforced

Block Public Access settings for this bucket


Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**


Step 5: DISABLE ACLs

Step 6: Blocking all the public access and acknowledge it.

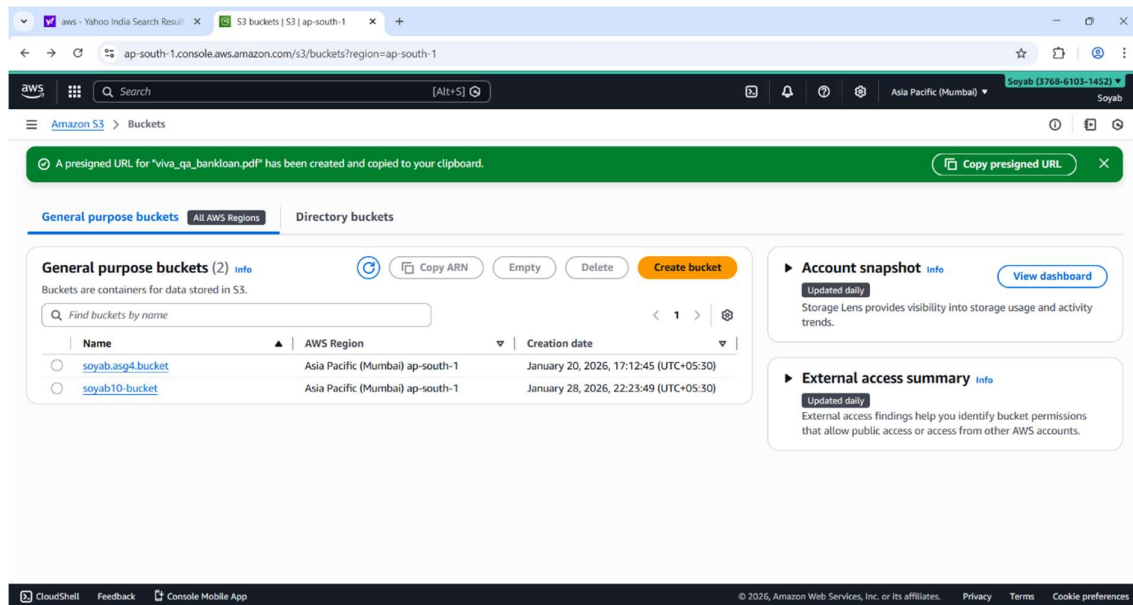


Your bucket is created with necessary permissions successfully!!

Step 7: Click on the bucket created. Click on upload and select your file to be uploaded.

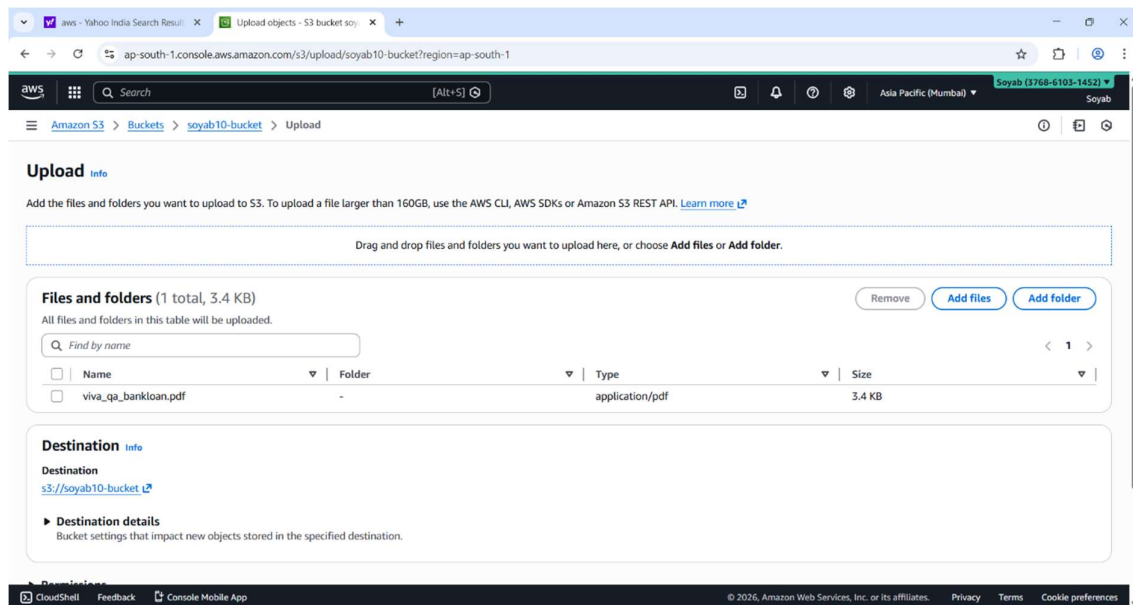


Step 8: Click on Upload to upload the file.

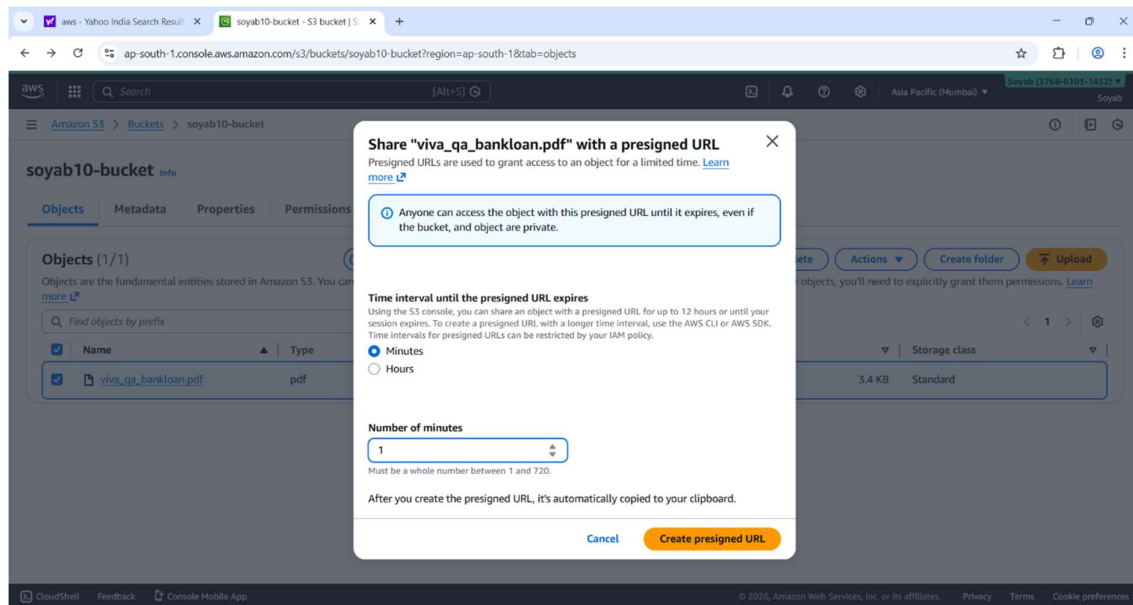


SUCCESSFULLY created

STEP 11 : Copy the presigned URL →open it new window→ it will open for the minutes that we had selected before→after that minutes it will show error again.

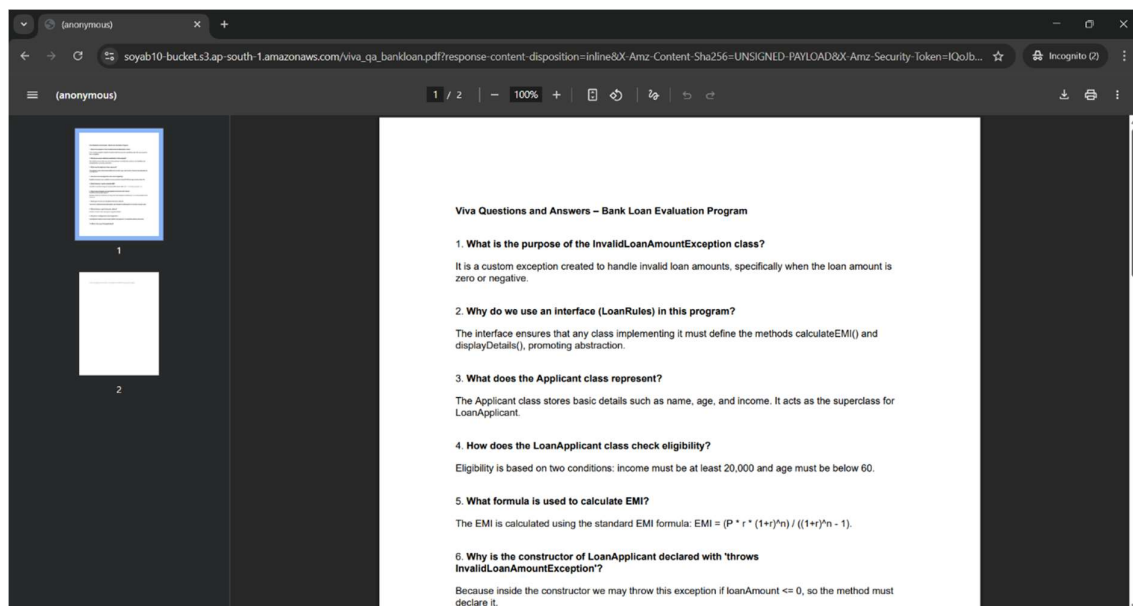

AFTER 1 min it show the error.



```
<?xml version="1.0" encoding="UTF-8" ?>
<Error>
  <Code>AccessDenied</Code>
  <Message>Access Denied</Message>
  <RequestId>EBNMAVGP99XQ93J</RequestId>
  <HostId>qJLx6USEVHFIP2D11v0sboqT551dQ80yb/kcR/Lq0x6jYU0PEu9oUL7IM7++LcYrbm73oC68VqevXzmToeOh+HciIMUMusic</HostId>
</Error>
```