


NAME : MD SOYAB EXAM ROLL-11600223063 CLASS ROLL-CSE/23/112


ASG 6 : How to upload a static website on S3

Solution:

Step 1: Login to your AWS root account

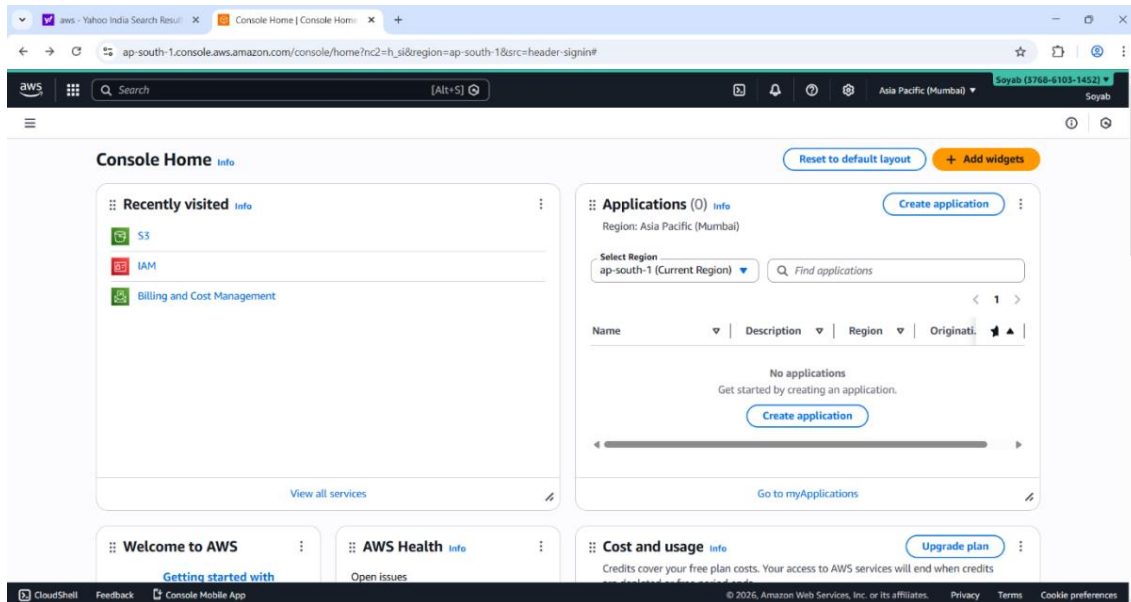

Step 2: Click S3 or search S3 then click on it

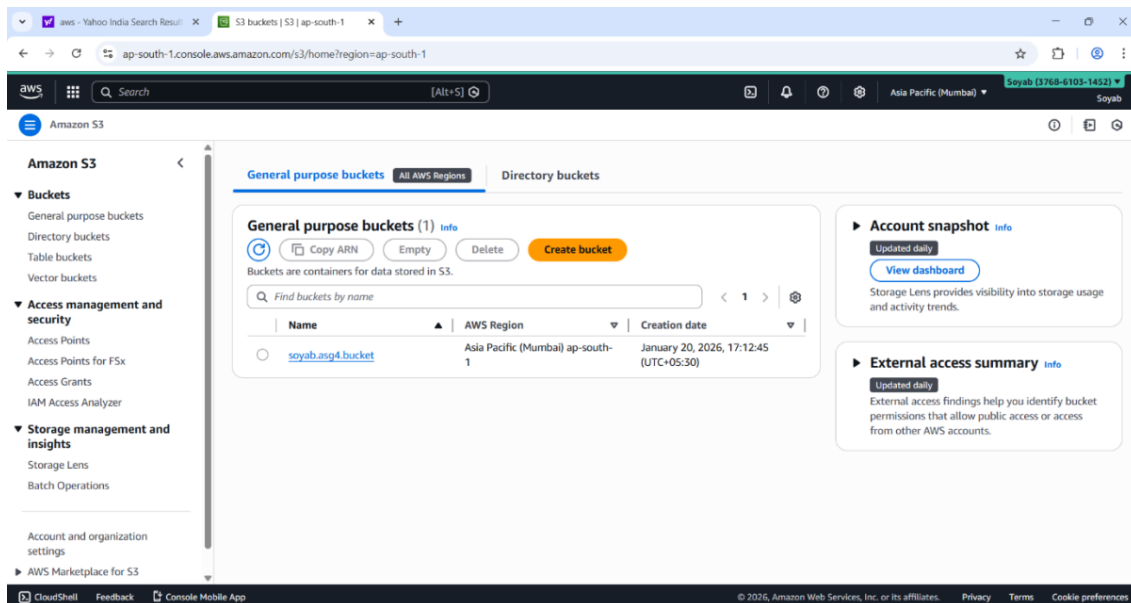

Step 3: Click **Create bucket**

Create bucket Info

Buckets are containers for data stored in S3.

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type Info

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name Info
soyab.asp4.bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 4: Type your bucket name with respect to rules mentioned

Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

⚠️ We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.


☐ **Object writer**
The object writer remains the object owner.

ℹ️ If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)


Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 5: Enable ACLs.

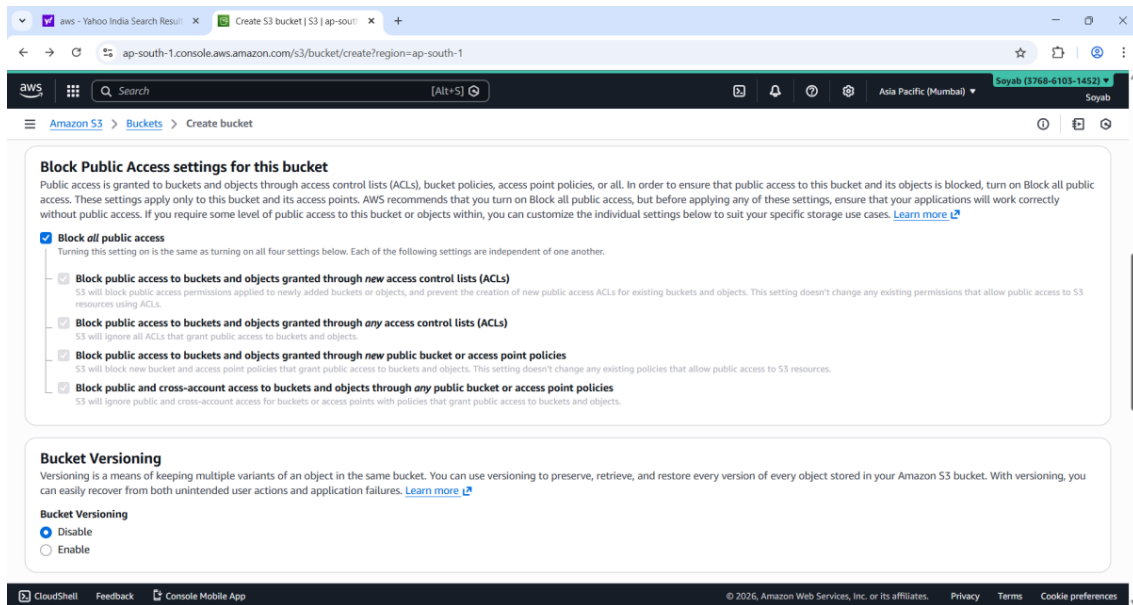


Step 6: Blocking all the public access and acknowledge it.

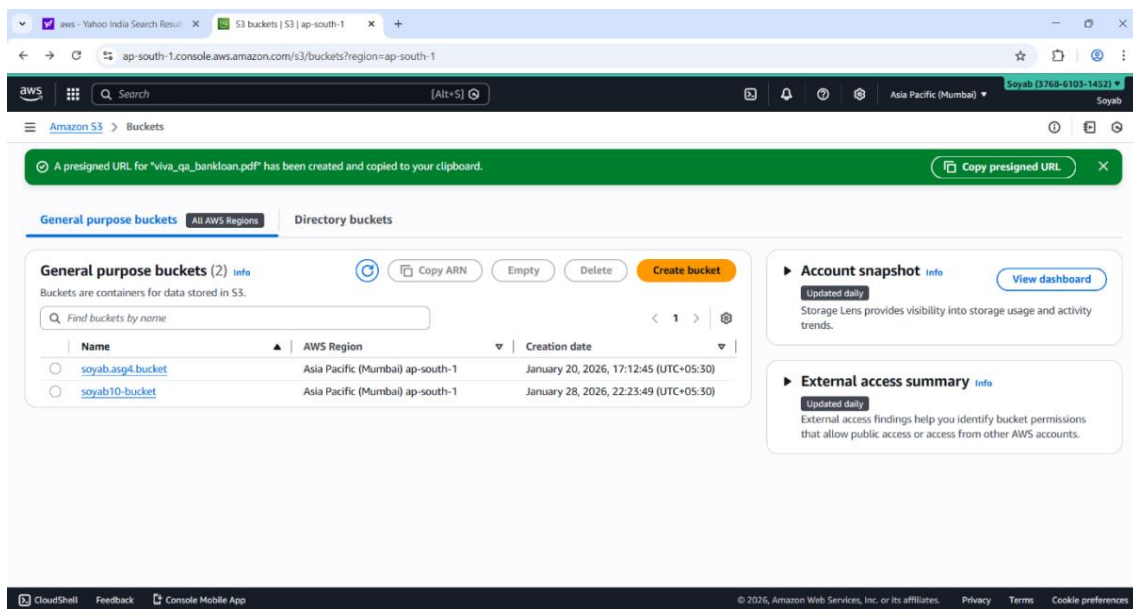


Your bucket is created with necessary permissions successfully!!

Step 7: Click on the bucket created. Click on upload and select your file to be uploaded.

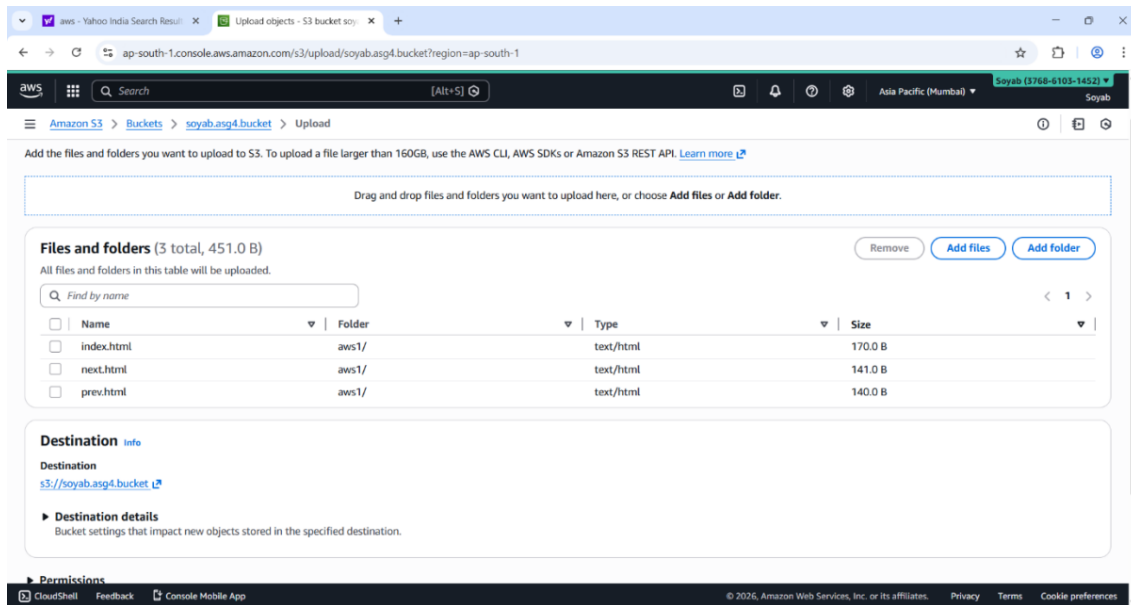


Step 8: Click on Upload to upload the file.

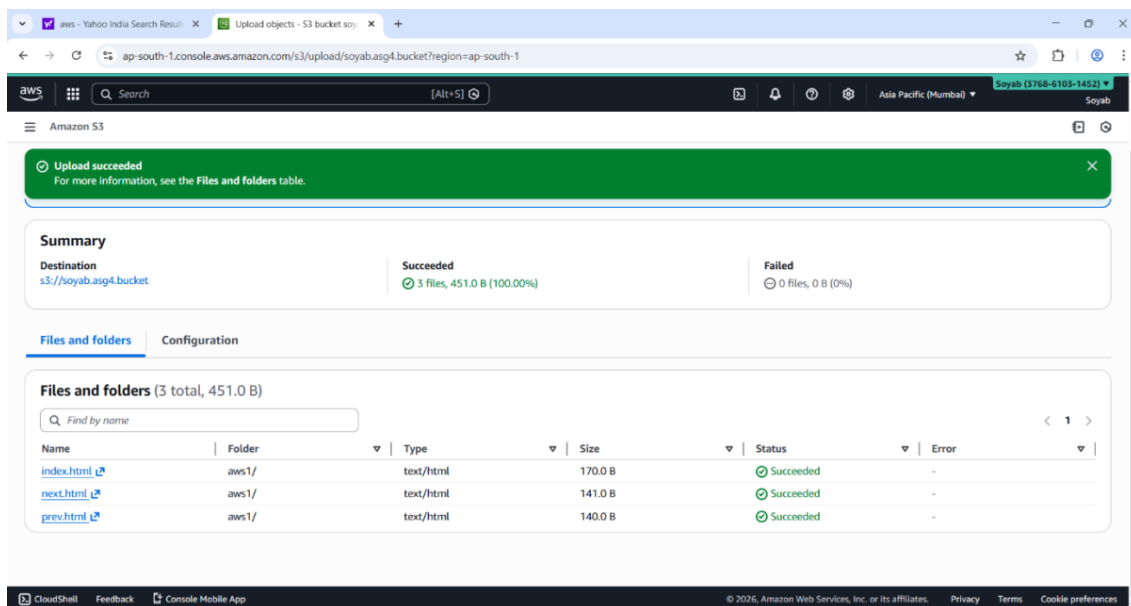

The file is uploaded successfully!!



Step 9: Click on Index Html.

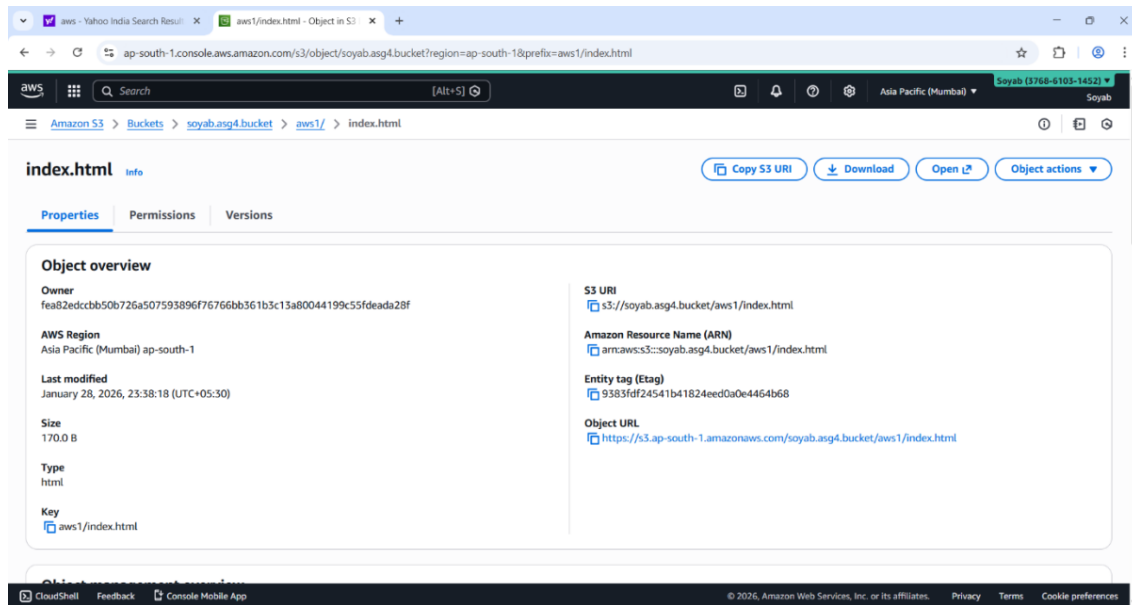

Step 10:Error is Showing.



Step 12 : To fix the error → go to bucket permission → Uncheck Block Public Access → Then enabled ACL → Check Everyone option → check the acknowledgement → Save the changes.

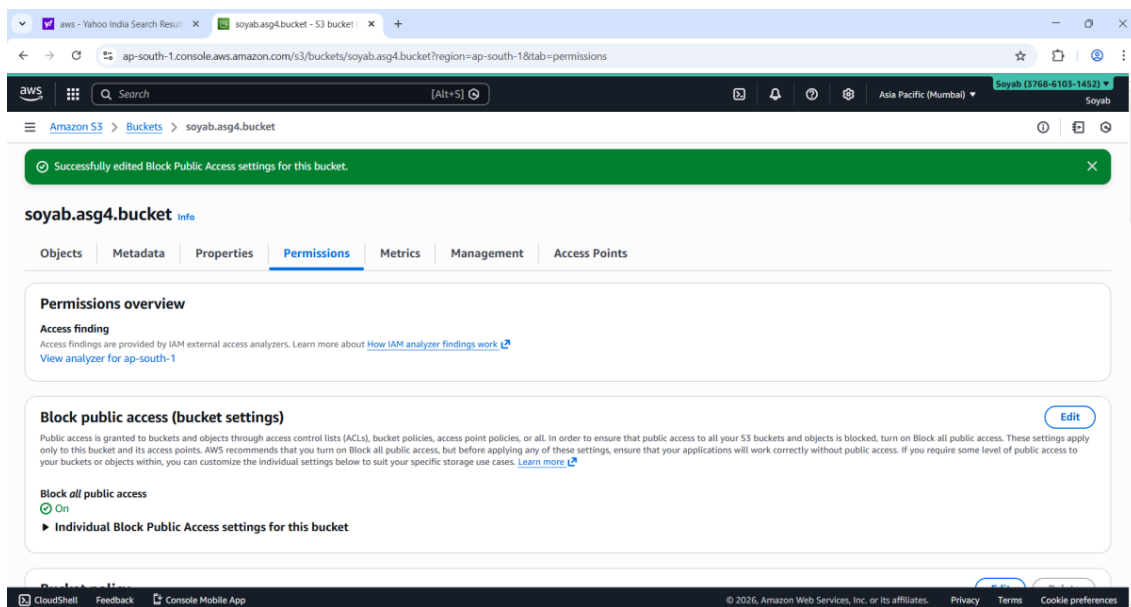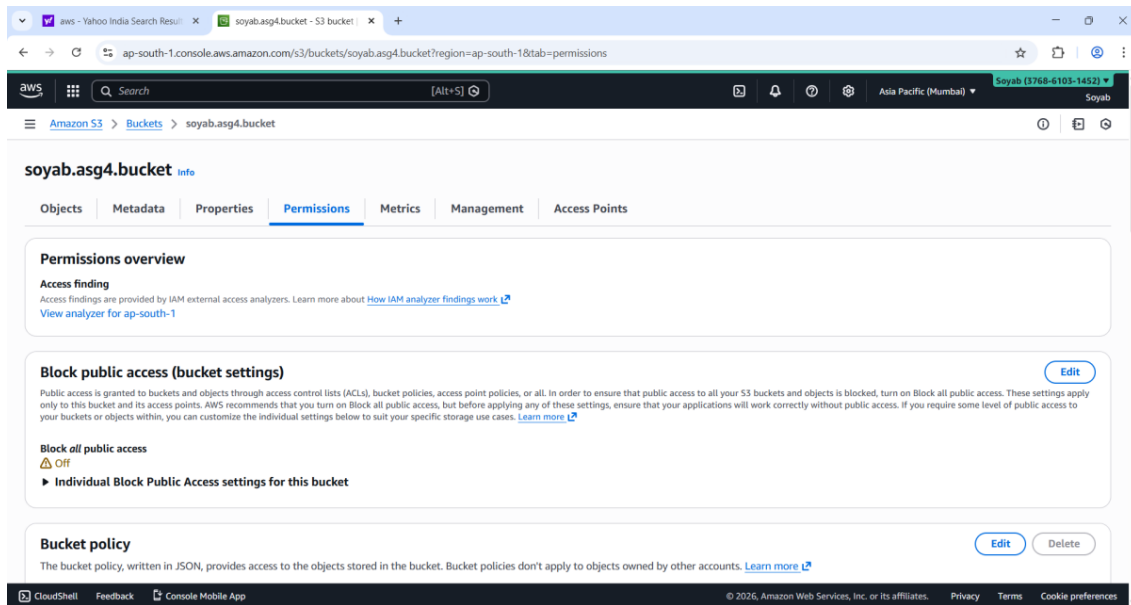

Step 13: Now go to each file and edit the ACL → Edit read access for everyone → click on save the changes.

aws - Yahoo India Search Results X aws1/index.html - Object in S3 X

ap-south-1.console.aws.amazon.com/s3/object/soyab.asc4.bucket?region=ap-south-1&prefix=aws1%2Findex.html&tab=permissions

Amazon S3 Buckets soyab.asc4.bucket aws1/ index.html

index.html

Copy S3 URI Download Open Object actions

Properties Permissions Versions

Access control list (ACL)

Grant basic read/write permissions to AWS accounts. [Learn more](#)

Grantee	Object	Object ACL
Object owner (your AWS account) Canonical ID: fe82edccb50b726a507593896f76766bb361b3c13a80044199c55fdeada28f	Read	Read, Write
Everyone (public access) Group: http://acs.amazonaws.com/groups/global/AllUsers	-	-
Authenticated users group (anyone with an AWS account) Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers	-	-

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Amazon S3 Buckets cse-104-website-upload index.html Edit access control list

Edit access control list

Access control list (ACL)

Grant basic read/write permissions to AWS accounts. [Learn more](#)

Grantee	Objects	Object ACL
Object owner (your AWS account) Canonical ID: 8a5ede5f9cb0187c3b45a0e4996129f0ed0ccdb4eed47a47ef4b36fc486fa95a	☒ Read	☒ Read ☒ Write
Everyone (public access) Group: http://acs.amazonaws.com/groups/global/AllUsers	☒ Read	☒ Read ☐ Write
Authenticated users group (anyone with an AWS account) Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers	☒ Read	☒ Read ☐ Write

When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object. [Learn more](#)

☐ I understand the effects of these changes on this object.

☒ You must select the check box to continue.

Access for other AWS accounts

Amazon S3 Buckets cse-104-website-upload next.html


next.html

Copy S3 URI Download Open Object actions


Properties Permissions Versions

Object overview

Owner 8a5ede5f9cb0187c3b45a0e4996129f0ed0ccdb4eed47a47ef4b36fc486fa95a	S3 URI s3://cse-104-website-upload/next.html
AWS Region Asia Pacific (Mumbai) ap-south-1	Amazon Resource Name (ARN) arn:aws:s3::cse-104-website-upload/next.html
Last modified January 28, 2026, 07:51:56 (UTC+05:30)	Entity tag (Etag) dfbed87f1b8290f66cb785ce34658cf2
Size 141.0 B	Object URL https://cse-104-website-upload.s3-ap-south-1.amazonaws.com/next.html
Type html	
Key next.html	

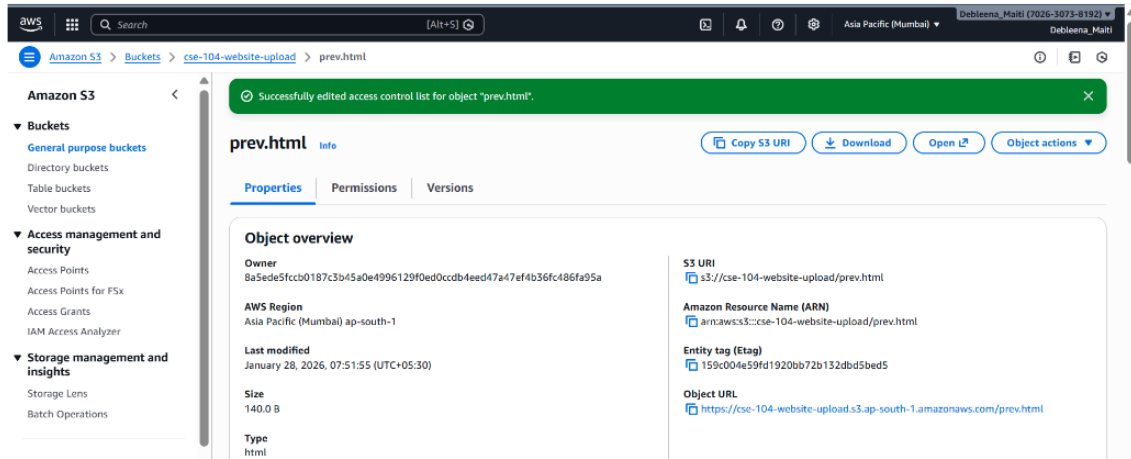


Step 14 : Now open any file→ copy the URL→ Open it in New Window→ and it opened

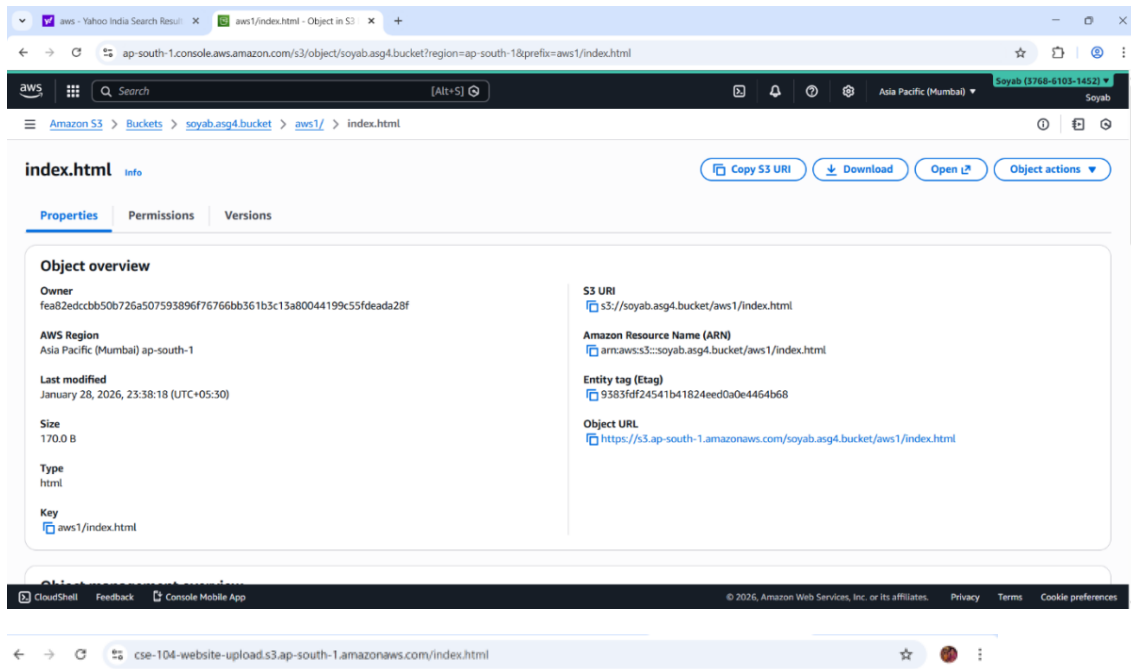

Index

[Next](#) [Prev](#)



Prev

[Index](#)

Index

[Index](#)