



Assignment No. 8

Problem Definition: - Deploy a project from a local machine to GitHub and vice versa.


Steps 1:-Create a new Public Github Repository. Click on 'Create a new repository' to proceed. Then give Repository name.

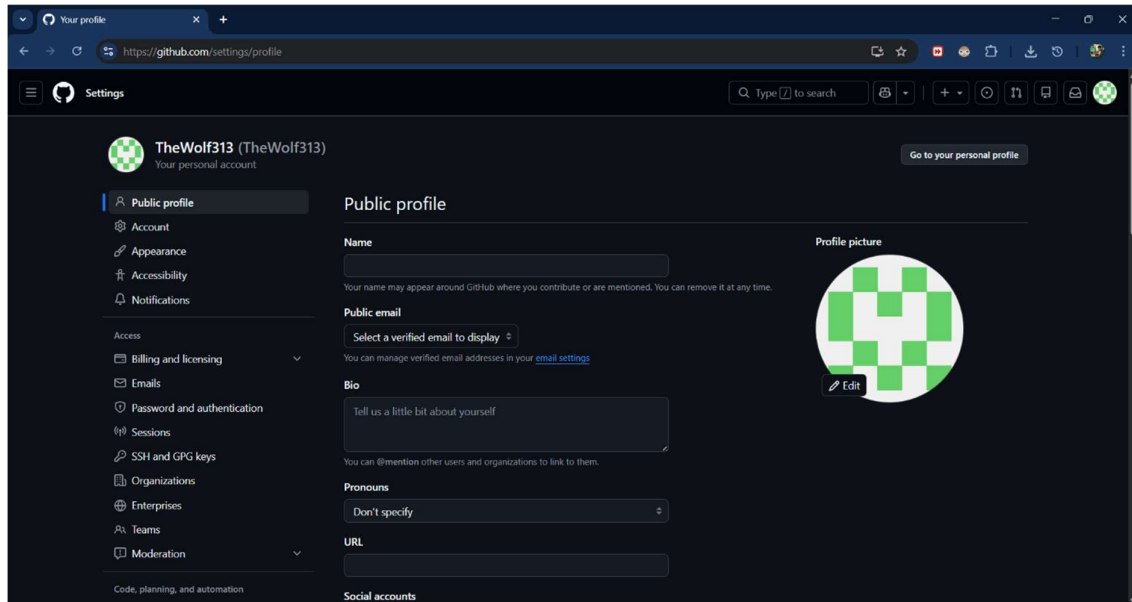

Step 2:Go to profile then click on Settings then Developer settings then generate new token (classic).

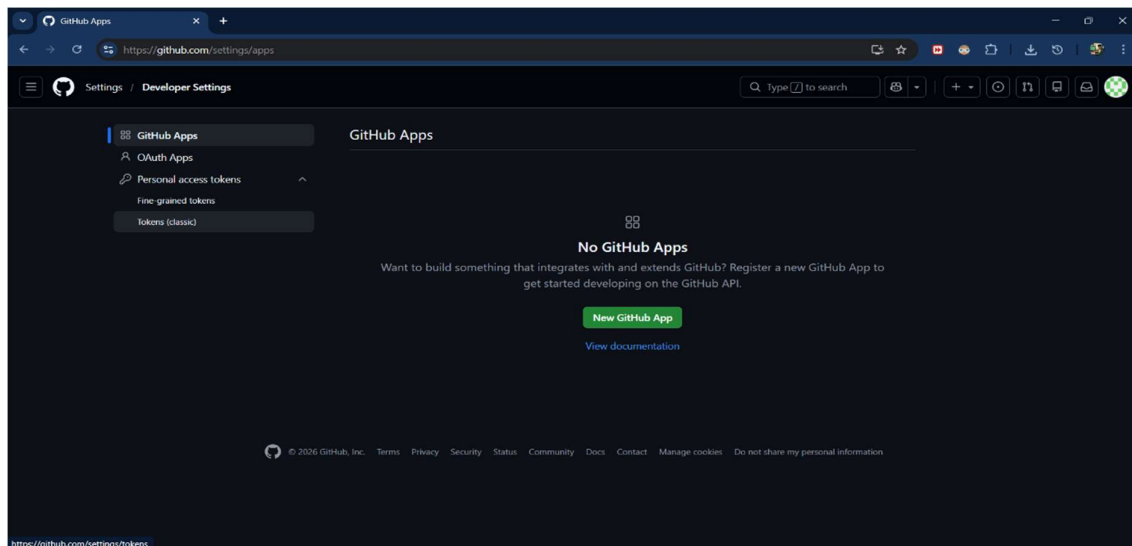

Step 3: Set Note, Expiration Date Generate token. for as long as possible and select all scopes.

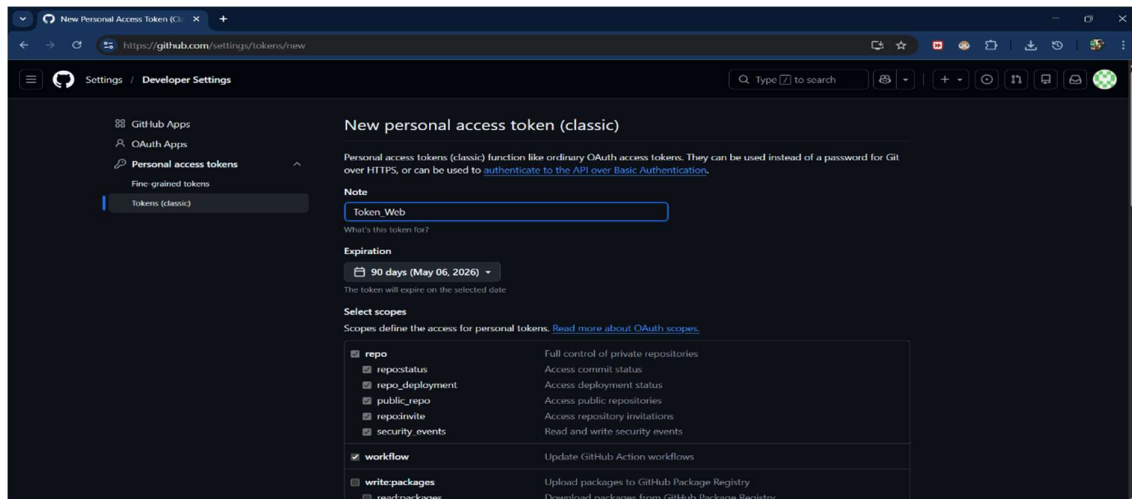

Step4: Now Run the following commands.

```
MINGW64/c/Users/Lenovo/Desktop/AWS_WEBSITE

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE
$ git init
Initialized empty Git repository in C:/Users/Lenovo/Desktop/AWS_WEBSITE/.git/

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ git config --global user.name "Soyab"
bash: gitconfig--global: command not found

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ git config --global user.name "Soyab"
git: 'config--global' is not a git command. See 'git --help'.

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ git config --global user.name "Soyab"

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ AC

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ AC

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ git config --global user.email "itsmdsoyab18@gmail.com"


Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ AC

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ git add .

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ git commit -m "1st commit"
[master (root-commit) 39063d0] 1st commit
3 files changed, 102 insertions(+)
create mode 100644 index.html
create mode 100644 next.html
create mode 100644 previous.html

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/AWS_WEBSITE (master)
$ git remote add origin |
```

Step 5: Open the repository and see all files have been Now click on code and copy the clone HTTPs. successfully added.

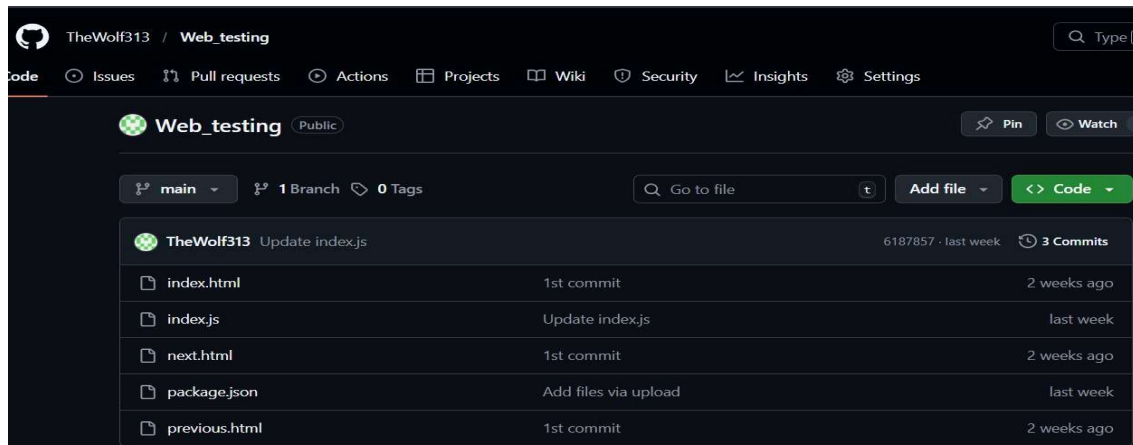

Step 6: Now we have to do it vice versa and run the following command to do it.

```
MINGW64/c/Users/Lenovo/Desktop/cloning_folder/Web_testing
Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/cloning_folder
$ git clone https://github.com/TheWolf313/Web_testing.git
Cloning into 'Web_testing'...
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 5 (delta 0), reused 5 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (5/5), done.

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/cloning_folder
$ ls
Web_testing/

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/cloning_folder/Web_testing (main)
$ git add .

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/cloning_folder/Web_testing (main)
$ git commit -m "Updating files"
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/cloning_folder/Web_testing (main)
$ git push
Everything up-to-date

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/cloning_folder/Web_testing (main)
$ git pull origin main
From https://github.com/TheWolf313/Web_testing
* branch      main       -> FETCH_HEAD
Already up to date.

Lenovo@LAPTOP-4L6K8QT5 MINGW64 ~/Desktop/cloning_folder/Web_testing (main)
$ |
```

