


# Full Stack Developer.

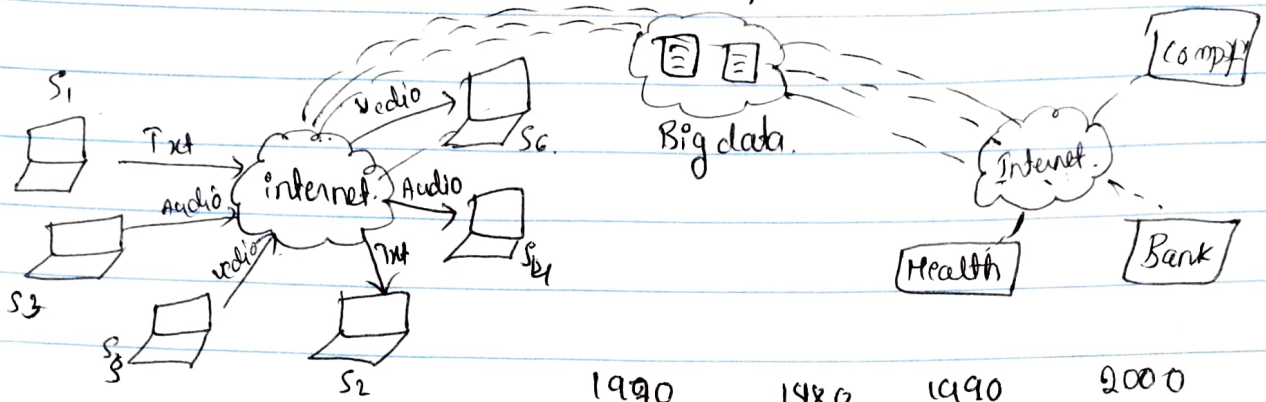

1989-1991  
 P1 → 1994  
 P2 → 2000  
 P3 → 2008

|             |      |      |        |
|-------------|------|------|--------|
| 1990        | 1980 | 1990 | 2000   |
| C           | C++  | JAVA | Perl   |
| functional. | OOPs | OOPs | Script |

latest version **P3.14.2**


3D dimensional.

## Syllabus:

- \* Basics
- \* Numerical Program
- \* Recursion
- \* Patterns
- \* Arrays
- \* Strings


## Software.

- Python.org  
 ↳ P3.14.2
- Pycharm.
- Visual Studio code.



## Introduction:


1950's  
 ↓  
 Semi-conductor  
 ↓  
 Transistor.

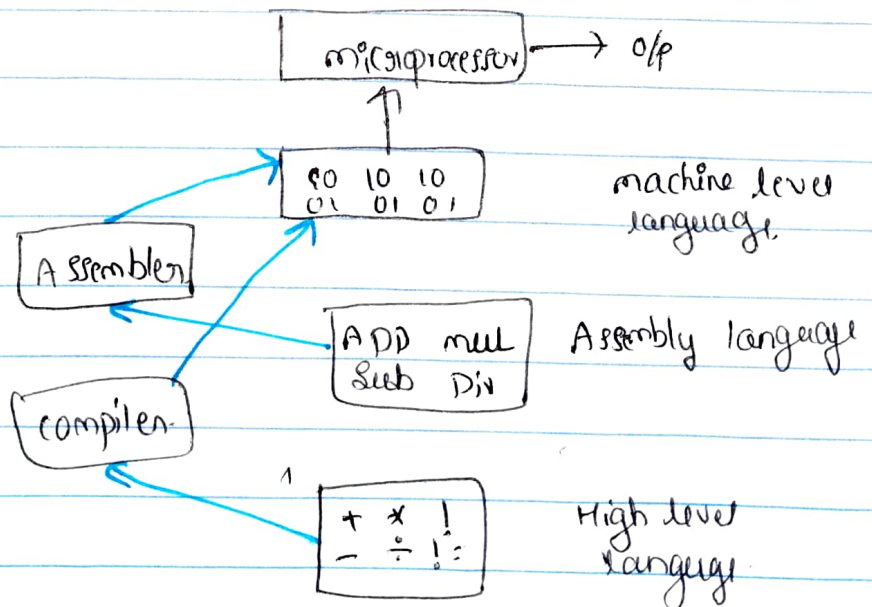

Hacker rank  
 Hacker earth  
 Leet code  
 greek for geeks



## Diff b/w Compilation & Interpretation.

Compiler.

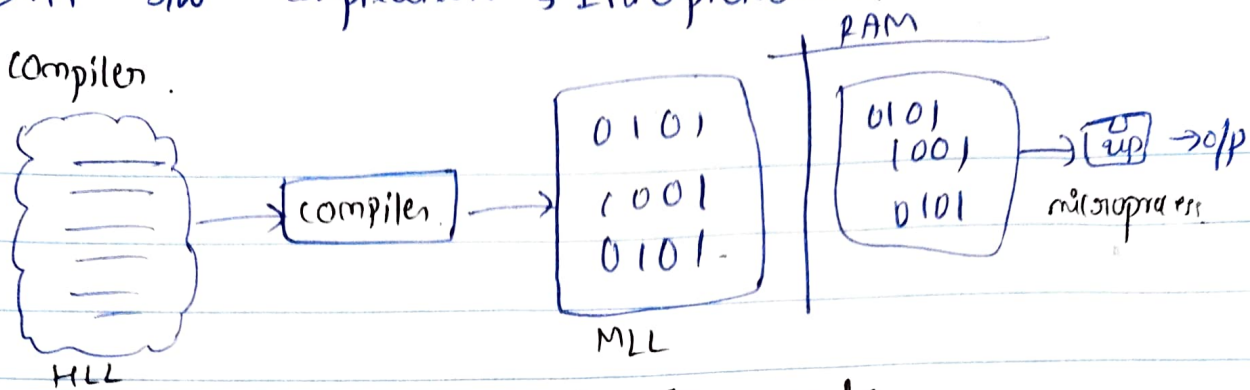

→ at time whole code is execute.

Interpreter → line by line execution

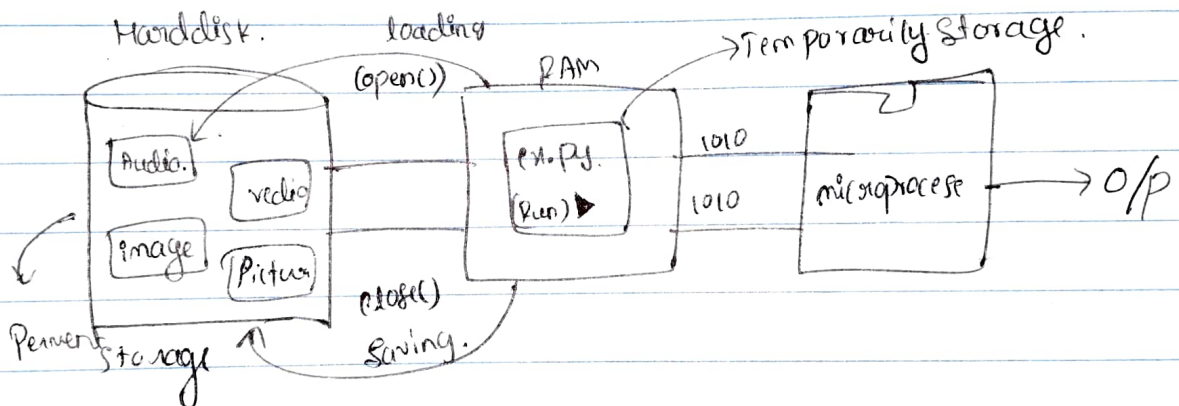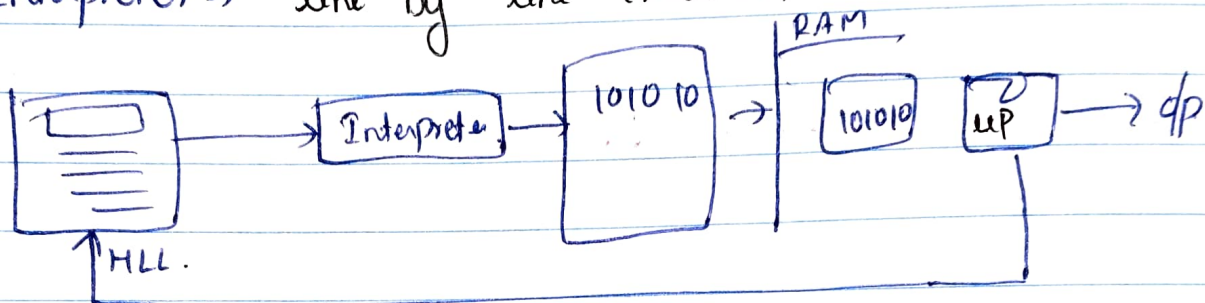

Python is platform independent.

PVM - Python Virtual Machine. Heart of Python

→ when PVM install in compilation & execution, then it will independent Platform.

- By default it will store in String format  
`a = int(input("Enter a value:"))`

- concatenation - add on different add strings.

→ Conditional Statement (if, else, elif)



28/07/2026

# Looping Statements → for while.

1) for

a) without range:

for i in elements

||| } Block of code  
# remaining statements.

Ex: for i in 1,2,3,4:

Print(i)

o/p  
1  
2  
3  
4

str = "pooja"

for l in str:

Print(i)

o/p: p  
o  
o  
j  
a

## 2) Range function in for loops

1) Range (Stop)

→ for var\_name in range (Stop-value):

2) range (Start, Stop)

||| } logic

3) range (Start, stop, step)

# remaining statement

2) range (Start, Stop)

for i in range(11,16):

Print(i)

range

o/p - 11  
12  
13  
14  
15

Print(i)

o/p - 11  
12  
13  
14  
15

Ex: for i in range(5):

Print("Kgs")

o/p → Kgs  
Kgs  
Kgs  
Kgs  
Kgs


3) range (Start, stop, step): → logic.

for i in range(2, 11, +2):

Print(i)

→ 2  
4  
6  
8  
10

## ② While loop

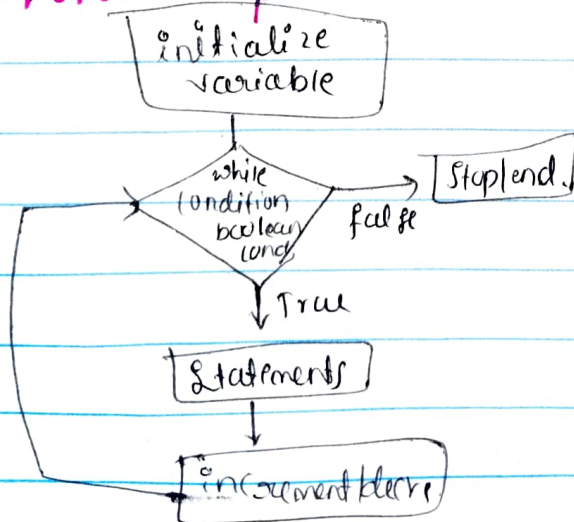

Syntax:

initialize variable

while (bool-cond):

||| } logic

increment/decrement

# remaining statements

(x: i = 0

while (i ≤ 4):

print("Python")

i = i + 1

print(i)

Python  
Python  
Python  
Python  
Python  
5

Python  
Python  
Python  
Python  
Python

ignored by  
compiler.

## \* Jumping Statements

- Break → for i in range(5):  
if i == 3:  
break  
print(i)

Continue  
pass

for i in range:  
if i == 3:

o/p = 0  
1  
2

for i in range(5):  
if i == 3:

pass  
print(i)

→ o/p = 0  
1  
2  
3  
4

continue  
print(i)

o/p = 0  
1  
2  
4