


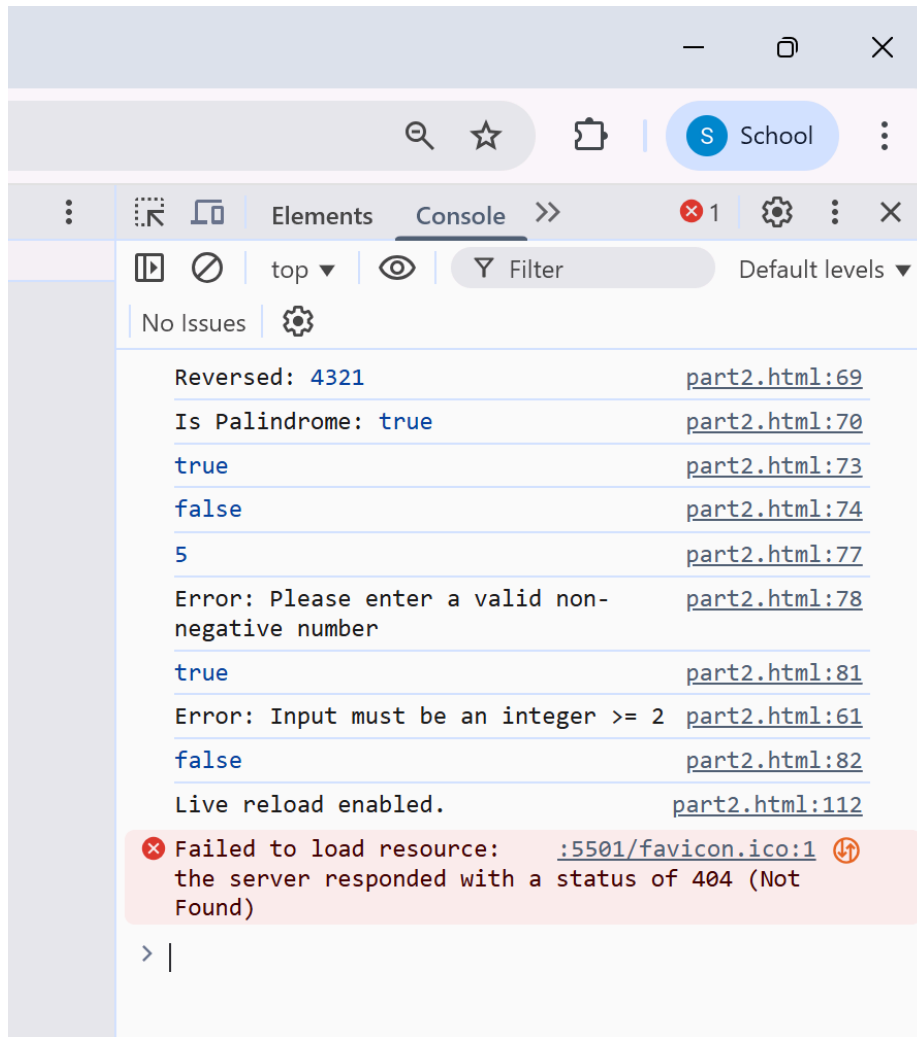

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
  <meta charset="UTF-8">
```

```
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
  <title>Document</title>
```

```
</head>
```

```
<body>
```

```
  <script>
```

```
    function reverseNumber(num) {
```

```
      if (typeof num !== "number" || isNaN(num)) {
```

```
        throw new Error("Invalid number input");
```

```
      }
```

```
      const isNegative = num < 0;
```

```
      const reversed = parseInt(
```

```

    Math.abs(num).toString().split("").reverse().join("")
  );
  return isNegative ? -reversed : reversed;
}

function isPalindrome(num) {
  return num === reverseNumber(num);
}

function isStringPalindrome(str) {
  if (typeof str !== "string") {
    throw new Error("Input must be a string");
  }
  const cleaned = str.toLowerCase().replace(/[^a-z0-9]/g, "");
  return cleaned === cleaned.split("").reverse().join("");
}

function safeSqrt(input) {
  try {
    let num = parseFloat(input);
    if (isNaN(num) || num < 0) {
      throw new Error("Please enter a valid non-negative number");
    }
    return Math.sqrt(num);
  } catch (err) {
    return `Error: ${err.message}`;
  }
}

const isPrime = (num) => {
  try {
    if (typeof num !== "number" || !Number.isInteger(num) || num < 2) {
      throw new Error("Input must be an integer >= 2");
    }
    for (let i = 2; i <= Math.sqrt(num); i++) {
      if (num % i === 0) return false;
    }
    return true;
  } catch (err) {
    console.log("Error:", err.message);
    return false;
  }
};

```

```
console.log("Reversed:", reverseNumber(1234));  
console.log("Is Palindrome:", isPalindrome(-121));
```

```
console.log(isStringPalindrome("Racecar"));  
console.log(isStringPalindrome("Hello"));
```

```
console.log(safeSqrt(25));  
console.log(safeSqrt(-9));
```

```
console.log(isPrime(13));  
console.log(isPrime("abc"));
```

```
</script>
```

```
</body>
```

```
</html>
```