

JFTSE — Club Match Native Validation

Official-client protocol and lifecycle evidence for the supported Warfare Basic compatibility slice

Server repository: ThewindMom/JFTSE

Branch: feature/club-match-mode

Validated source: 5a29788bd46f97cdc69306b0cffdf84a49ad96d6

Implementation sequence: 186962ad → 7abe015d → a7d1dcea → b8613d36 → 5a29788b

FantaTennis.exe SHA-256:

5477f0827acae66976403aecd2e9ebffeb4fa28da1fedae5f9541ec25e336c31

Native environment: Wine 8.0.2; two independent Win32 prefixes and 1280×800×24 displays

Validation date: 2026-08-13 UTC

Executive summary

Two isolated, unmodified copies of the official Fantasy Tennis client completed the main Club Match Warfare Basic lifecycle against JFTSE commit

5a29788bd46f97cdc69306b0cffdf84a49ad96d6. Native runtime and decoded service evidence establish Warfare initialization, type-6 Basic room creation and listing, an opposing-guild join and roster, the Club-specific ready/countdown/designated-start exchange, both relay registrations, sustained 0x0414 gameplay relay traffic, point progression, deadline expiry, and clean return to the waiting room.

For **non-tied** matches, JFTSE sent exactly one 0x26FC 00 to each material client after genuine 0x26FB expiry reports. The guest rendered LOSER and a Defeat result; the host was captured leading at 00:01, but the alleged host-result image was audited and is only gameplay. No host WINNER or Victory panel is claimed.

For the fresh **1-1 tied** deadline, both clients emitted genuine 0x26FB. JFTSE deliberately sent no 0x26FC, displayed no result panel on either client, and returned both clients cleanly to the room. This is the branch's current compatibility behavior while retail tie-break semantics remain unknown; it is **not evidence that retail Fantasy Tennis behaved this way**.

Guest disconnect during countdown also cancelled the countdown with 0x26F8 01 00, preserved a stable host MASTER, and allowed the room to relist, the guest to reconnect, and a later native rejoin to succeed.

Proven scope: official-client Warfare Basic (roomType=6 , wire mode=0) through initialization, create/join, ready/countdown/start, relay gameplay, expiry, non-tied guest result, tied no-result compatibility handling, room return, and countdown-disconnect relist/rejoin.

This is not a “fully complete” Club Match claim. Result UI is incomplete on the winning host, several failure and room-deletion paths remain without native proof, retail tie semantics are unknown, Warfare Pet is unsupported, and no rewards, rankings, guild points, Castle effects, schedules, or seasons are implemented or claimed.

Missing / not proven / non-claims

This section is intentionally prominent. “Implemented” or “server-tested” is not treated as native-client or retail proof.

Missing or uncertain item	Accurate publication boundary
Host winner UI	Not captured. There is no host <code>WINNER</code> /Victory panel. The prior alleged host-result screenshot was audited as gameplay at <code>00:01</code> .
Result byte <code>00</code>	Consistent with red-side victory and the guest's visible Defeat. The host winner panel remains absent, so full two-sided UI interpretation is not proven.
Duplicate/non-designated start	The native UI did not emit duplicate or non-designated <code>0x26F9</code> attempts. Server coordinator tests are not native proof.
Duplicate/native expiry boundary	Native clients emitted expiry after server deadline in the non-tied runs, but the UI did not provide a controlled duplicate/early-expiry experiment. Server idempotence tests are not native proof of every client boundary.
Gameplay-time relay disconnect rollback	Not completed after the final fixes.
Withheld-relay failure	Not completed after the final fixes.
Final-occupant room deletion	Not completed.
Retail tied result	No retail result byte or tie-break rule was recovered. No draw byte was invented. The current no-result tie behavior is a JFTSE compatibility choice, not a retail claim.
Warfare Pet	Not implemented or native-validated. Room type 7/mode 1 remains outside this slice.
Rewards and metagame	No rewards, rankings, player statistics, guild points, Castle ownership/effects, retail schedules, or season behavior are claimed.
Original retail semantics generally	Packet/UI observations are from this official client against current JFTSE. Branch behavior is identified separately from unknown original-server policy.

Evidence classification

Class	Findings in this work
Observed native runtime	Genuine 0x2700 → 0x2701 initialization; 0x1389 create; 0x138B join; opposing roster; 0x26F7 / 0x26F8 /designated 0x26F9 ; both relay joins; sustained 0x0414 ; points; 0x26FA ; genuine 0x26FB ; non-tied 0x26FC 00 ; guest Defeat; tie without result; room return; countdown disconnect/relist/rejoin.
Static client reverse engineering	Room types 6/7 select Club Match paths; Warfare/Warfare Pet identity findings informed the server mapping. Static findings are not promoted where native evidence is absent.
JFTSE source/tests baseline	Packet declarations, handlers, room coordinator/launcher/session behavior, relay decoder, focused regressions, 62-test full reactor, and package success.
Compatibility interpretation	Native create (roomType=0, mode=0) maps to stored/S2C Warfare (6,0) on server type 7; tied 1-1 expiry sends no result until retail semantics are known; ordinary Basic reward/stat mutations are suppressed.
Implementation in this branch	Dedicated type-7 Club service, Warfare initialization, balanced opposing-guild admission, master-ready exemption, guarded countdown/start, relay/deadline lifecycle, idempotent non-tied settlement, and native relay serial alignment.

Exact supported lifecycle

Stage	Native/protocol observation	Verdict and limit
Warfare entry	Genuine C2S 0x2700 produced S2C 0x2701 ; returned guild identity with state 3	Observed native runtime. This identifies the supported Warfare state; it does not prove retail scheduling policy.
Create	Host selected Basic; native C2S 0x1389 had roomType=0 , mode=0 ; type-7 JFTSE returned/listed/info'd roomType=6 , mode=0	Observed. Create response/list/info identity is type 6.
Join/roster	Guest emitted genuine 0x138B ; 0x138C returned result=0, roomType=6, mode=0 ; opposing guilds rendered on red/blue sides	Observed with both clients.
Ready/countdown	Guest emitted 0x26F7 ready=true ; both received full 0x26F8 countdown; host remained MASTER without Ready	Observed. Master exemption works through asynchronous launch recheck.
Start	Designated native participant emitted 0x26F9	Observed designated path. Duplicate/non-designated native attempts not emitted.
Relay/game start	Both received relay settings, joined the same relay session, and received successful game start plus 0x26FA 2c 01 00 00 (300 seconds)	Observed. Final serial fix accepted by native gameplay.
Gameplay	Sustained decoded C2S 0x0414 relay frames, visible movement, and native 0x183F point progression	Observed. No separately proven strike/serve key is claimed.
Non-tied deadline	Native point/score progression; both emitted 0x26FB ; JFTSE sent exactly one 0x26FC 00 per client; guest rendered Defeat; both returned to room	Observed twice. Byte 0 is consistent with red victory, but host Victory UI is absent.
Tied deadline	Authoritative state tied 1-1; both emitted 0x26FB ; no 0x26FC ; no result panel; clean return to same room	Observed JFTSE compatibility behavior, not retail tie semantics.
Countdown disconnect	Genuine guest TCP disconnect; 0x26F8 01 00 cancellation; host stable as MASTER ; room relisted 1/4; guest reauthenticated and later rejoined	Observed. Gameplay-time relay rollback remains unproven.

Provenance and implementation history

Client and source identity

Artifact	Exact identity
Official client archive	<code>https://www.jftse.com/client/FantaTennis.7z</code> ; known archive SHA-256 <code>c19ca21b8e2ab091953b2f631e48853b6477400f4d7000682ac7440f9994f12e</code>
FantaTennis.exe	<code>5477f0827acae66976403aecd2e9ebffeb4fa28da1fedae5f9541ec25e336c31</code> in immutable, host, and guest copies
Validated branch source	<code>5a29788bd46f97cdc69306b0cffdf84a49ad96d6</code>
Fresh validation game jar	<code>4800704cc38f4d0bc788b1f0b7c10cab7d1c91c706deae37af7b32c991261319</code>
Fresh validation relay jar	<code>82178bebdba55b968bb7b98332ae8d639d7f04bdb5baf46c92d509cac2de5a723</code>
Final safe evidence archive	<code>jftse-club-match-final-validation-20260813-safe-evidence.tar.gz</code> ; 4,036,544 bytes; SHA-256 <code>3606bf09de966a29e03fdaafe917e7c36146dcc056ac4b1d50f008ef209e2577</code>
Safe archive inventory	28 evidence files and 10 audited screenshots, plus directories/index/manifest/report entries

The fresh lab used Wine 8.0.2 with two independent Win32 prefixes, task-owned runtime directories, `1280×800×24` X displays, identities in different disposable guilds, and ordinary mouse/keyboard UI input. No synthetic game-packet injection, memory patch, or direct handler call is counted as native proof.

Final commit sequence

Commit	Purpose and evidence consequence
<code>186962ad1fb2c0d478a7ebed6c2e3be45f847679</code>	Implemented Warfare initialization (<code>0x2700</code> → <code>0x2701</code>) and packet contract.
<code>7abe015d2333a82907f20730e1308824707315e1</code>	Allowed balanced opposing teams below room capacity, enabling the native two-player 1-v-1 slice in a 4-slot room.
<code>a7d1dcea863ea0b3a315e32eaff0c20a0fdc377</code>	Exempted Club Match <code>MASTER</code> from the ready prerequisite in countdown coordination.
<code>b8613d3667983288aff0f2d2f9ec7610be3f21b8</code>	Applied the same master exemption in the asynchronous relay-wait launch recheck; focused 15-test, full reactor, and package gates passed.
<code>5a29788bd46f97cdc69306b0cffdf84a49ad96d6</code>	Advanced the relay decoder serial after native registration; captured-frame regression, full reactor, package, and subsequent native relay gameplay passed.

Build and package gates

The final source was built with JDK 21. The captured final gates report:

- relay serial focused regression: **1 test, 0 failures, 0 errors, 0 skipped**;
- full 11-module reactor: **62 tests, 0 failures, 0 errors, 0 skipped; BUILD SUCCESS**;
- `mvn package -DskipTests`: **all 11 modules BUILD SUCCESS**.

The exact logs are included in the evidence inventory. One earlier package attempt affected by a concurrent build is not counted; the isolated rerun above is the claimed package gate.

Protocol and state model



```
guild/player DB S0
+ native Club action / C2S packet
+ type-7 room, countdown, and session guards
→ S2C response/broadcast and relay session
→ native gameplay/result/room UI
→ DB S1 with ordinary rewards/statistics intentionally unchanged
```

Packet	Direction	Role in validated slice	Evidence boundary
0x2700 / 0x2701	C2S / S2C	Warfare initialization and guild state 3	Native request/response observed; payload contract tested.
0x1389 / 0x138A	C2S / S2C	Basic room create and type-6 answer	Native create observed.
0x138B / 0x138C	C2S / S2C	Join and type-6 room identity	Native join observed.
0x26F7	C2S	Guest readiness	Native ready=true observed.
0x26F8	S2C	Countdown state/timestamps or 01 00 cancellation	Full countdown and disconnect cancellation observed.
0x26F9	C2S	Designated participant starts after countdown	One designated native path observed.
0x03ED / relay settings	C2S / S2C	Relay session registration	Both native registrations observed.
0x0414	C2S relay envelope	Sustained native gameplay relay	Final deployment decoded sustained traffic after the serial fix.
0x26FA	S2C	Four-byte game duration	2c 01 00 00 = 300 seconds observed on both.
0x183F	C2S	Point progression	Genuine point events observed and reflected in scores.
0x26FB	C2S	Client timer expiry report	Genuine reports from both clients in non-tied and tied runs.
0x26FC	S2C	One-byte winning side in non-tied matches	Exactly one 00 per client; omitted by compatibility design for tied 1-1.

The dedicated Club service is server type 7. Server type, room type, and wire mode remain separate concepts: this slice maps native create (0,0) to Warfare room identity (6,0). Warfare Pet (7,1) is not silently treated as equivalent.

Native visual walkthrough

Basic room and opposing-guild join

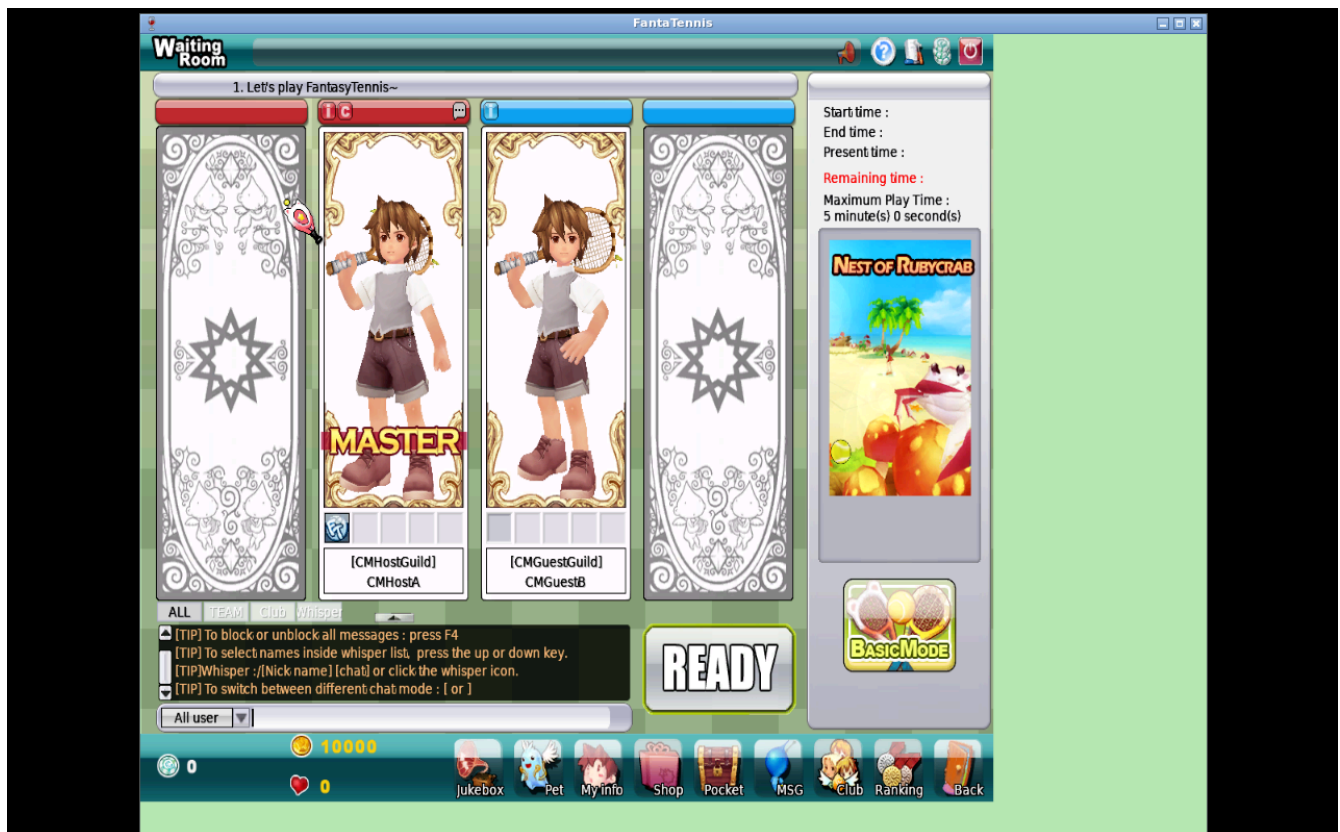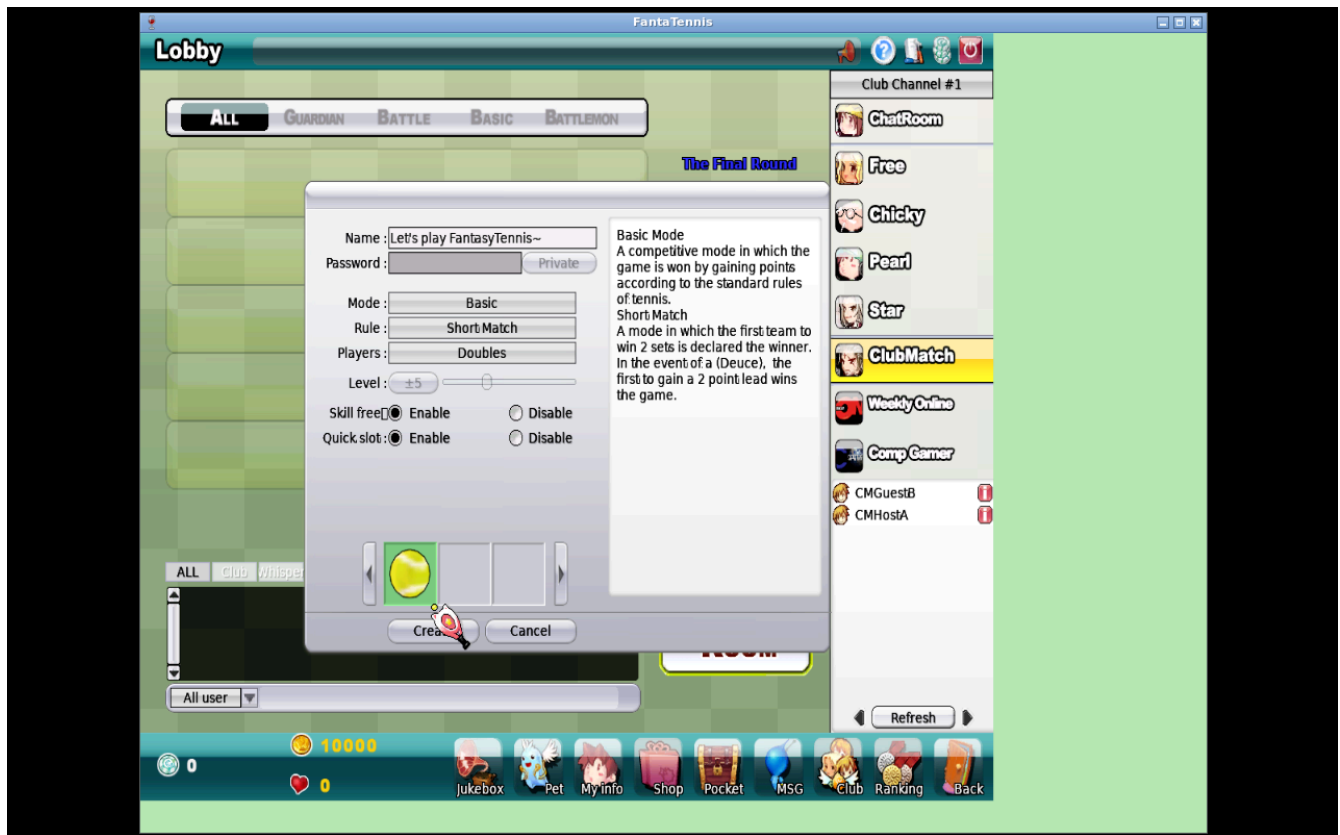


Final-deployment gameplay




The relay evidence records both `0x03ED` registrations and sustained native `0x0414` frames after commit `5a29788b`. Genuine `0x183F` traffic progressed the authoritative score. These images prove UI state; decoded packet and server evidence prove the protocol path.

Tied deadline compatibility behavior

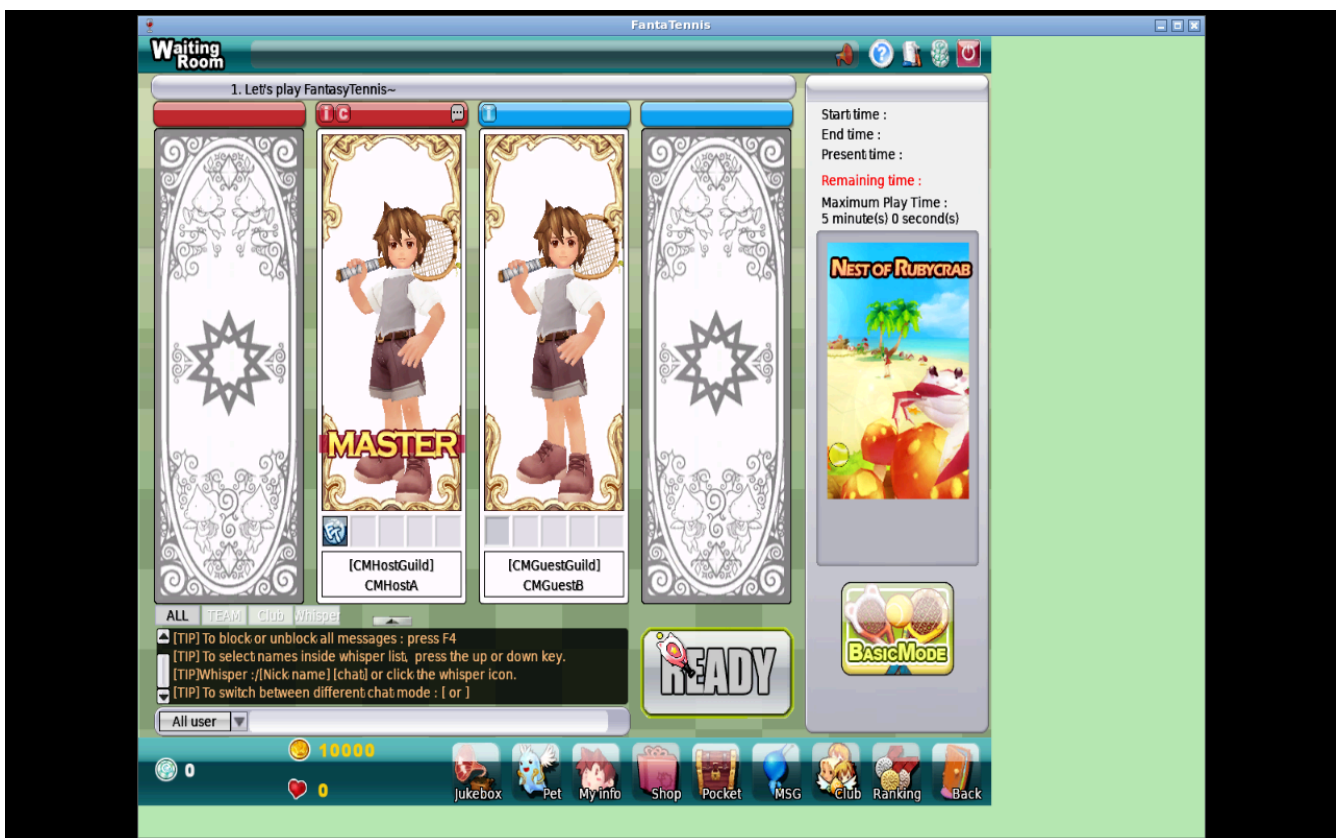

The server recorded tied sets 1-1, both clients emitted genuine 0x26FB, no 0x26FC was sent, and neither client displayed a result. The +15-second captures confirm the stable no-panel room state; they do not establish retail tie behavior.

Countdown disconnect, relist, and reconnect

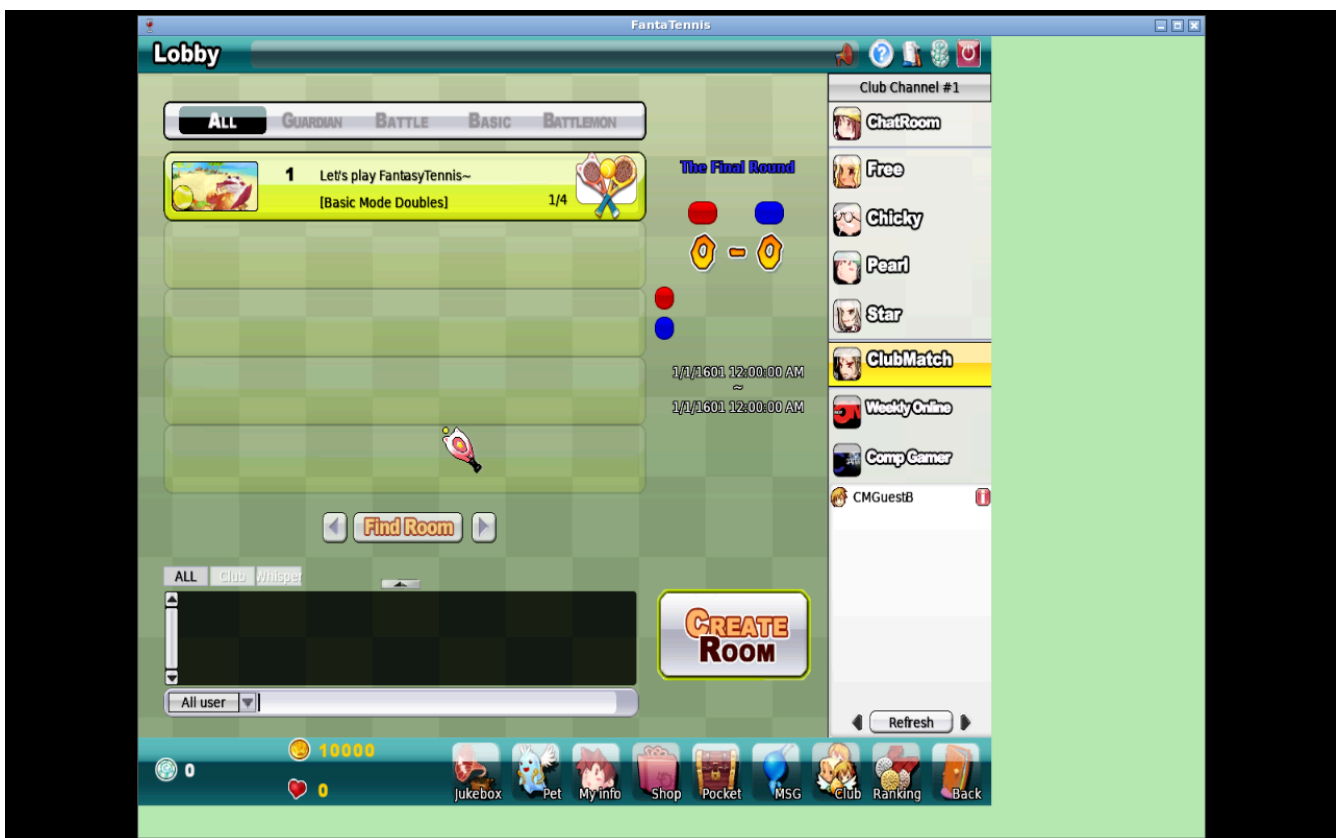

Decoded evidence records the guest TCP disconnect and S2C 0x26F8 01 00 cancellation. The same guest account reauthenticated and a later clean native rejoin succeeded. Crash/black frames from failed later Wine attempts were excluded and are not counted as evidence.

Database, non-mutation, and cleanup

The validation used disposable fixture identities only. For tied expiry, JFTSE logged that ordinary Basic rewards, rankings, player statistics, and guild records were not changed. This validates the branch's intentional non-mutation boundary; it does not establish future retail reward policy.

Before teardown, task fixture state was explicitly reset. The final DB postcheck shows both accounts status 0 with null server fields, both players offline, and zero nonempty fixture rows. The final resource postcheck records:

```
task_containers=0
task_networks=0
task_volumes=0
task_processes=0
listeners=0
displays=0
bulky_client_dirs=0
unsafe_pcaps=0
```

The shared `jftse-elemental-defense-native-net` remained present and was intentionally preserved. No native lab resources were restarted for publication.

Evidence security and curation

The external safe archive was hash-verified before curation. This report tracks decisive screenshots, decoded packet excerpts, exact provenance, test/package logs, DB postchecks, and cleanup proof. It intentionally does **not** track the tarball itself.

Excluded from Git publication:

- credential-bearing raw authentication PCAP and unsafe multi-port captures;
- login/authentication logs, credentials, tokens, and replayable session material;
- official client executables, client trees, Wine prefixes, and database volumes;
- deployed jars and other giant runtime artifacts;
- black/crash frames, calibration noise, and redundant screenshots.

The ten tracked PNGs were audited as valid 1280×800 RGB screenshots: no credential UI, black/crash frames, or malformed images were present. Text evidence was scanned for password/secret/token/key patterns. Matches were limited to empty packet password fields, disposable fixture names, and task-lab IP addresses; no fixture secret or credential value was published.

Evidence inventory

File	Purpose	Claim supported
Curated evidence README	Safety scope and directory navigation	Publication boundary
Curated evidence SHA-256 manifest	Hashes of every tracked evidence artifact	Evidence integrity
Initial provenance	Source/client/jar hashes and client start time	Exact runtime identity
Final head and jar hashes	Final source and deployed artifacts	Final deployment provenance
Full Club matrix excerpt	Create/join/ready/start/points/tie/rejoin decoded events	Main lifecycle and tied expiry
Final relay matrix	Both relay joins and sustained native relay frames	Post-fix relay gameplay
Tie deadline packet excerpt	Tied state, both 0x26FB , no result	Current tie compatibility behavior
Countdown disconnect packets	TCP disconnect and 0x26F8 01 00	Cancellation path
Server readiness	Service readiness and handler context	Observable lab startup
Focused relay regression	Captured-frame decoder contract	1-test focused green
Full reactor test log	JDK 21 11-module test gate	62-test green
Full package log	JDK 21 release package gate	11-module package success
Initial fixture	Disposable state and lab routing	Fixture provenance
Final fixture reset	Accounts/players/rows restored	DB cleanup
Final resource postcheck	Containers, volumes, listeners, displays, unsafe PCAP count	Lab cleanup
Host room creation	Native Basic selection	Create UI
Guest joined	Guest room presence	Join/roster UI
Host initial gameplay	Host court at 0-0	Native gameplay
Guest initial gameplay	Guest court at 0-0	Two-client gameplay
Host tied expiry, immediate	Host no-result room return	Tie compatibility UI
Guest tied expiry, immediate	Guest no-result room return	Tie compatibility UI
Host tied expiry, +15 s	Stable host waiting room	No delayed result panel
Guest tied expiry, +15 s	Stable guest waiting room	No delayed result panel
Host after countdown disconnect	Stable sole MASTER	Countdown cancellation
Post-disconnect relist	Room at 1/4 occupancy	Persistence/reconnect path

Final conclusion

The main Warfare Basic path is now genuinely native-green for this exact official client and JFTSE source: initialization, type-6 create/list/info, opposing-guild join, ready/countdown/designated start, relay registration and sustained gameplay, points, duration, expiry, a non-tied guest Defeat result, and room return all occurred through unmodified clients. A tied 1-1 deadline and a countdown disconnect also reached clean, explicit compatibility outcomes.

The evidence does not justify “Club Match complete.” The winning host panel, controlled native duplicate/non-designated attempts, gameplay relay rollback, withheld-relay rollback, final-occupant room deletion, retail tie semantics, Warfare Pet, rewards, rankings, guild points, Castle behavior, schedules, and seasons remain absent or unproven. Those boundaries are part of the result, not footnotes to it.