


Instances and merged recordings per well · 1,119 instances become 208 recordings

instances of a well that overlap or touch in time (gap of at most one second) are joined into one recording; the number of samples changes far less than the number of files, since the overlaps are duplicated samples

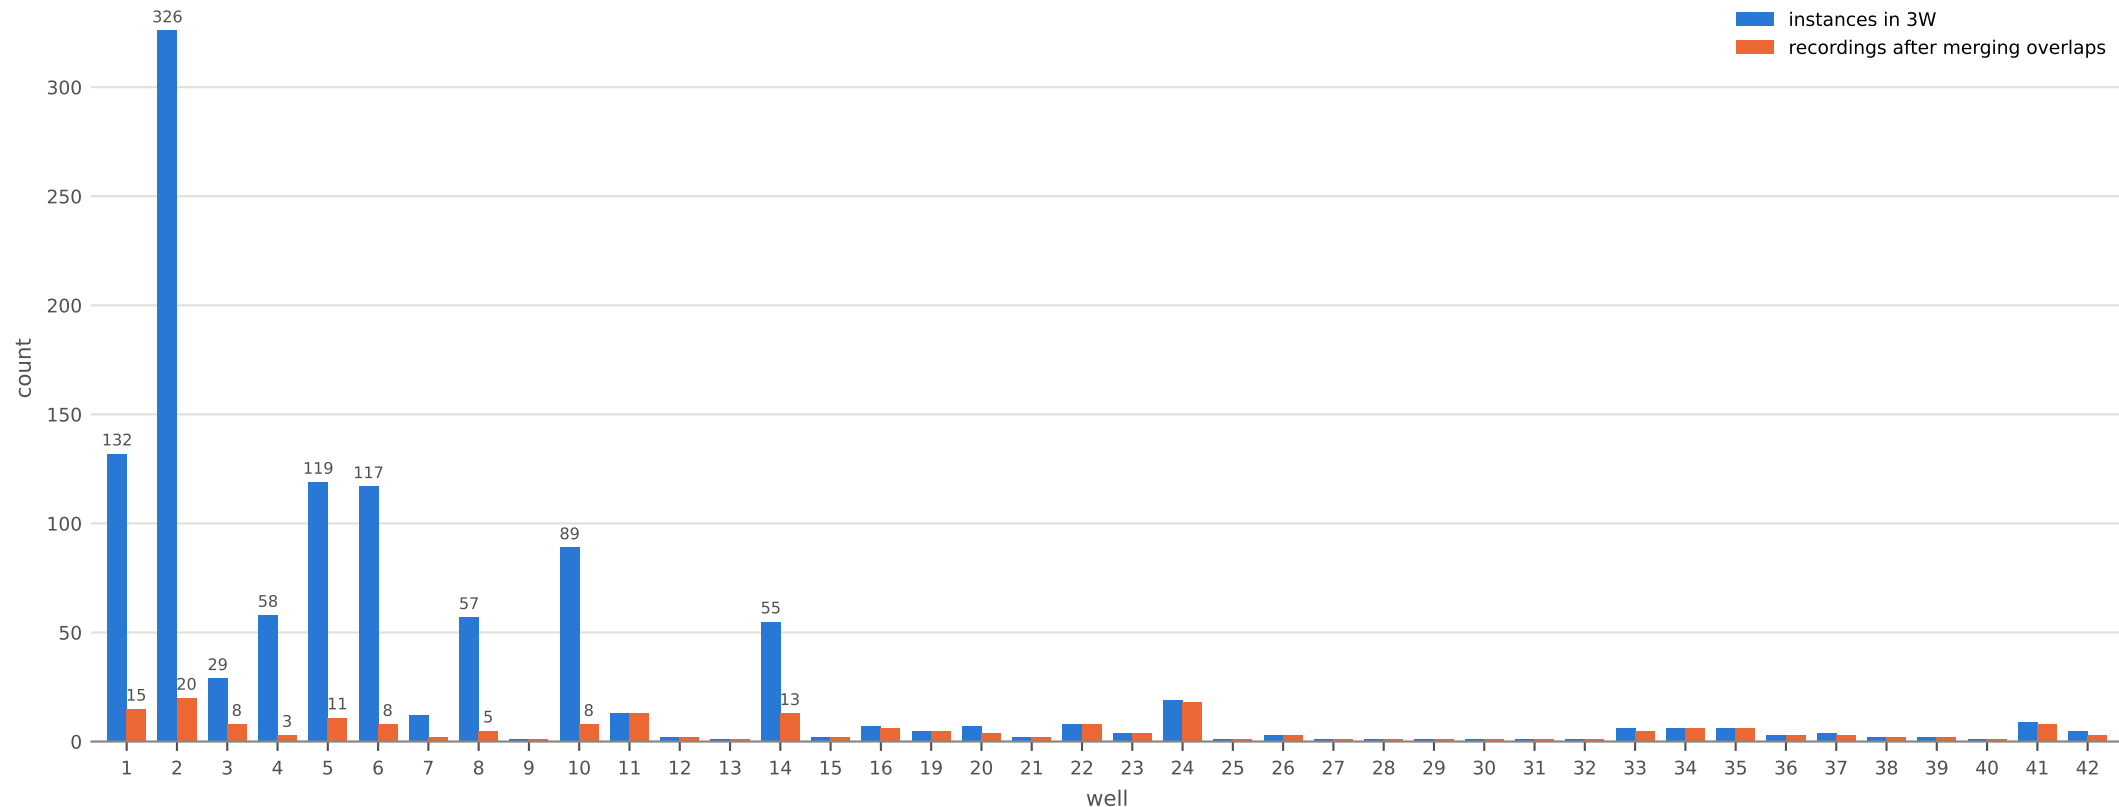


Overlap agreement — what two instances say about the same second

labels: 3W's class column, compared on every shared timestamp · sensors: the eight key sensors, readings compared at 1e-09 tolerance




Merged recordings · 208 recordings from 1,119 instances

top: length of every merged recording · bottom: how many fault-class folders (1 to 9) the instances of each recording came from — a recording that spans two events is the one case the reconstruction has to place explicitly

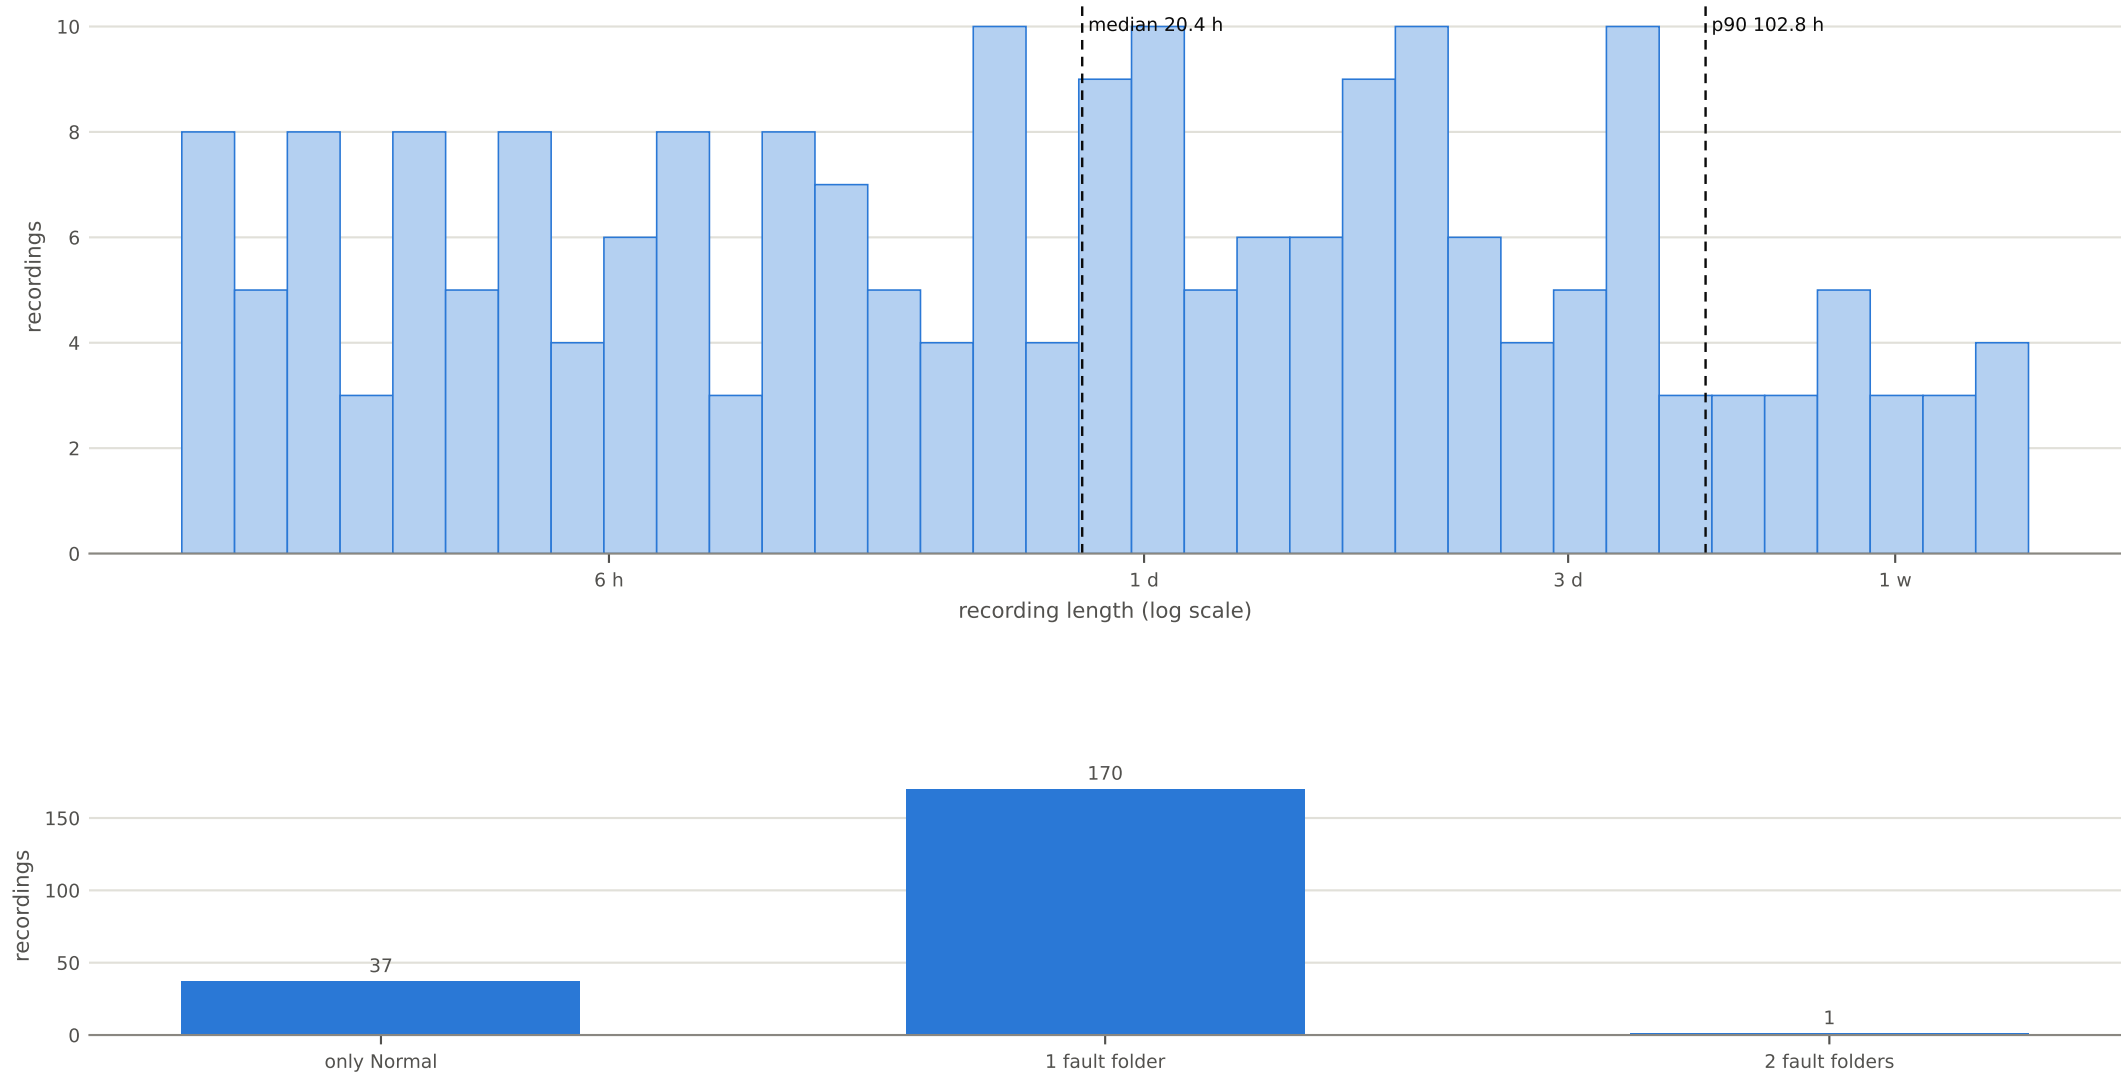

Label gaps inside the merged timelines · 1,106 unlabelled runs, 882 with the same class on both sides

top: length of every gap whose two flanks carry the same class (the class the reconstruction would give it) · bottom: every gap by kind — flanks agree, flanks disagree, or one flank only (the edge of a contiguous stretch)

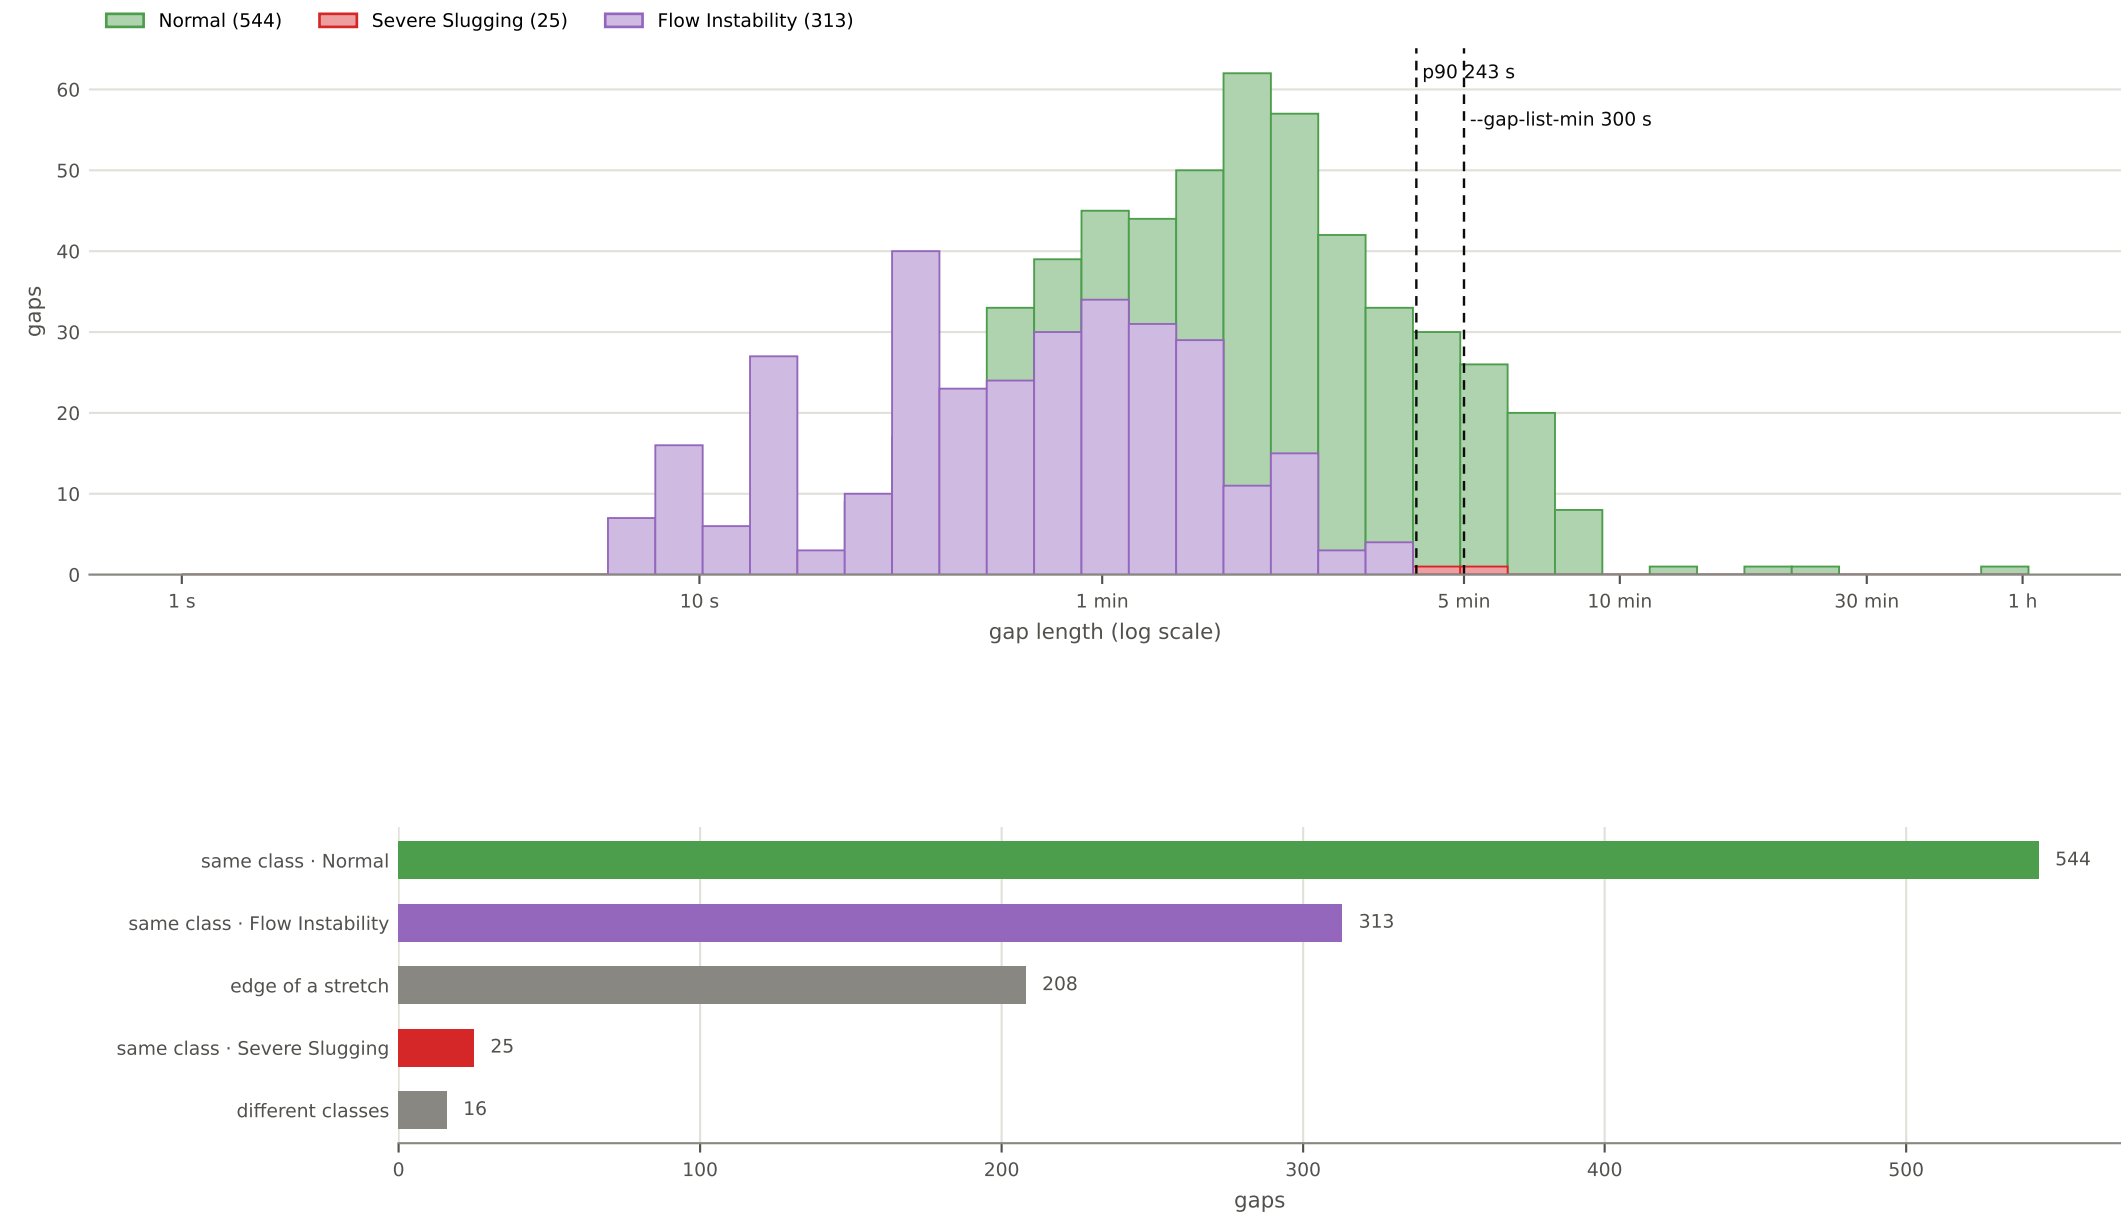

Same-class gaps against their recordings · 882 gaps

top: each gap's length divided by the length of the merged recording it sits in · bottom: the same gaps as points, recording length against gap length, with the list cutoff and the relabel bound of the reconstruction

