




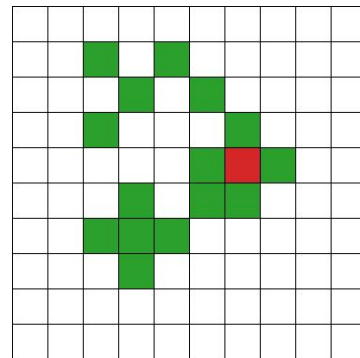
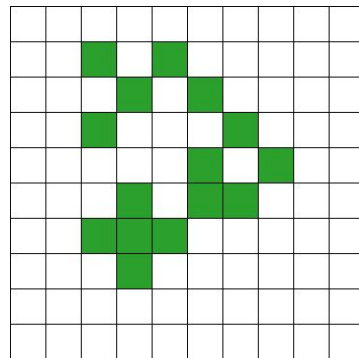
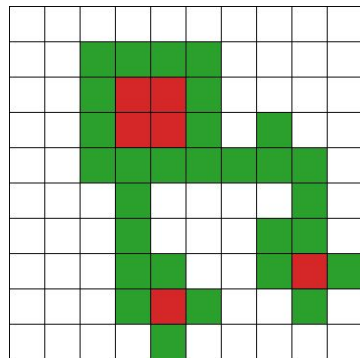


Comparação de resultados usando JSON e PNG como inputs

Eduardo, Thiago, Vítor

Task 00d62c1b



Task 00d62c1b

Usando JSON

"logic_explanation": "Identify all regions of 0s that are completely enclosed by 3s and cannot reach the grid boundary. Change all such 0s to 4s.",

"status": "correct"

Usando PNG

"logic_explanation": "Fill all white regions that are completely enclosed by green cells with red."

"status": "incorrect"

Análise de 10 tasks do treinamento

Usando JSON

10 corretos

0 incorretos

Tasks

00d62c1b

0a938d79

0b148d64

0ca9ddb6

0d3d703e

0dfd9992

0e206a2e

1a07d186

1b2d62fb

1b60fb0c


Usando PNG

1 corretos

9 incorretos

Modelo:

- 1) Pré-treinar o ViT do zero com os dados de treino aumentados
- 2) Pipeline proposto:

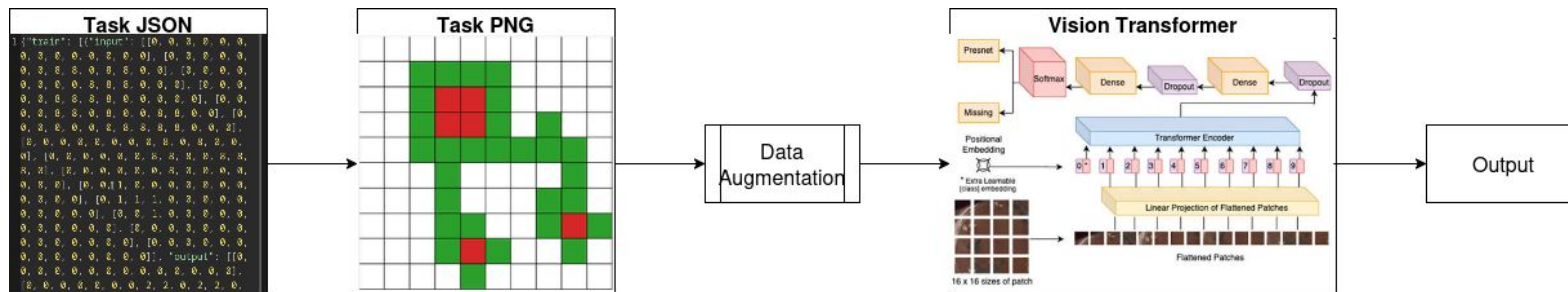

- A ideia é usar Test Time Training no modelo pré-treinado, utilizando data augmentation sobre a task atual para o fine-tuning.

Problemas atuais

O objetivo é que o output do ViT seja uma classificação multi-classe para cada pixel. Cada classe representaria uma cor.

Problema: ARC tem tamanho de grid variável

- existem meios de contornar isso (padding, patches)

Inicialmente, pretendemos limitar o tamanho do grid para testar o pipeline