

A – Inner Kernel Development

$\mathcal{M}_c, q, \Lambda_1, \Lambda_2$
 $\mathbf{s}_1, \mathbf{s}_2, \iota, t_c$
 $d_L, \psi, \alpha, \delta$


Custom Slice within Gibbs (SwiG)

- ✓ Improved mixing (This Work)
- ✓ Fast-slow optimisation
- ✓ Simple black-box integration
- ✗ Custom GW kernel

Standard Slice Sampling

- ✓ Simple
- ✓ Problem agnostic
- ✗ Poor mixing performance
- ✗ No structural optimisation

 Slow
 Fast

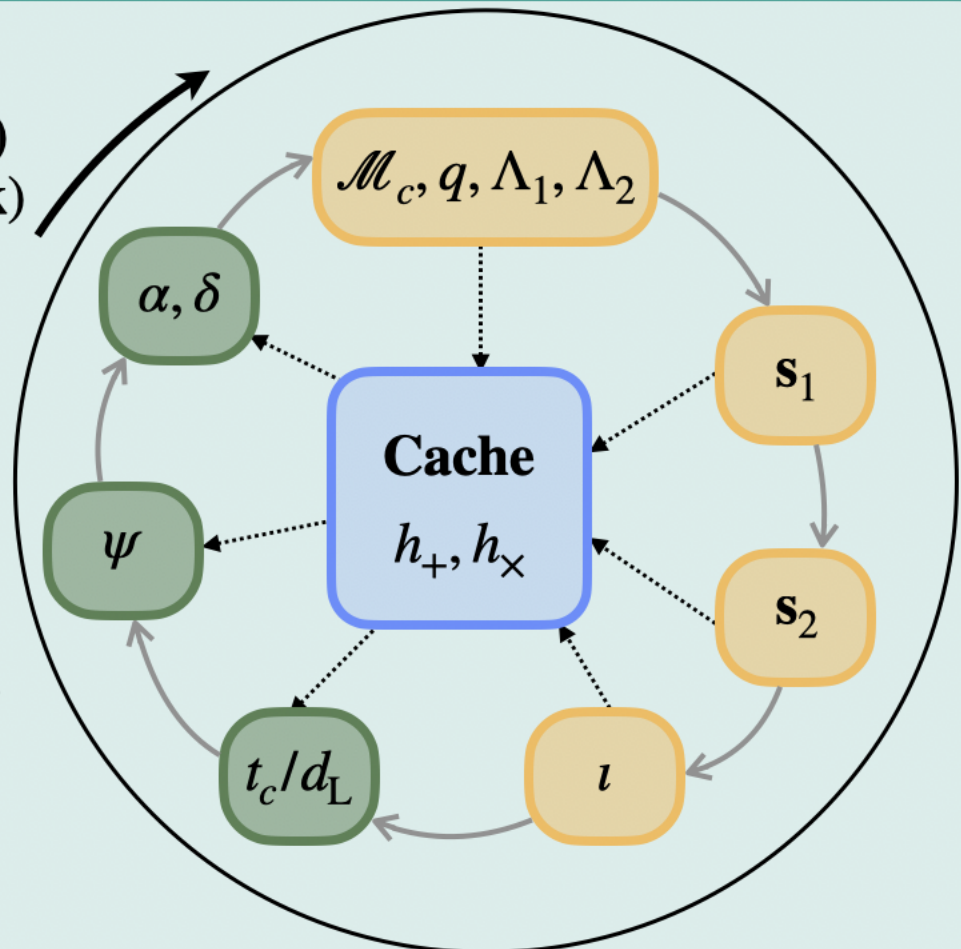

Credits: James Alvey

 Relative binning
 Full likelihood, 4 GPUs
 Full likelihood, 1 GPUs

