

# The solution

Browser

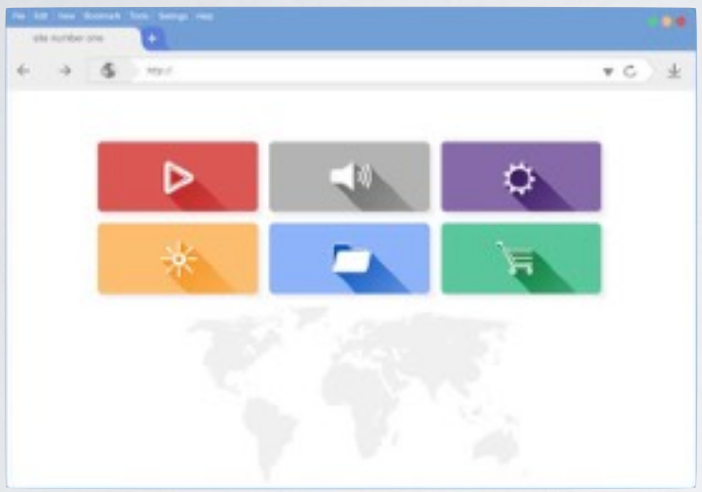

GET / eTag: J5LO35OC

304 (Not Modified)

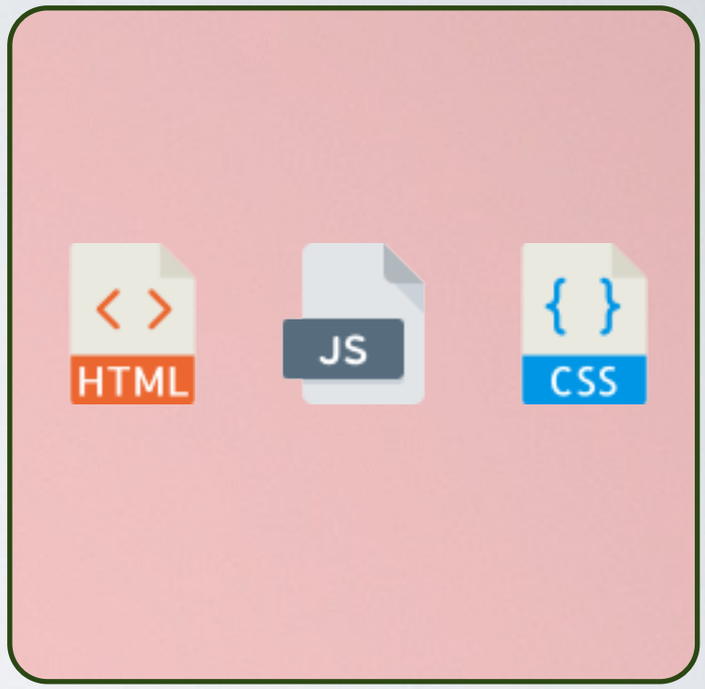


Frontend Server

✓ Cache the content on the browser and download if and only if that content has changed (based on a hash called *ETag*)

# Cache-Control

The backend tells the browser when to cache using the response header **`Cache-Control`**

- **`Cache-Control: no-store`**
  The content is not cached by the browser
  e.g. sensitive personalized data

- **`Cache-Control: no-cache`**
  The content is cached and the browser checks whether the server has a new content for a given hash called *ETag* (using **`If-None-Match`** header in request)
  e.g. HTML documents such as **`index.html`**

- **`Cache-Control: public, max-age=31536000, immutable`**
  The content is cached and the browser reused it without checking for an update with the server until **`max-age`** has expired
  e.g. Hashed JS/CSS/Media assets (see optimizing frontend code)