

## MAC - Message Authentication Code

Alice an Bob share a key k → HMAC - use a hash function on the message and the key  $MAC_k(m) = H(k \parallel m)$ 









## k MAC key












## MAC - Message Authentication Code

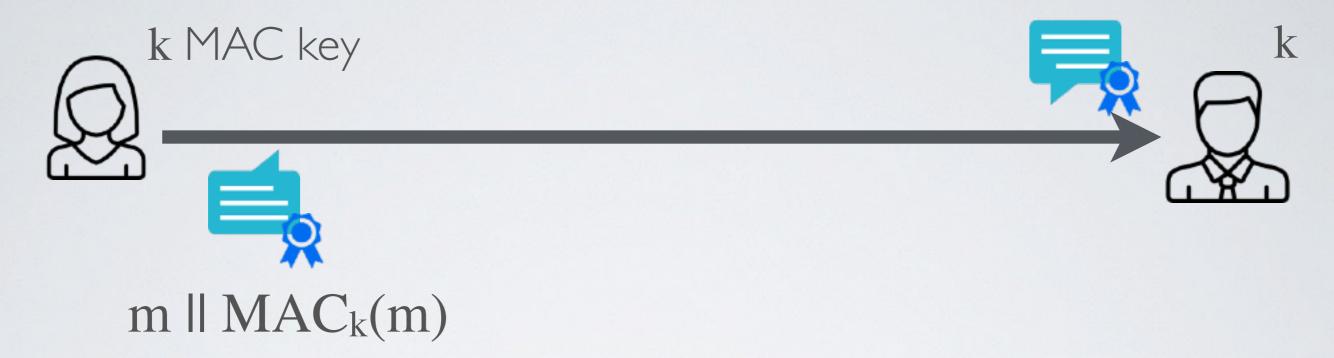

Alice an Bob share a key k

→ HMAC - use a hash function on the message and the key

$$MAC_k(m) = H(k \parallel m)$$

## Length Extension Attack

**Vulnerable**: All Merkle–Damgård-based hash functions so MD5, SHA-1 and SHA-2 (but not SHA-3)