The attacker is capable of …

confidentiality
integrity
availability



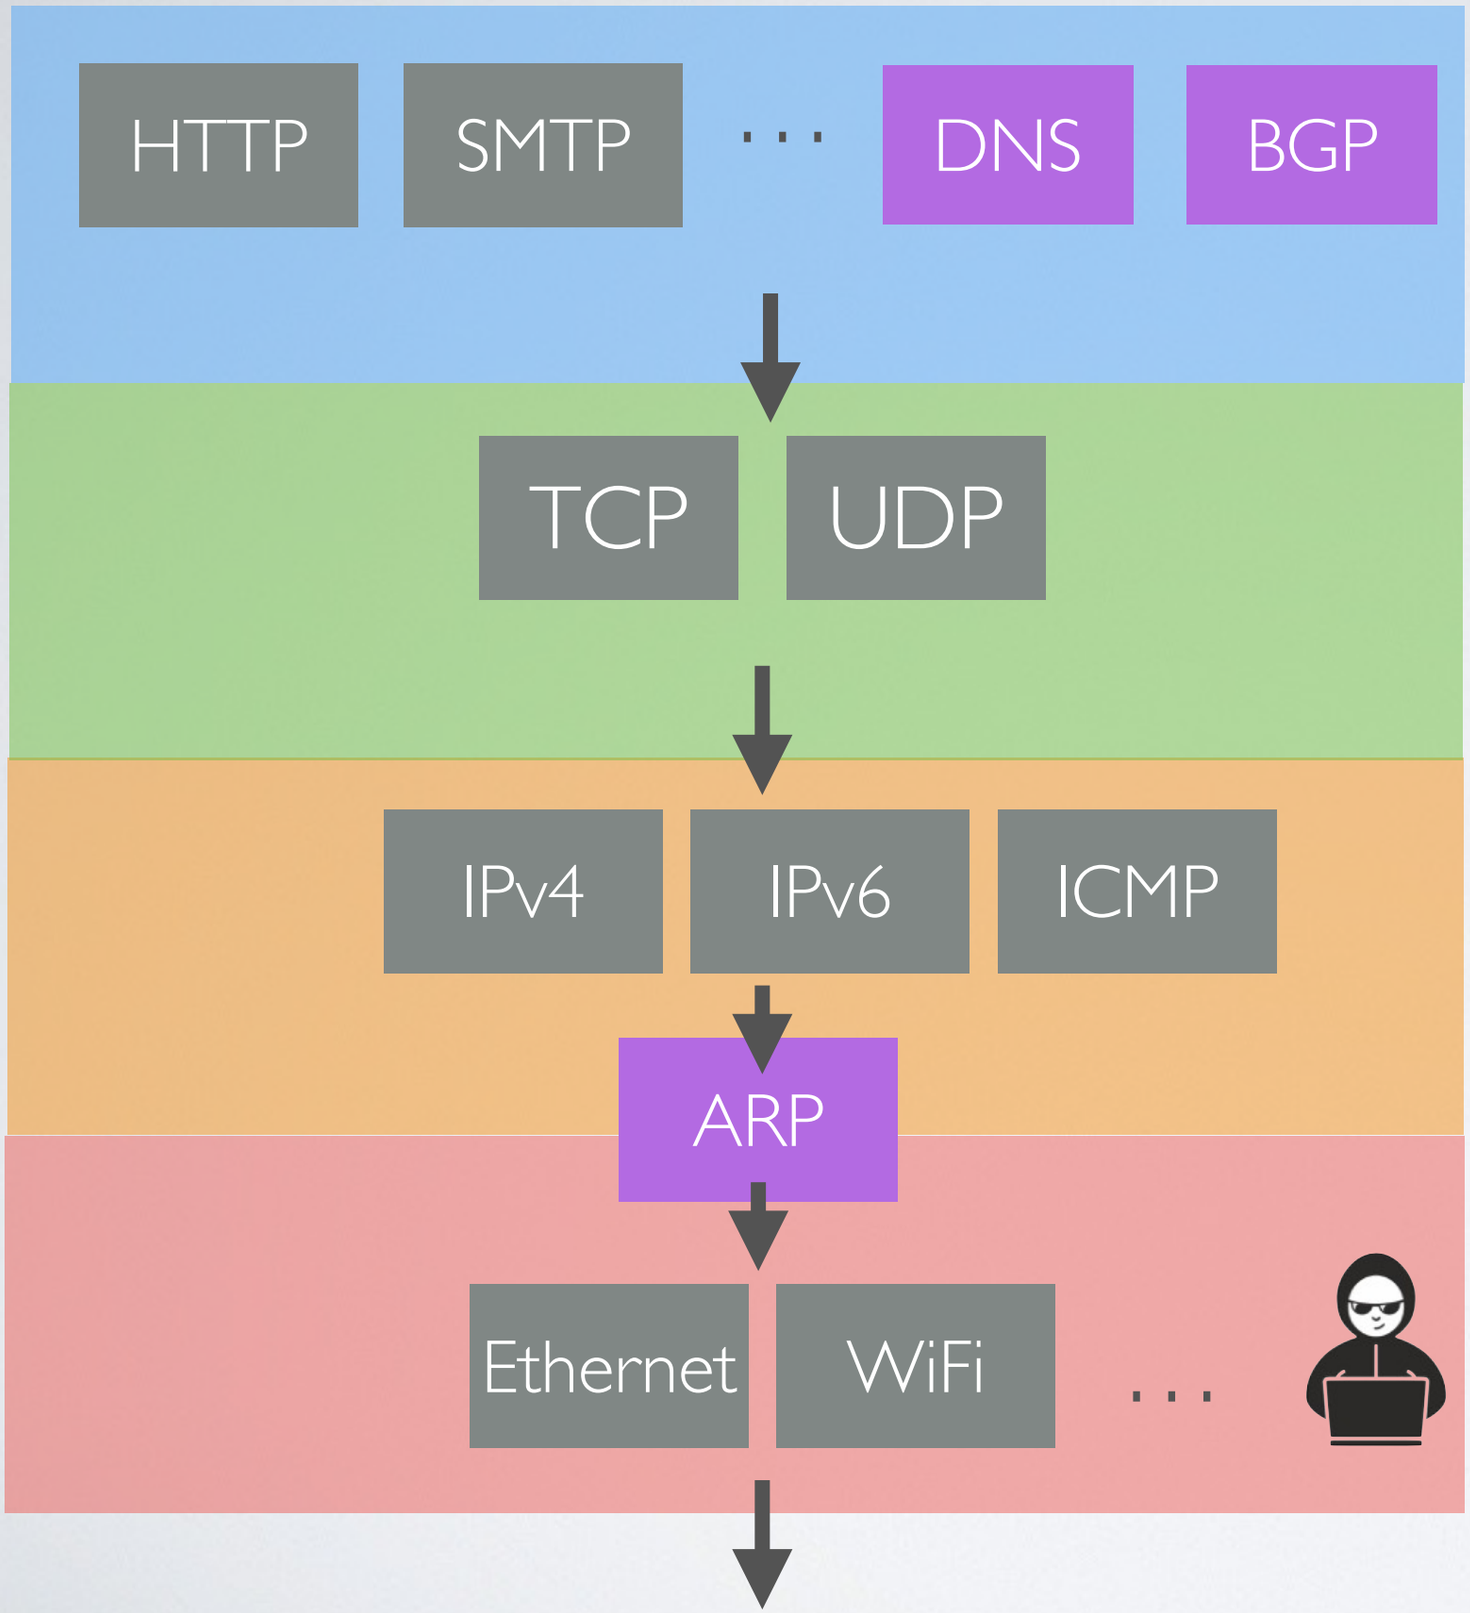
Scanning - survey the network and its hosts

Eavesdropping - read messages

Spoofing - forge illegitimate messages

DOS (Denial of Service) - disrupt the communications

➡ The attacker can target any layer in the network stack


HTTP
SMTP
. . .
DNS
BGP
TCP
UDP
IPv4
IPv6
ICMP
ARP
Ethernet
WiFi
. . .