


```
441 --QUERY A
442 SELECT SUM(FARE_AMOUNT)
443 FROM FactTicketSales
444 WHERE travel_date_key BETWEEN 20260301 AND 20260331;
445
446 --QUERY B
447 SELECT SUM(FARE_AMOUNT)
448 FROM FactTicketSales
449 WHERE passenger_key = 1;
450
```

Query 1: Query cost (relative to the batch): 100%
SELECT SUM([FARE_AMOUNT]) FROM [FactTicketSales] WHERE [travel_date_key]>=@1 AND [travel_date_key]<=@2

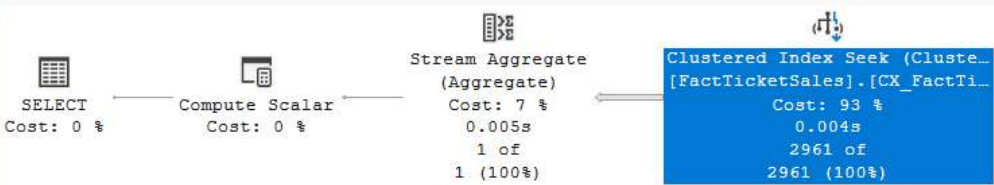

data_model...rakash (71))* X bg2uyr4t.sq...not connected*

```
441 --QUERY A
442 SELECT SUM(FARE_AMOUNT)
443 FROM FactTicketSales
444 WHERE travel_date_key BETWEEN 20260301 AND 20260331;
445
446 --QUERY B
447 SELECT SUM(FARE_AMOUNT)
448 FROM FactTicketSales
449 WHERE passenger_key = 1;
450
```

120 % 23 0 124 Ln: 450, Ch: 1 (84 chars, 4 lines) S

Results Messages Execution plan

Query 1: Query cost (relative to the batch): 100%

SELECT SUM([FARE_AMOUNT]) FROM [FactTicketSales] WHERE [passenger_key]=@1

Missing Index (Impact 98.8567): CREATE NONCLUSTERED INDEX [<Name of Missing Index, sysname,>] ON [dbo].[FactTicketSales] ([passenger_key])

