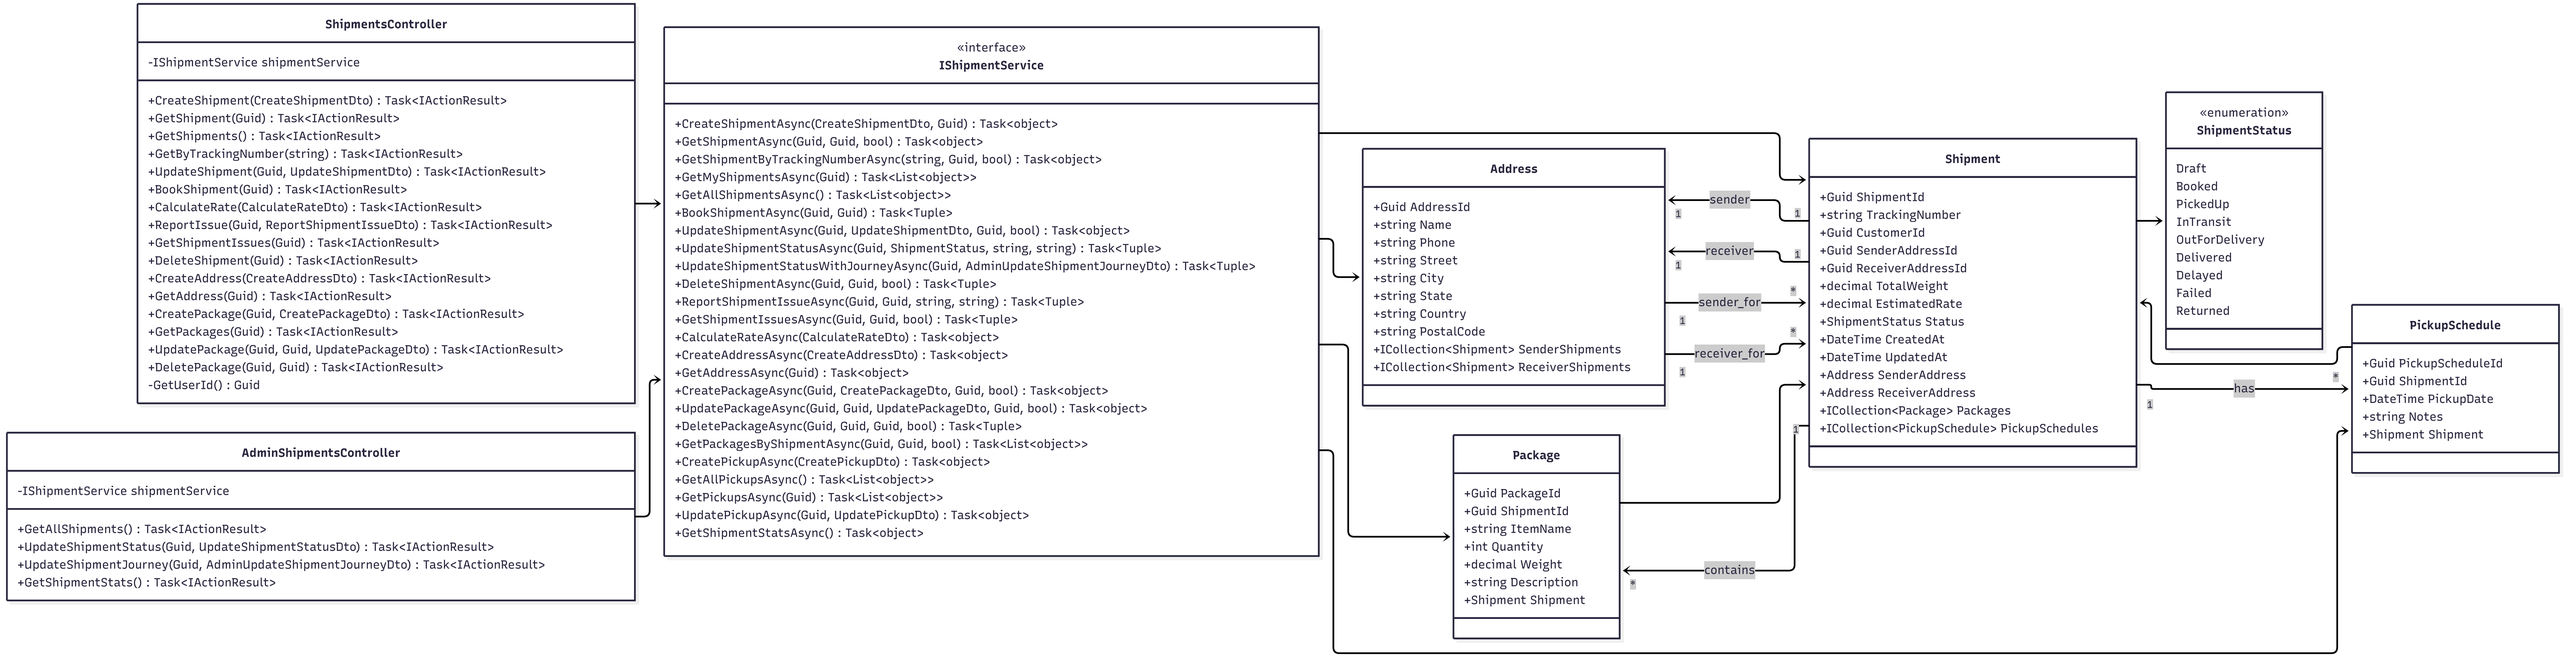
ShipmentsController
-IShipmentService shipmentService
+CreateShipment(CreateShipmentDto) : Task<IActionResult>
+GetShipment(Guid) : Task<IActionResult>
+GetShipments() : Task<IActionResult>
+GetByTrackingNumber(string) : Task<IActionResult>
+UpdateShipment(Guid, UpdateShipmentDto) : Task<IActionResult>
+BookShipment(Guid) : Task<IActionResult>
+CalculateRate(CalculateRateDto) : Task<IActionResult>
+ReportIssue(Guid, ReportShipmentIssueDto) : Task<IActionResult>
+GetShipmentIssues(Guid) : Task<IActionResult>
+DeleteShipment(Guid) : Task<IActionResult>
+CreateAddress(CreateAddressDto) : Task<IActionResult>
+GetAddress(Guid) : Task<IActionResult>
+CreatePackage(Guid, CreatePackageDto) : Task<IActionResult>
+GetPackages(Guid) : Task<IActionResult>
+UpdatePackage(Guid, Guid, UpdatePackageDto) : Task<IActionResult>
+DeletePackage(Guid, Guid) : Task<IActionResult>
-GetUserId() : Guid
AdminShipmentsController
-IShipmentService shipmentService
+GetAllShipments() : Task<IActionResult>
+UpdateShipmentStatus(Guid, UpdateShipmentStatusDto) : Task<IActionResult>
+UpdateShipmentJourney(Guid, AdminUpdateShipmentJourneyDto) : Task<IActionResult>
+GetShipmentStats() : Task<IActionResult>
«interface»
IShipmentService
+CreateShipmentAsync(CreateShipmentDto, Guid) : Task<object>
+GetShipmentAsync(Guid, Guid, bool) : Task<object>
+GetShipmentByTrackingNumberAsync(string, Guid, bool) : Task<object>
+GetMyShipmentsAsync(Guid) : Task<List<object>>
+GetAllShipmentsAsync() : Task<List<object>>
+BookShipmentAsync(Guid, Guid) : Task<Tuple>
+UpdateShipmentAsync(Guid, UpdateShipmentDto, Guid, bool) : Task<object>
+UpdateShipmentStatusAsync(Guid, ShipmentStatus, string, string) : Task<Tuple>
+UpdateShipmentStatusWithJourneyAsync(Guid, AdminUpdateShipmentJourneyDto) : Task<Tuple>
+DeleteShipmentAsync(Guid, Guid, bool) : Task<Tuple>
+ReportShipmentIssueAsync(Guid, Guid, string, string) : Task<Tuple>
+GetShipmentIssuesAsync(Guid, Guid, bool) : Task<Tuple>
+CalculateRateAsync(CalculateRateDto) : Task<object>
+CreateAddressAsync(CreateAddressDto) : Task<object>
+GetAddressAsync(Guid) : Task<object>
+CreatePackageAsync(Guid, CreatePackageDto, Guid, bool) : Task<object>
+UpdatePackageAsync(Guid, Guid, UpdatePackageDto, Guid, bool) : Task<object>
+DeletePackageAsync(Guid, Guid, Guid, bool) : Task<Tuple>
+GetPackagesByShipmentAsync(Guid, Guid, bool) : Task<List<object>>
+CreatePickupAsync(CreatePickupDto) : Task<object>
+GetAllPickupsAsync() : Task<List<object>>
+GetPickupsAsync(Guid) : Task<List<object>>
+UpdatePickupAsync(Guid, UpdatePickupDto) : Task<object>
+GetShipmentStatsAsync() : Task<object>
Address
+Guid AddressId
+string Name
+string Phone
+string Street
+string City
+string State
+string Country
+string PostalCode
+ICollection<Shipment> SenderShipments
+ICollection<Shipment> ReceiverShipments
sender
1
1
receiver
1
1
sender_for
1
*
receiver_for
1
*
Shipment
+Guid ShipmentId
+string TrackingNumber
+Guid CustomerId
+Guid SenderAddressId
+Guid ReceiverAddressId
+decimal TotalWeight
+decimal EstimatedRate
+ShipmentStatus Status
+DateTime CreatedAt
+DateTime UpdatedAt
+Address SenderAddress
+Address ReceiverAddress
+ICollection<Package> Packages
+ICollection<PickupSchedule> PickupSchedules
«enumeration»
ShipmentStatus
Draft
Booked
PickedUp
InTransit
OutForDelivery
Delivered
Delayed
Failed
Returned
has
1
*
PickupSchedule
+Guid PickupScheduleId
+Guid ShipmentId
+DateTime PickupDate
+string Notes
+Shipment Shipment
Package
+Guid PackageId
+Guid ShipmentId
+string ItemName
+int Quantity
+decimal Weight
+string Description
+Shipment Shipment
contains
1
*