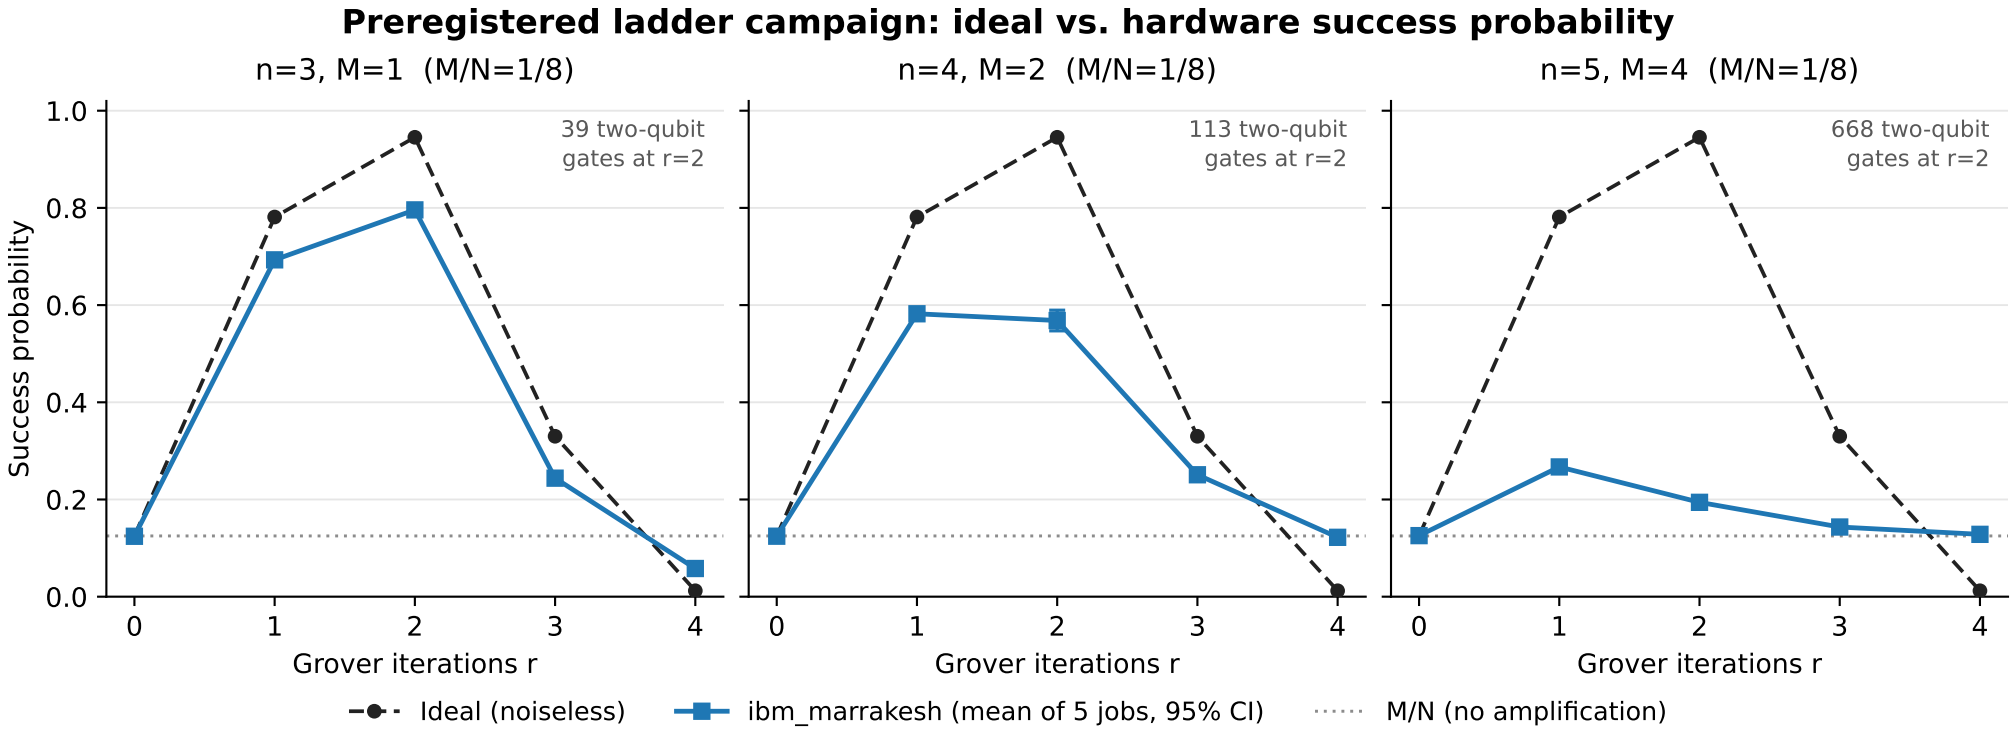
Preregistered ladder campaign: ideal vs. hardware success probability
n=3, M=1 (M/N=1/8)
n=4, M=2 (M/N=1/8)
n=5, M=4 (M/N=1/8)
39 two-qubit gates at r=2
113 two-qubit gates at r=2
668 two-qubit gates at r=2
Success probability
1.0
0.8
0.6
0.4
0.2
0.0
0
1
2
3
4
Grover iterations r
Ideal (noiseless)
ibm_marrakesh (mean of 5 jobs, 95% CI)
M/N (no amplification)