

1.




INVALID

foo	(T1, T1->bool, T3) -> T4	
a	T1->bool	
b	T1->bool	
c	T1->bool	
(1)		
(2)	T4	
(3)	bool	
(4)	T4	
(5)	T4	
(6)	T1 -> bool	
(7)	T1	
(8)	T1 -> T4	
(9)	T1	
(10)	T1->bool->T4	
(11)	T1->bool	

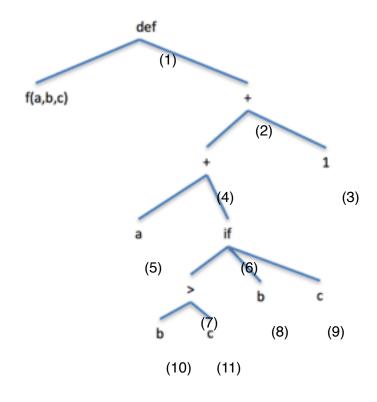

foo	(INT, INT, INT) -> INT	
а	INT	
b	INT	
С	INT	
(1)	INT	
(2)	INT	
(3)	INT	
(4)	INT	
(5)	INT	
(6)	INT	
(7)	bool	
(8)	INT	
(9)	INT	
(10)	INT	
(11)	INT	

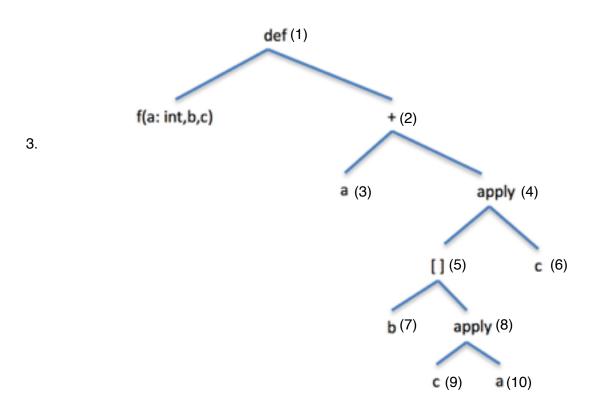

f	(int, Array of (int -> int) -> int, int -> int) ->int		
а	int		
b	Array of (int -> int) -> int		
С	int -> int		
(1)	int		
(2)	int		
(3)	int		
(4)	int		
(5)	(int -> int) -> int		
(6)	int -> int		
(7)	Array of (int -> int) -> int		
(8)	int		
(9)	int -> int		
(10)	int		