
THIRTYSOMETHING

DIY-NAS

About my DIY-NAS

ThirtySomething

14.07.2022

Contents

Contents	1
Change history	3
1 Initial situation	4
2 Search for alternatives	5
2.1 Use a mini PC in front of the NAS	5
2.2 Hardware alternatives	5
2.3 The planned hardware	5
2.4 The bought hardware	6
2.5 The difference	6
2.6 The consequences	7
3 The hardware build	8
4 The software installation	9
4.1 The operating system	9
4.2 The disks	9
4.3 The RAID storage	10
4.4 The file system	11
4.5 Shared folders	11
4.6 Users	12
4.7 CIFS shares	13
4.8 Tuning	14
4.8.1 SMB/CIFS	14
5 OMV plugins	15
5.1 ClamAV	15
5.2 MiniDLNA	17
5.3 OMV extras	18
5.4 Autoshutdown	19
5.5 PhotoPrism	22
6 Docker	24
6.1 Docker installation	24
6.2 Portainer	24
6.3 Container list	26
6.4 Pi-hole	26

6.5	SCM-Manager	26
6.6	Syncthing	28
6.7	Watchtower	29
6.8	MariaDB	30
6.9	phpMyAdmin	30
6.10	Mosquitto	31
6.11	Nextcloud	32
6.12	Monitoring	33
6.13	All-In-One	33
7	Ports	36
7.1	Ports by application	36
7.2	Ports by port number	36
A	svnExport.sh	38
List of Figures		I
List of Tables		II
Glossary		III

Change history

Version	Date	Description	Name
1.0.0	02.04.2022	<ul style="list-style-type: none"> Start with description 	ThirtySomething
1.0.1	16.04.2022	<ul style="list-style-type: none"> Rename section WOL to Autosutdown Fill section Autosutdown with content 	ThirtySomething
1.0.2	16.04.2022	<ul style="list-style-type: none"> Split file DIY-NAS-Content into separate files 	ThirtySomething
1.0.3	21.04.2022	<ul style="list-style-type: none"> Update to latest template version Add section about used ports Add svnExport.sh as appendix 	ThirtySomething
1.0.4	23.04.2022	<ul style="list-style-type: none"> Add documentation about Syncing docker container 	ThirtySomething
1.0.5	25.04.2022	<ul style="list-style-type: none"> Split section OMV plugins into files Add description of PhotoPrism 	ThirtySomething
1.0.6	28.04.2022	<ul style="list-style-type: none"> Add list of containers from old document 	ThirtySomething
1.0.7	30.04.2022	<ul style="list-style-type: none"> Use latest template version Add section about Pi-hole 	ThirtySomething
1.0.8	11.05.2022	<ul style="list-style-type: none"> Use latest template version Add copyright hint to the images 	ThirtySomething
1.0.9	19.05.2022	<ul style="list-style-type: none"> Add description of Watchtower 	ThirtySomething
1.0.10	21.05.2022	<ul style="list-style-type: none"> Add description of MariaDB and phpMyAdmin Switch SCM-Manager from manual to docker-compose.yaml Switch syncthing from manual to docker-compose.yaml Add description of Mosquitto 	ThirtySomething
1.0.11	26.05.2022	<ul style="list-style-type: none"> Add description of AIO docker compose file Add description of Gerbera 	ThirtySomething
1.0.12	27.05.2022	<ul style="list-style-type: none"> Remove description of Gerbera Add basic description of Nextcloud 	ThirtySomething
1.0.13	28.05.2022	<ul style="list-style-type: none"> Fix some minor errors Add links to components 	ThirtySomething
1.0.14	03.06.2022	<ul style="list-style-type: none"> Add section monitoring 	ThirtySomething
1.0.15	14.07.2022	<ul style="list-style-type: none"> Used correct image for SCM-Manager 	ThirtySomething

Table 1: Change history

1 Initial situation

In 2010 I bought my first [NAS](#). It was a [Synology DS411slim](#). The device is running up to now. For a few years now, it is only supplied with security updates. That is quite remarkable for the fact that it has already 12 years on the hump.

Now I've run out of space - I have 4*2TB running there in [RAID 10](#), which results in about 3.7TB. In addition, the performance is, well, not quite up to date.

2 Search for alternatives

2.1 Use a mini PC in front of the NAS

Realizing this situation I was searching for alternatives. The first idea was to use a [mini PC](#) in front of the [NAS](#). This failed for some reasons.

- Using the [NAS](#) directly for [Docker](#) volumes
- The CPU of the mini PC does not support [Intel VT](#)
- The network as bottleneck for [Docker](#) containers

2.2 Hardware alternatives

Then I decided to by a new [NAS](#) system. But which kind of [NAS](#) will it be? I've spent a long time to search the internet for possible soultions. I didn't know about the possibility to pimp a [TerraMaster NAS](#) with a different [OS](#). This is also possible for [Western Digital NAS](#) as described [here](#) and [here](#). Also the variant with a mini PC and separated storage case was interesting. The idea is to get the most out of money, so the ranking here is done by price/performance ratio and the DIY [NAS](#) wins the comparison.

1. DIY [NAS](#) system on PC base
2. DIY [NAS](#) system with separated storage case and mini PC
3. Commercial [NAS](#) system
4. Commercial [NAS](#) with custom OS

2.3 The planned hardware

When comparing the different hardware solutions, I also made a comparison between an Intel and an AMD based [NAS](#). The AMD variant won the price/power chapter, so I decided to buy:

- 32GB G.Skill RipJaws V black DDR4-3200 DIMM Dual Kit
- 250GB Samsung 970 Evo Plus M.2 2280
- 400 Watt be quiet! Pure Power 11 CM Modular 80+ Gold

- Black Fractal Design Node 304 cube without power supply
- 4x 4000GB WD Red Plus WD40EFZX 128MB 3.5"
- ASRock Fatal1ty B450 Gaming-ITX/AC AMD B450
- AMD Athlon 3000G with Radeon Vega Graphics 3.5GHz
- Noctua NH-L9a-AM4 topblow cooler

2.4 The bought hardware

„Life is what happens to you while you're busy making other plans.“

Figure 1: A quote from John Lennon

This means that the availability of chips and other events affect the market and make it difficult to realize these plans. For example, motherboards in mini-ITX format with AM4 socket have been really hard to get in the first half of 2022. That's why I revised my decision on the components:

- 32GB G.Skill RipJaws V black DDR4-3200 DIMM Dual Kit
- 250GB Samsung 970 Evo Plus M.2 2280
- 400 Watt be quiet! Pure Power 11 CM Modular 80+ Gold
- Black Fractal Design Node 304 cube without power supply
- 4x 4000GB WD Red Plus WD40EFZX 128MB 3.5"
- ASRock H610M-ITX/AC mITX Intel H610 DDR4 S1700
- Intel Core i3-12100 tray
- Noctua NH-L9i-17xx topblow cooler

2.5 The difference

The difference is that the CPU is a latest generation [Intel i3](#) processor. The corresponding [motherboard](#) is also brand new. Both were only launched in Q1/2022.

2.6 The consequences

The fresh introduction to the market has some consequences: [OMV 5](#) does not support the network chip of the motherboard. So I decided to install the [OMV 6 beta](#) on my DIY NAS. I also tried [TrueNAS](#) – it looks much more professional than [OMV](#), but it is also a bit more complicated to understand and configure. It also doesn't have native support for [Docker](#).

3 The hardware build

Although I build up my last PC more than 25 years ago assembling the hardware was a breeze. The only surprise was the mounting position of the power supply. As I understand how to do this everything was fine.

4 The software installation

4.1 The operating system

The basic installation of [OMV](#) works without any problems. This is known from debian. Additional [Volker Theile](#), the founder of the [OMV](#) project, and his team have done a very good job. Thank you guys!

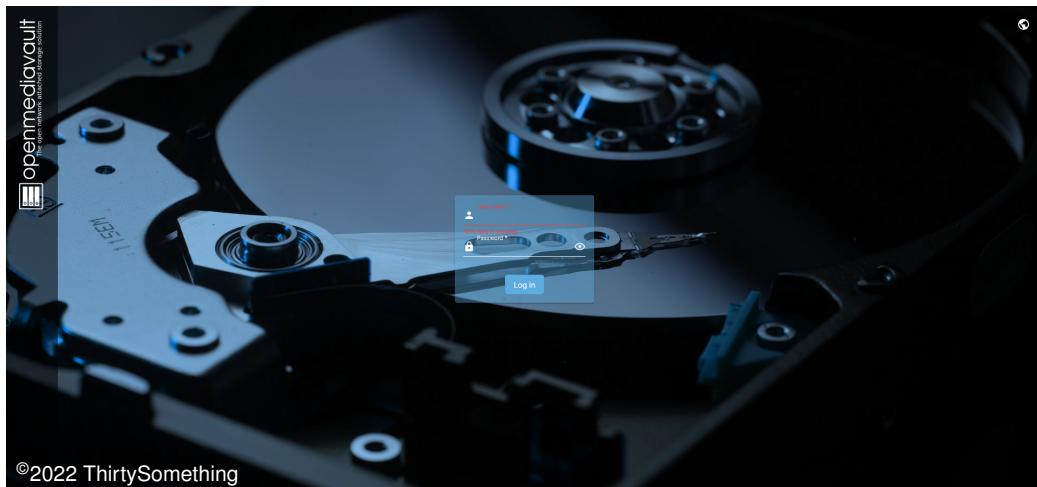


Figure 2: The OMV login page

4.2 The disks

All attached disks are working. The system disk is a NVME SSD with a 250 GB capacity. All others are 4 TB WD RED disks.

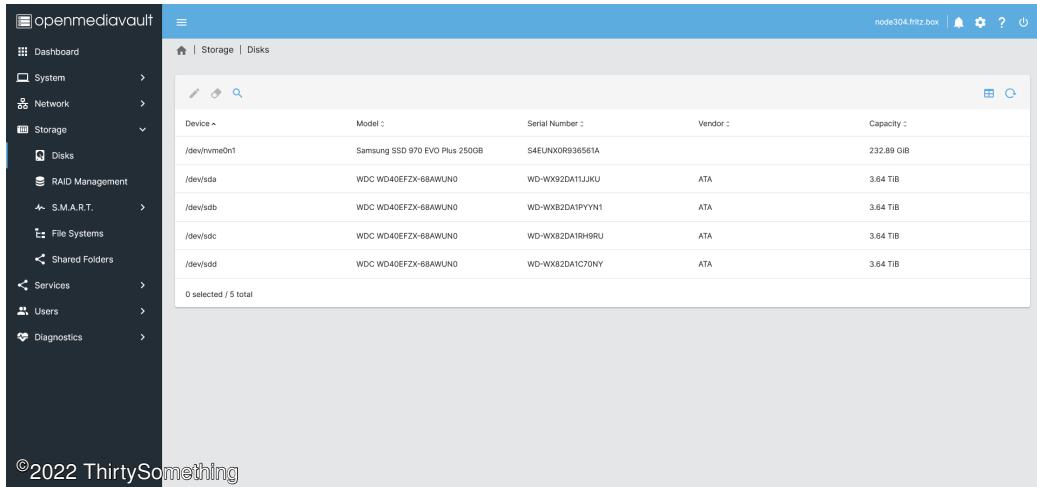


Figure 3: The OMV disks

4.3 The RAID storage

Configuring the [RAID](#) was also less problematic. But there is an important point: As long as the RAID system is created, do not use the RAID! During the RAID build I was playing around with [OMV plugins](#) to see the diskstats – and damaged the RAID build. After a reboot the system hangs on the filesystem check. I was shocked - also about the large amount of blocks the fsck found and tried to repair. It took a while to understand what happens. Then I've startet from scratch and everything was okay. The creation of the file system at the end went without problems. A filesystem check found nothing to do.

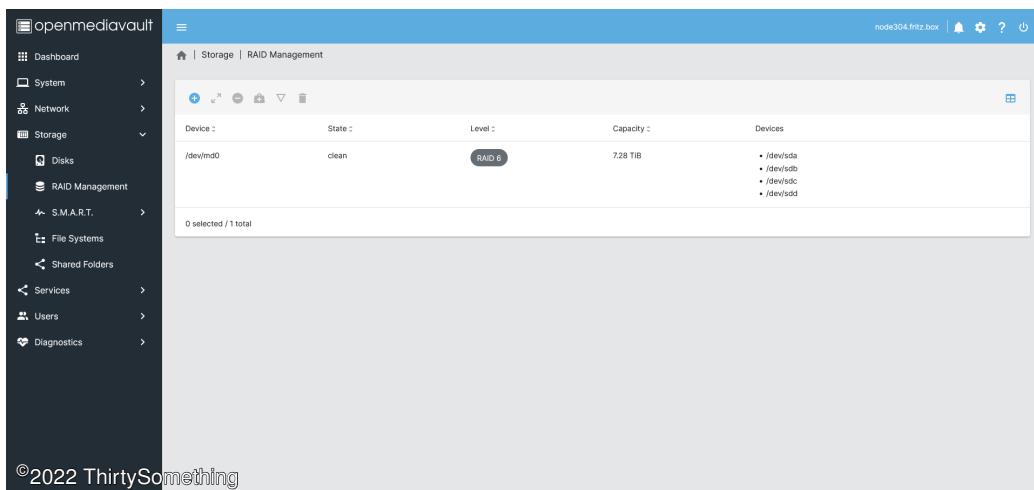


Figure 4: The OMV RAID

4.4 The file system

This was a simple step – just create a filesystem on the previously created RAID volume.

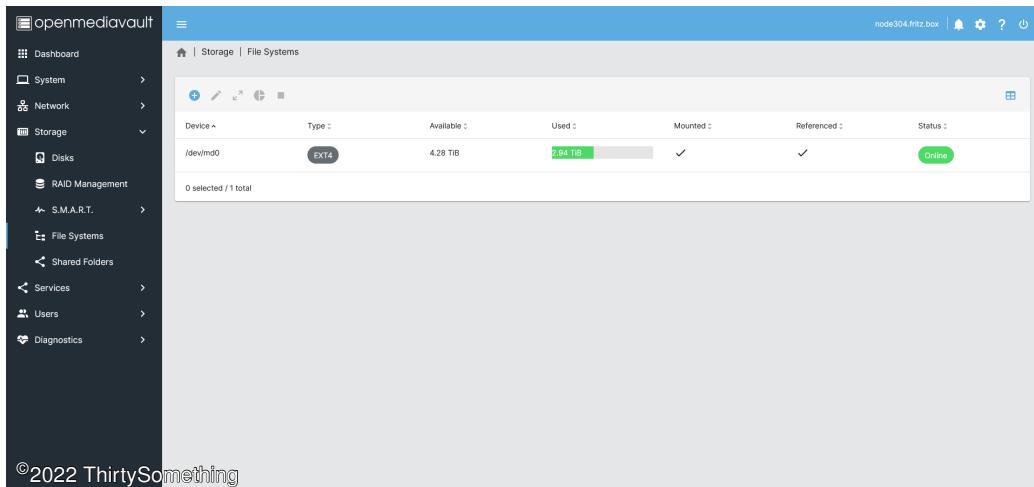


Figure 5: The OMV filesystem on the RAID

4.5 Shared folders

Some common folders should be defined before anything else is done:

- The folder `docker` for the use of [Docker](#).

- The folder `homes` as base folder for the users home directories.
- The folder `music` for the miniDLNA plugin.
- The folder `quarantine` for the use of [ClamAV](#).
- The folder `video` also for the miniDLNA plugin.

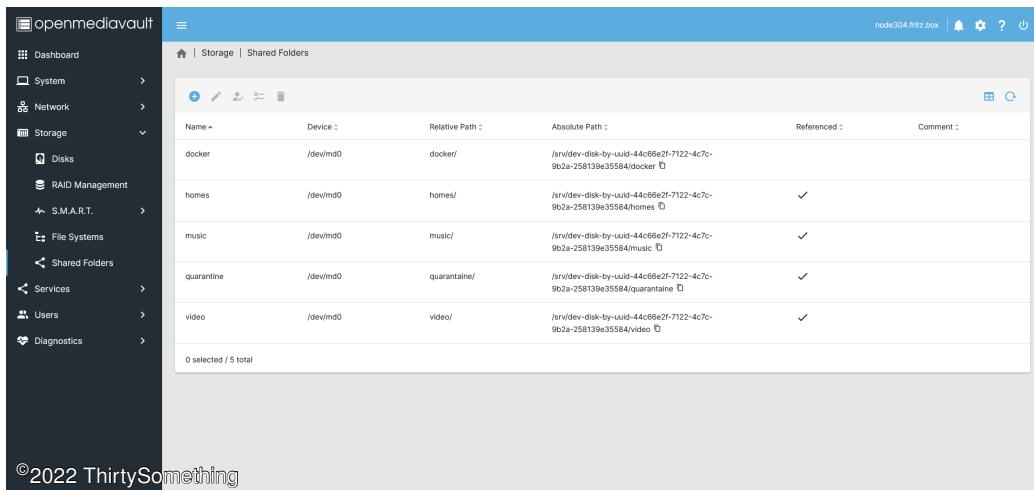


Figure 6: The OMV shared folders

This „shared folders“ are defined as container to be used inside of [OMV](#). To make them accessible from the network you have to enable services for them.

4.6 Users

In the settings the option `User home directory` is enabled and points to the previously created `homes` folder. Then I created the users.

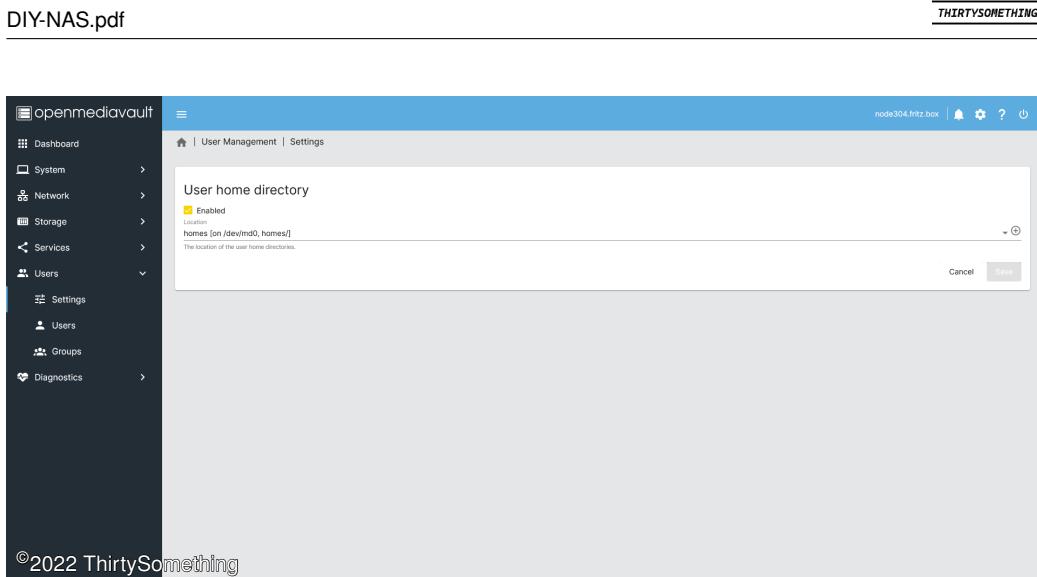


Figure 7: The OMV users home directory

4.7 CIFS shares

Simple - enable the SMB/CIFS service, enable the home directories and then create shares for the previously defined shared folders. Allow read/write access for the administrator of the shares (me), the others got read access to them.

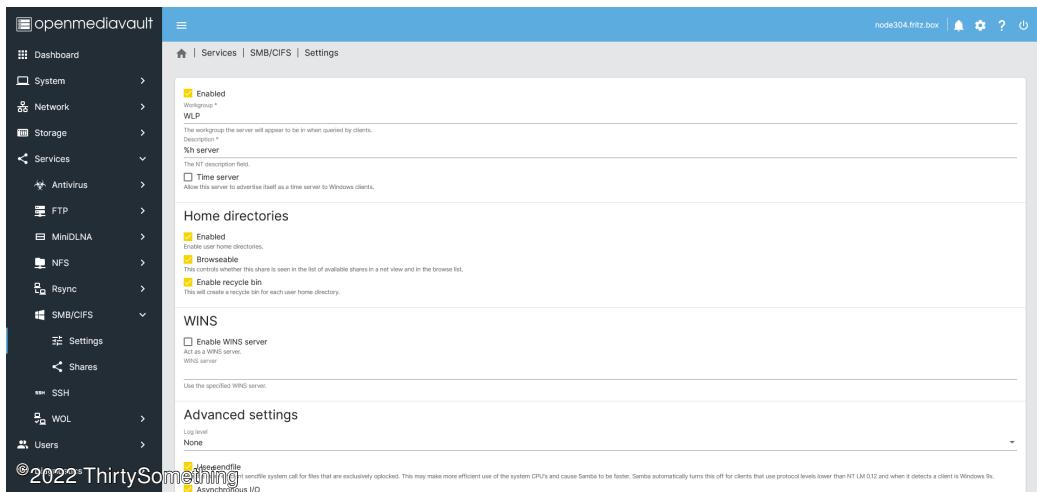


Figure 8: The OMV CIFS settings

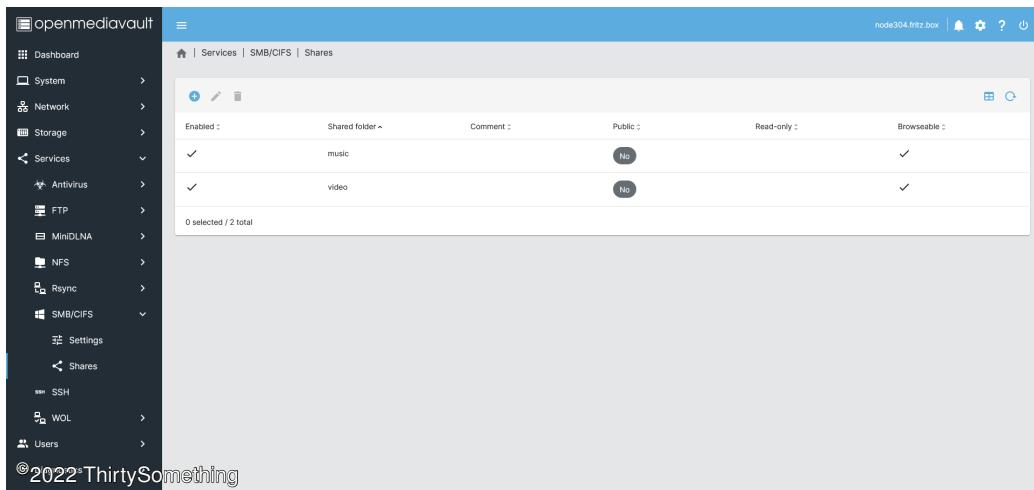


Figure 9: The OMV CIFS shares

As you can see there is actually no public access to these shares. This means that only privileged users can access them.

4.8 Tuning

4.8.1 SMB/CIFS

Transferring data from the old [NAS](#) to the new one takes a lot of time. To speed up the process I searched for some tuning and found this [here](#):

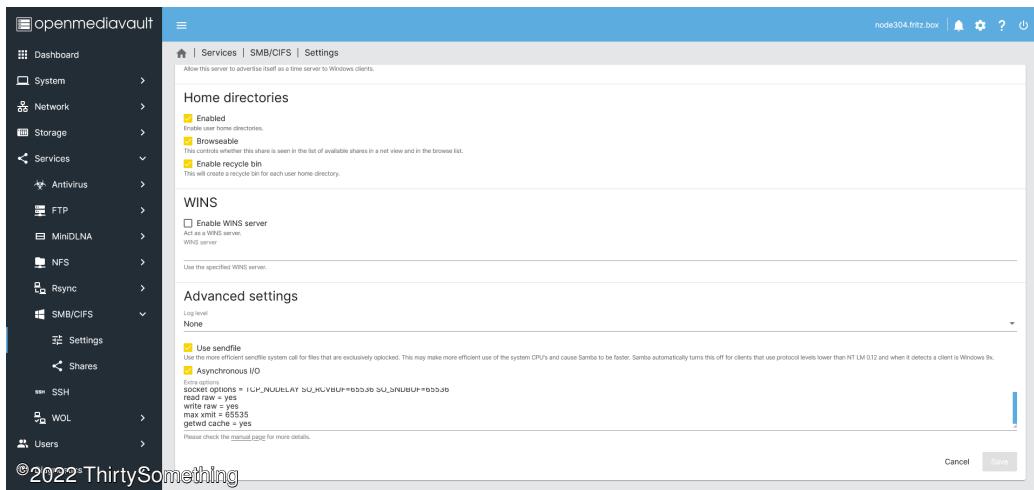


Figure 10: The OMV advanced CIFS settings

5 OMV plugins

5.1 ClamAV

To protect the data I want to use an antivirus program. As open source solution there is [ClamAV](#) available – and also as plugin for [OMV](#).

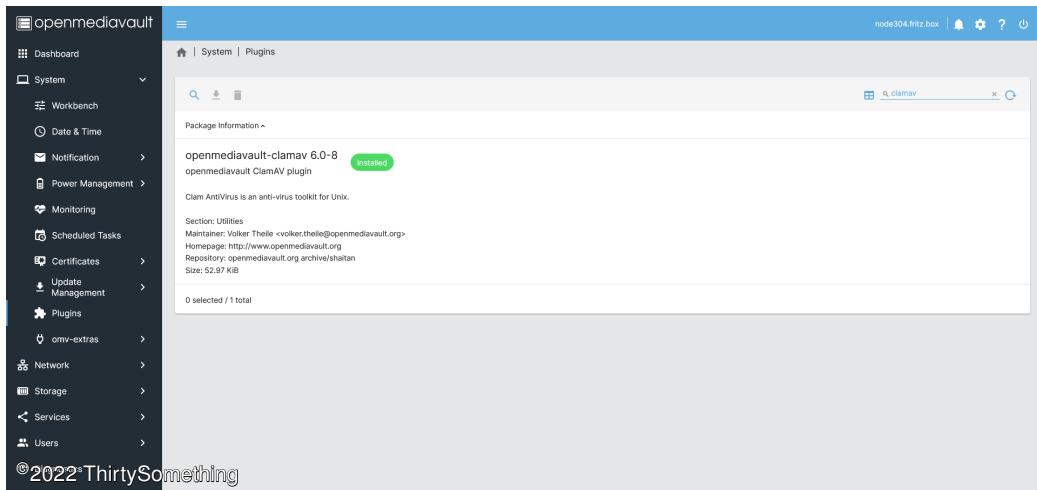


Figure 11: The OMV ClamAV plugin

In the setup we use the previously defined quarantine folder.

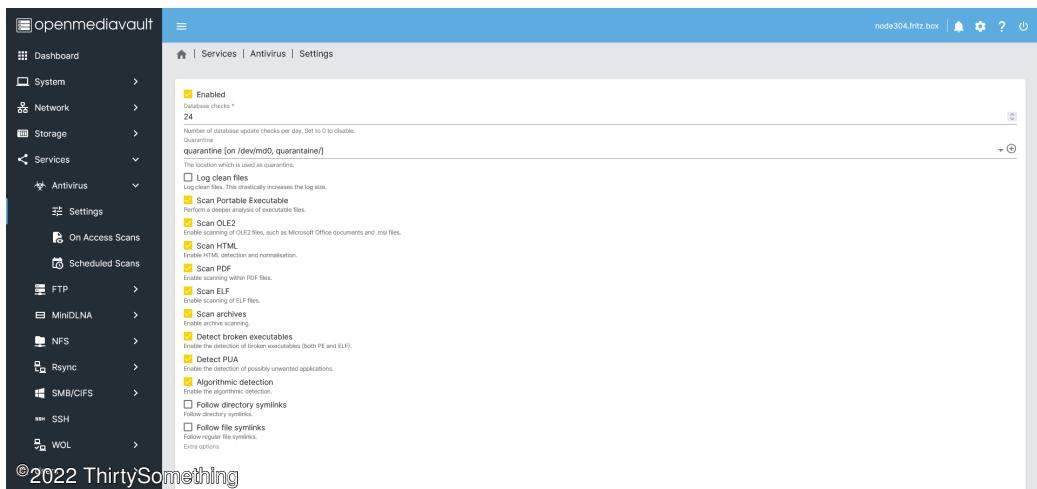
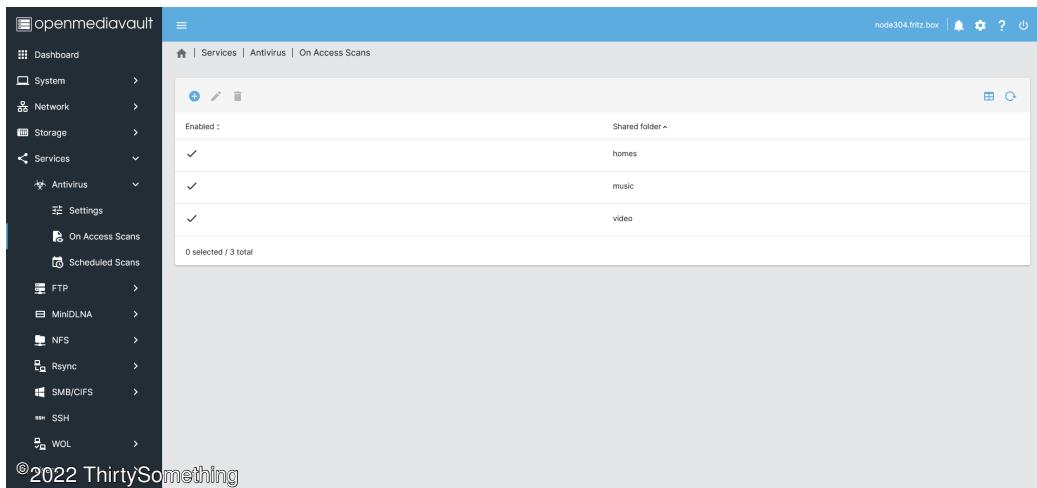
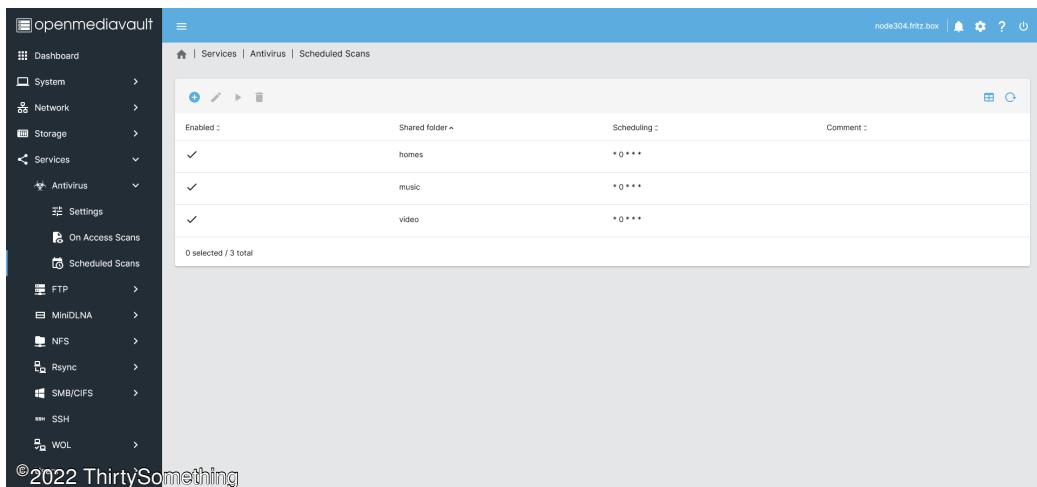


Figure 12: The antivirus settings

I enabled a scan on access for specific folders.

**Figure 13:** The antivirus on access scan

Also I've enabled a scheduled scan for these folders, too.

**Figure 14:** The antivirus scheduled scan

Maybe somebody will claim that all scheduled scans run on the same time. Yes – this was setup to check the power of the CPU. The system load increases to a load of about 3 – that's fantastic from my point of view! This means that there are more than enough reserves. When I'm spreading the schedule I can lower the load.

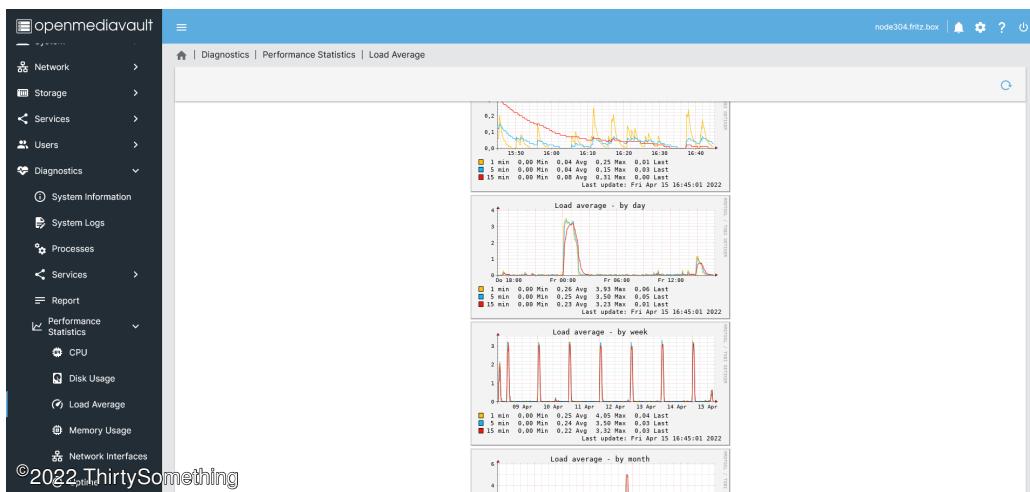


Figure 15: The antivirus system load on scan

5.2 MiniDLNA

To stream music and videos from the [NAS](#) to the network I'm using the [ReadyMedia](#) media server software. In [OMV](#) this is used with the old name [Minidlna](#).

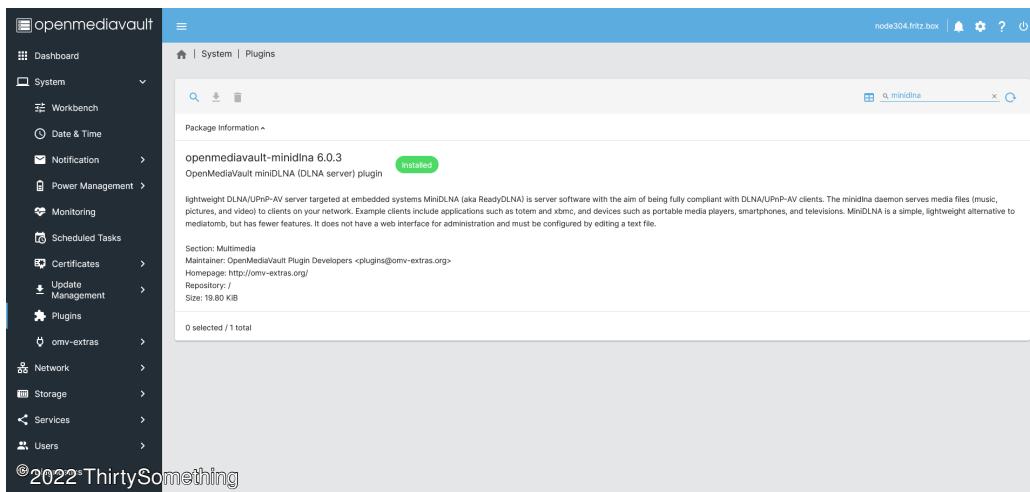


Figure 16: The MiniDLNA plugin

The basic setup is simple - I've checked the [Enable](#) box and that's it.

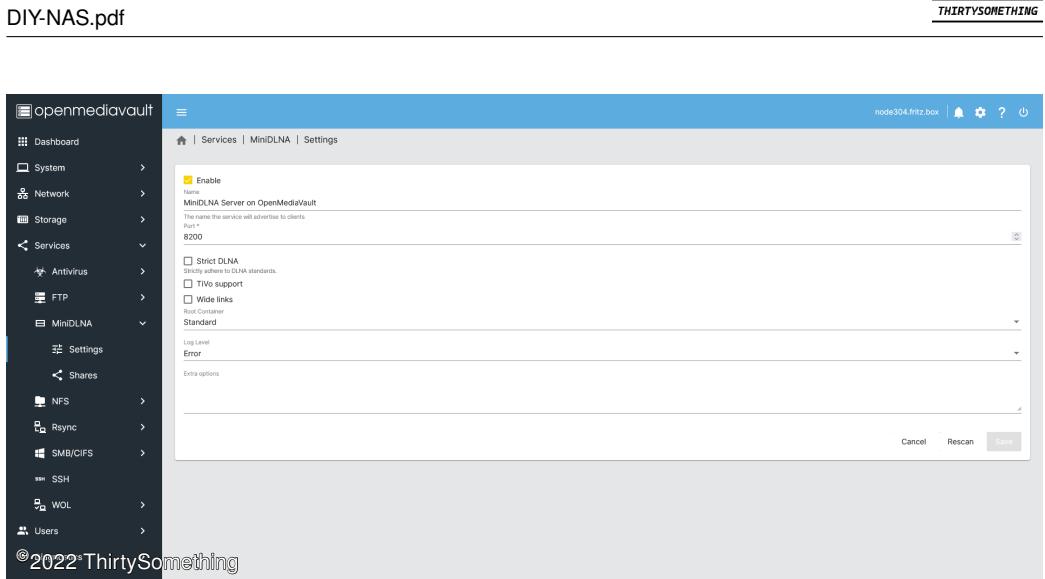


Figure 17: The MiniDLNA settings

Then I have to define the shares and the kind of content of the shares.

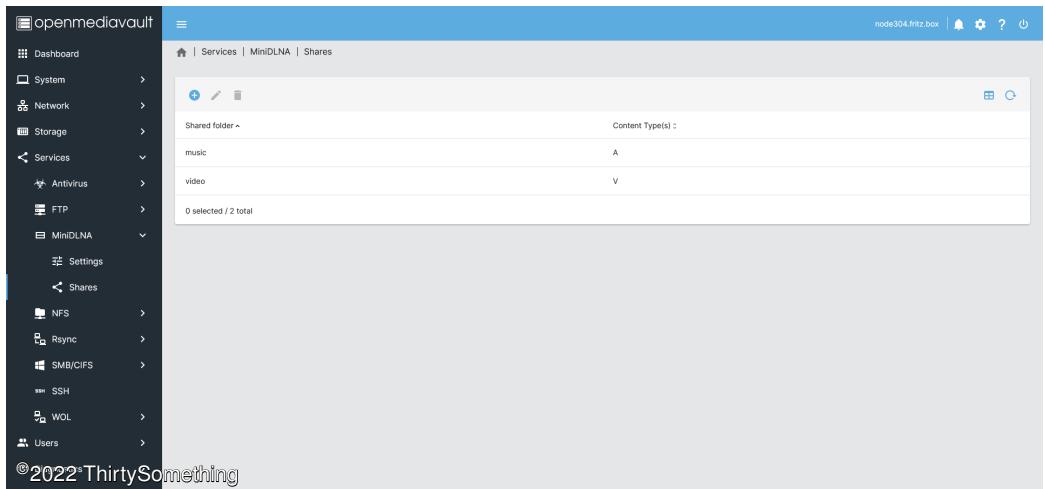


Figure 18: The MiniDLNA shares

Note to myself: The logfile of this software bloated twice all available space on the OS drive. Search for an alternative for this!

5.3 OMV extras

The **OMV extras** are not available in the plugin list. The way to go to install them is described [here](#). Login as user `root` using SSH and enter the following command:

```
sudo su -
wget -O - https://github.com/OpenMediaVault-Plugin-Developers/packages/raw/master/install | bash
```

Figure 19: The OMV extras installation

Using this plugin enables the [Docker](#) and [Portainer](#) installation to enhance the capabilities of the [NAS](#).

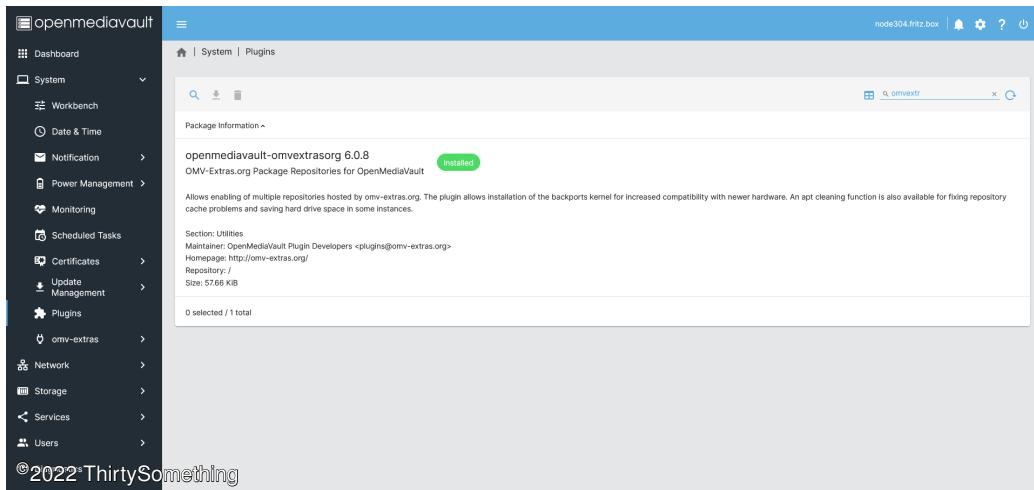


Figure 20: The OMV extras plugin

5.4 Autoshutdown

To save some energy we want the system to shutdown when not used and to wake up when used. So we want to use the autoshutdown plugin and the [WOL](#) feature. **NOTE:** Don't forget to enable [WOL](#) in the BIOS. For my system there have been two settings, one setting on the adapter itself and one setting in the boot options.

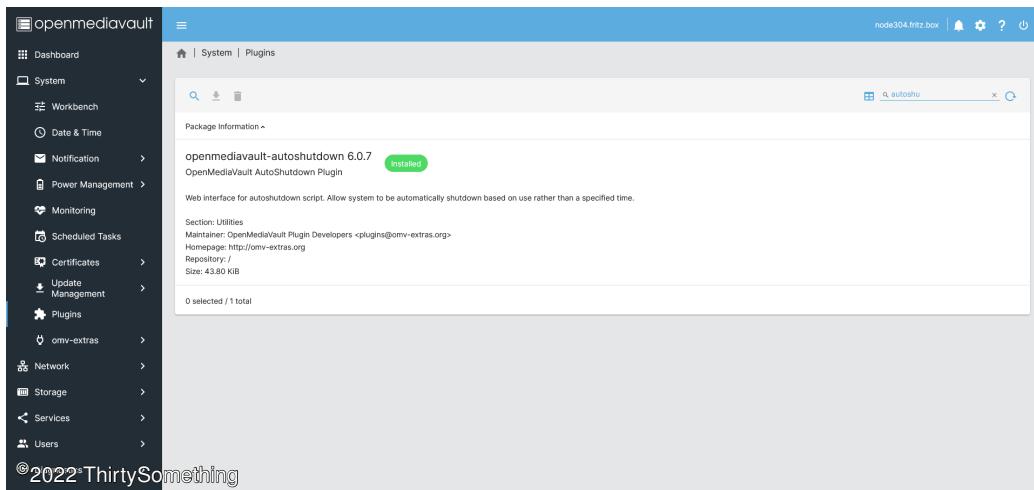


Figure 21: The OMV autoshutdown plugin

As first step we have to enable the **WOL** on the network card. You can find the checkbox as last option of the Advanced settings section.

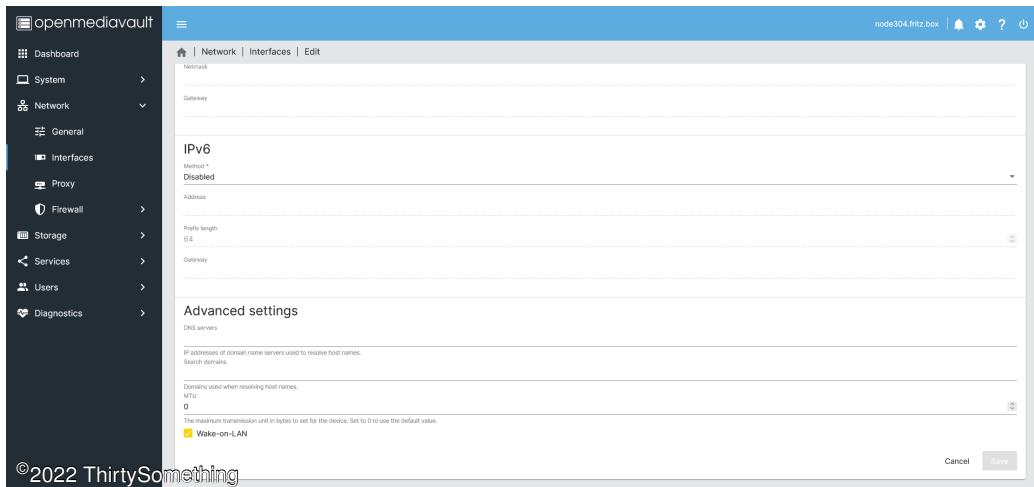


Figure 22: The OMV network card setup

Then we have to configure/setup the autoshutdown plugin. First step is to enable the autoshutdown. Second step is to force an uptime between 23:30 and 02:00 to ensure backup is done. The rest is left with default settings and might be updated at a later point.

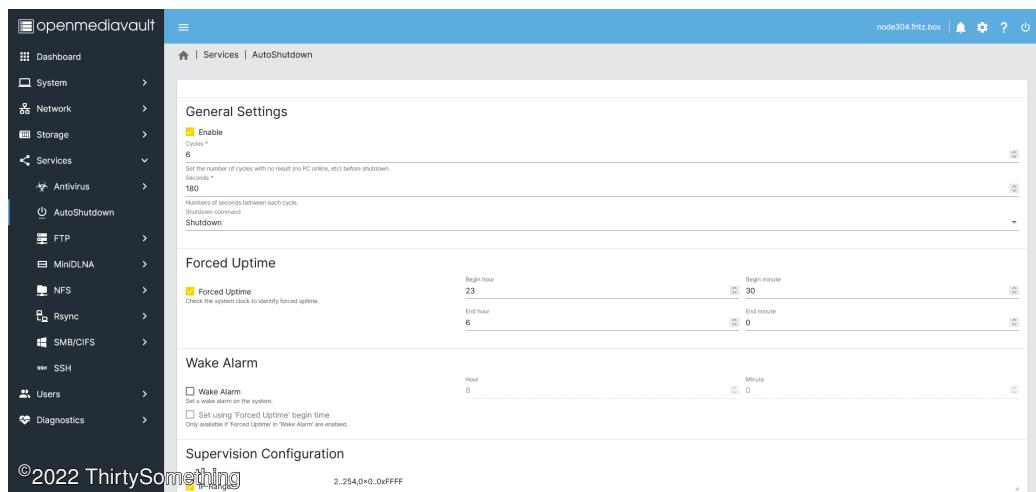


Figure 23: The autoshutdown setup 1

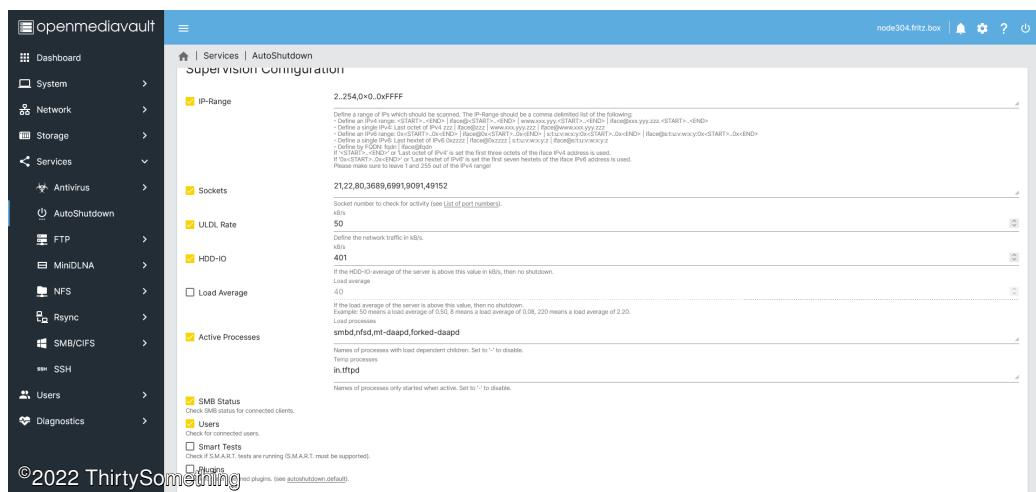


Figure 24: The autoshutdown setup 2

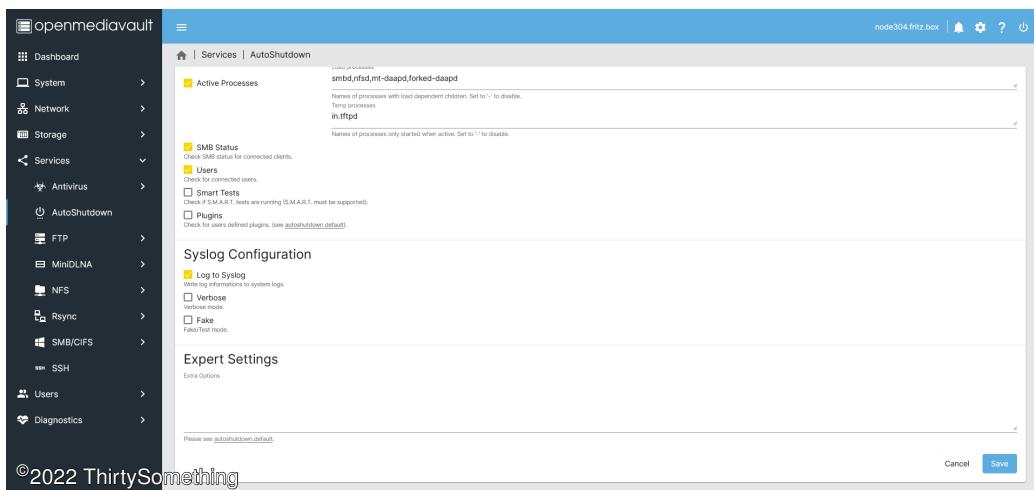


Figure 25: The autoshutdown setup 3

5.5 PhotoPrism

I used the app [PhotoPrism](#) to de-duplicate my images. The last 15 years a lot of duplicates blewed up the collection. Let's start with the first step, the installation of the plugin.

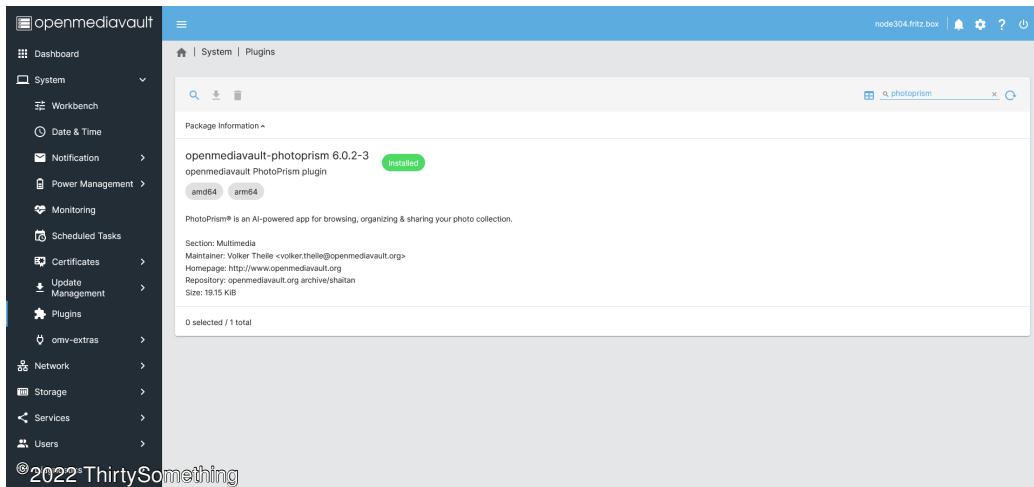


Figure 26: The OMV PhotoPrism plugin

The next step has been the creation of the following shared folders:

- `photoprism` – The location for the image database.
- `photoprism_import` – The share used for image import.

- photos – The final location of the photos in an organized way.

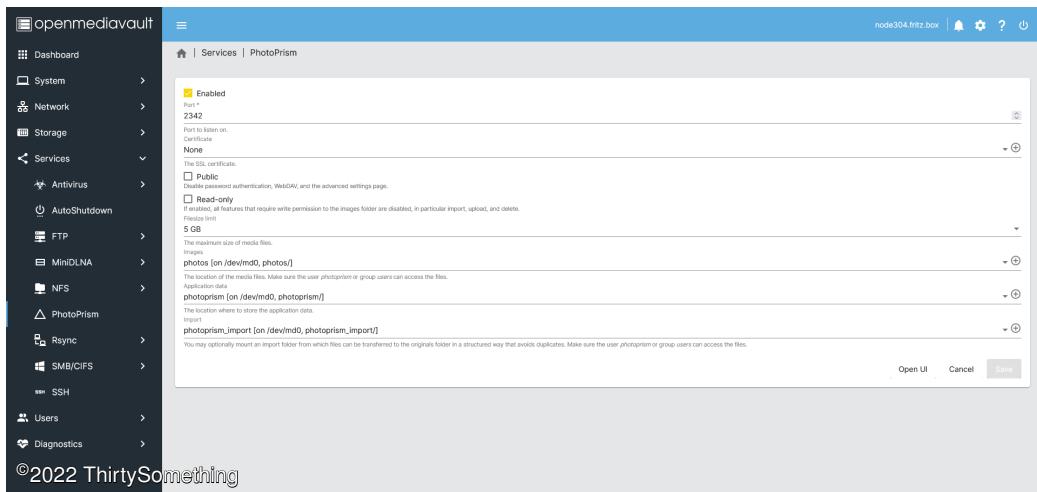


Figure 27: The OMV PhotoPrism setup

The setup is easy, just set the shares – that's all folks. Okay – I remember some images I made with a digital SLR camera. They are large as I remember, so I've increased the filesize limit to 5 GB.



Figure 28: The PhotoPrism login

6 Docker

By using [Docker](#) I want to enhance the [NAS](#) with features which are not available out-of-the-box. Especially with services my previous [NAS](#) offers and which are not native available for [OMV](#).

6.1 Docker installation

The default location of [Docker](#) is `/var/lib/docker` on the system disk. Although the system disk is a fast SSD, I want to install [Docker](#) on the slower RAID storage. So I have to change the path of [Docker](#) storage.

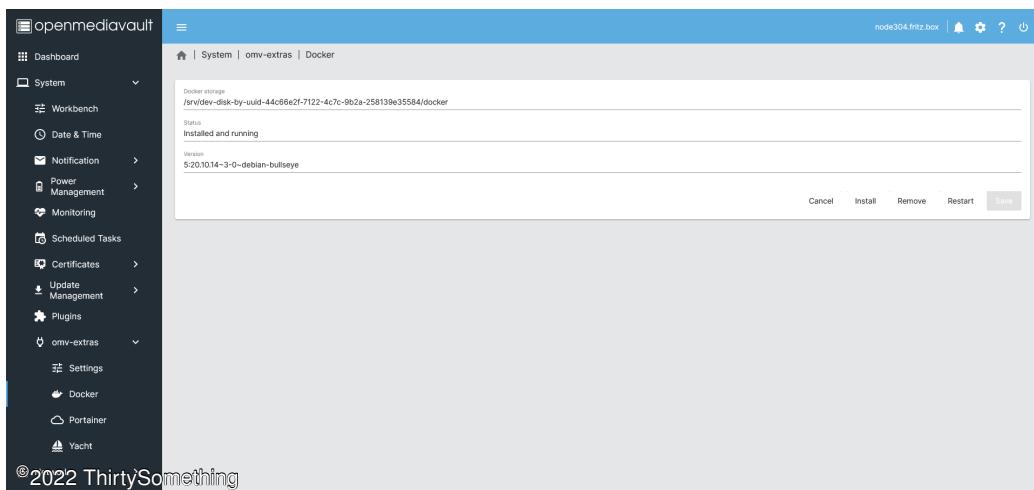


Figure 29: The Docker setup

In case [Docker](#) is already installed, see [here](#) how to move the [Docker](#) storage to another location.

6.2 Portainer

To have more comfort in dealing with [Docker](#) we install also [Portainer](#) from the [OMV extras](#).

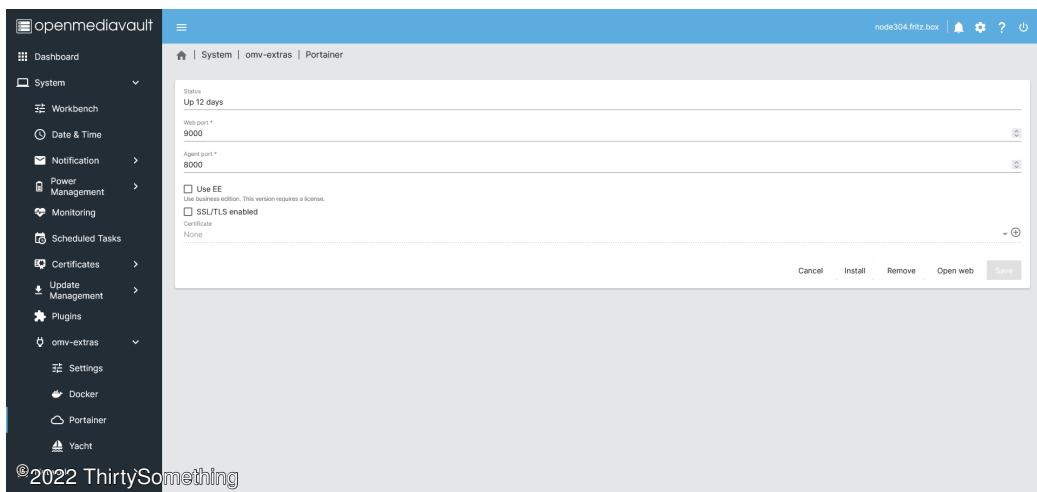


Figure 30: The Portainer setup

After installation [Portainer](#) is up and running.

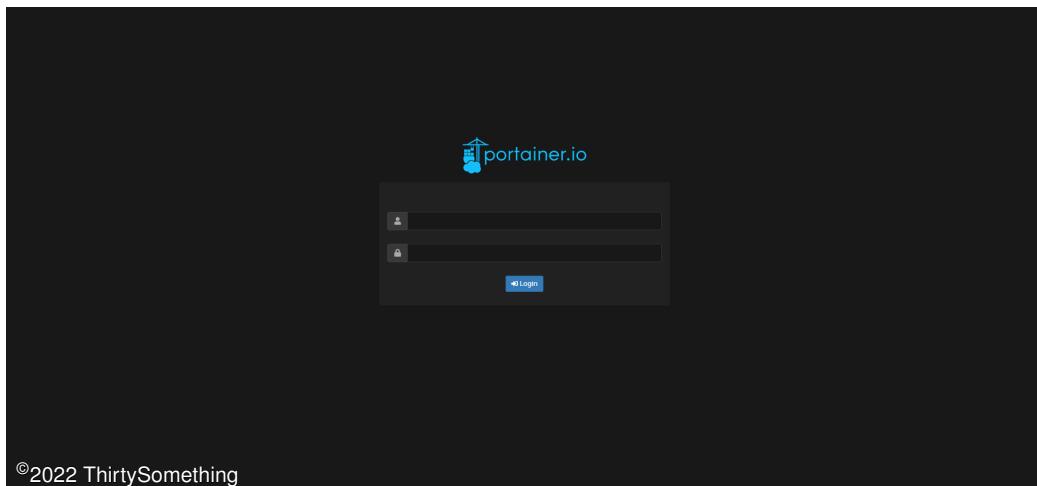


Figure 31: The Portainer login

6.3 Container list

- [Portainer](#) — UI for docker – done with docker installation.
- [SCM-Manager](#) — SCM with git, svn and hg – done.
- [MariaDB](#) — Database for various projects – done.
- [phpMyAdmin](#) — UI for the database – done.
- [Mosquitto](#) — A MQTT broker – done.
- [Syncthing](#) — File synchronization – done.
- [Nextcloud](#) — Private cloud service – done.
- Backup server?
 - [restic](#)
 - [Duplicati](#)
- [MinIO](#) — As data sink for [Nextcloud](#), [restic](#) or [Duplicati](#)
- [Pi-hole](#) — Adblocker for the network – won't do that, see section [6.4](#) for explanation
- [gotify](#) — Notification server

Figure 32: Containerlist

6.4 Pi-hole

I'm already using [Pi-hole](#) on a old [Raspberry Pi 2B](#) and I'm very pleased with that software. Because of it's nature working as a [DNS resolver](#) I won't move this to the NAS. The reason is quite simple – this will influence the [Autoshutdown](#) plugin and/or will make it obsolete. This is not what I want to achieve.

6.5 SCM-Manager

[SCM-Manager](#) provides a comfortable user interface for [git](#), [Mercurial](#) and [Subversion](#). Up to now I use [Subversion](#) for [version control](#). Some of my

repositories are private and I will never publish them to a public hoster like [GitHub](#) although they offer private repositories. All my other repositories are hosted on my [NAS](#) – the plan is to move them to [git](#) if possible – just to have them on a more modern version control system.

The docker-compose.yaml for [SCM-Manager](#) looks like:

```
version: "3.8"
services:
  scmmanager:
    container_name: scmmanager
    image: scmmanager/scm-manager:latest
    ports:
      - 2222:2222
      - 8080:8080
    restart: unless-stopped
    volumes:
      - scm-config:/var/cache/scm/work
      - scm-data:/var/lib/scm
volumes:
  scm-config:
  scm-data:
```

The startup of the container should work without any problems. For the setup of [SCM-Manager](#) see the [documentation](#).

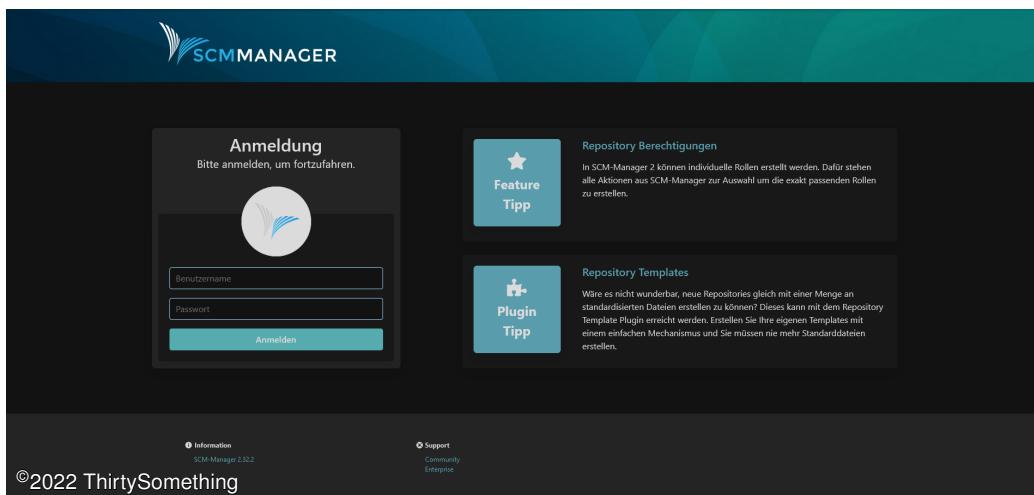


Figure 33: The SCM-Manager login

After importing my repositories, I've setup a backup job. For this I've updated my script [svnExport.sh](#) that it will work for [SCM-Manager](#). Setting up a cronjob inside a [Docker](#) container is a [pita](#). The previously created volume is required to dynamically export all existing [Subversion](#) repositories. The command will be something like this one:

```
/bin/bash /srv/<omv-raid>/<path-to-script>/svnExport.sh >>
/srv/<omv-raid>/<path-to-script>/svnExport.log 2>&1 &
```

Figure 34: Cron command for svnExport

For the script please see appendix [A](#).

The job is then setup in [OMV](#) scheduled tasks accessing the script. **NOTE:** The path to the [SCM-Manager](#) repositories needs to be set inside in the script.

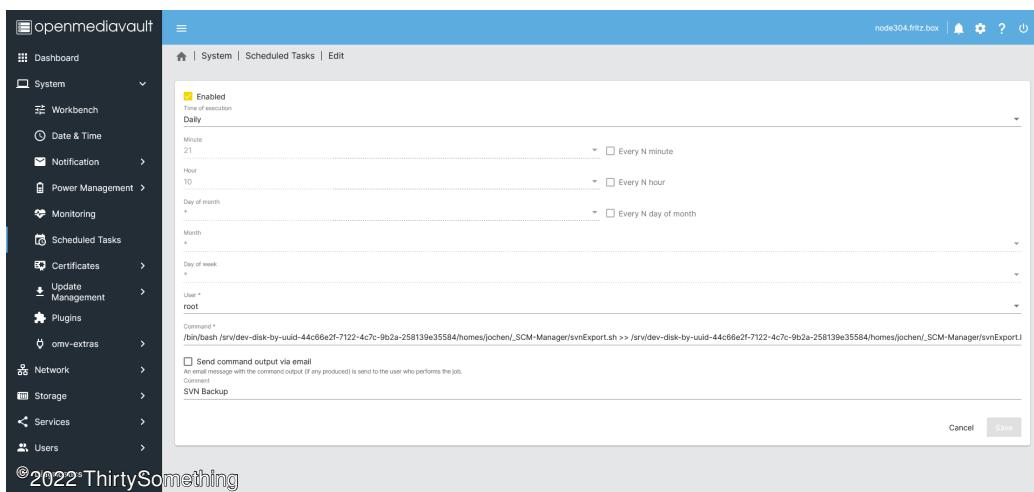


Figure 35: The SCM-Manager backup task

6.6 Syncthing

[Syncthing](#) is a file synchronization service. I use this to backup automatically data from my smartphone to the PC and then from the PC to the NAS. The setup is easy regarding the [Docker README](#) of the project. The docker-compose.yaml for [Syncthing](#) looks like:

```
version: "3.8"
services:
  syncthing:
    container_name: syncthing
    environment:
      - PUID=1000
      - GUID=1000
    image: syncthing/syncthing:latest
    ports:
      - 8384:8384
      - 21027:21027/udp
      - 22000:22000/tcp
      - 22000:22000/udp
```

```

restart: unless-stopped
volumes:
- syncthing-data:/var/syncthing
volumes:
syncthing-data:

```

Setting up the synchronized folders is as usual with [Syncthing](#). The result may look like this one.

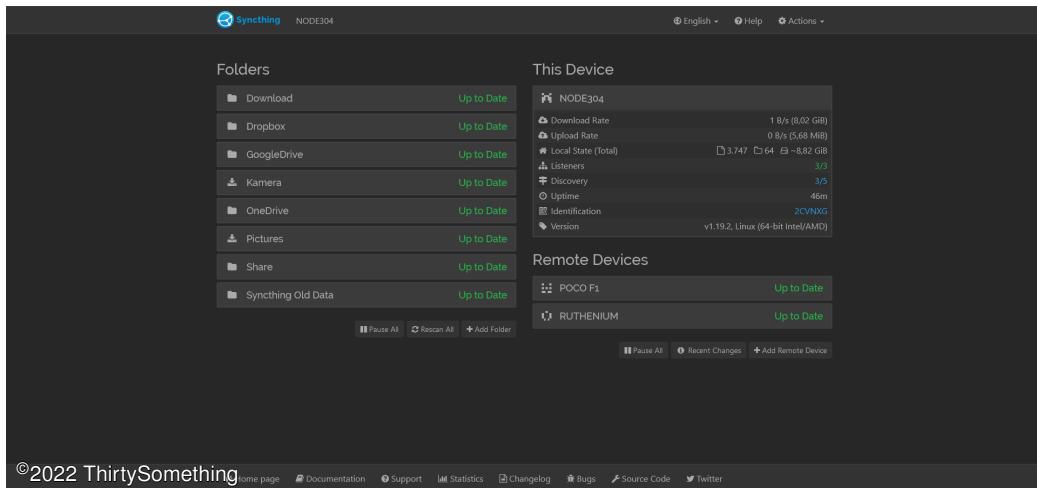


Figure 36: Syncthing

6.7 Watchtower

The [Watchtower](#) container is very simple to install. There is no need for a volume. And – they offer on their website a docker-compose.yaml file. Just copy this definition to a new Portainer stack, deploy and run. I've extended the default file with the settings of email notifications. The docker-compose.yaml for [Watchtower](#) looks like:

```

version: "3.8"
services:
  watchtower:
    # Run check all 3 hours
    command: --interval 10800
    container_name: watchtower
    environment:
      # WATCHTOWER_MONITOR_ONLY: 'true'
      WATCHTOWER_NOTIFICATIONS: email
      WATCHTOWER_NOTIFICATION_EMAIL_FROM: <email>
      WATCHTOWER_NOTIFICATION_EMAIL_TO: <email>
      WATCHTOWER_NOTIFICATION_EMAIL_SERVER: <smtp-server>
      WATCHTOWER_NOTIFICATION_EMAIL_SERVER_PORT: <smtp-server-port>
      WATCHTOWER_NOTIFICATION_EMAIL_SERVER_USER: <email>

```

```

WATCHTOWER_NOTIFICATION_EMAIL_SERVER_PASSWORD: <password>
WATCHTOWER_NOTIFICATION_EMAIL_DELAY: 2
image: containrrr/watchtower:latest
restart: unless-stopped
volumes:
- /var/run/docker.sock:/var/run/docker.sock

```

This container does not have any user interface. The purpose of this container is to keep all other containers with the :latest suffix up to date. In concrete means this to check for newer versions of containers and will update/restart them automagically if required. For german users there is an [introduction](#) video available.

6.8 MariaDB

As developer there is a need for a database. I decided to use [MariaDB](#). The docker-compose.yaml for [MariaDB](#) looks like:

```

version: "3.8"
services:
  mariadb:
    container_name: mariadb
    environment:
      MARIADB_ROOT_PASSWORD: <password>
    image: mariadb:latest
    ports:
      - 3306:3306
    restart: unless-stopped
    volumes:
      - mariadb-config:/etc/mysql/conf.d
      - mariadb-data:/var/lib/mysql
  volumes:
    mariadb-config:
    mariadb-data:

```

6.9 phpMyAdmin

To administrate the database I'm using this UI. The docker-compose.yaml for [phpMyAdmin](#) looks like:

```

version: "3.8"
services:
  phpmyadmin:
    container_name: phpmyadmin
    environment:
      PMA_HOST: <IP of NAS>
    image: phpmyadmin:latest
    ports:
      - 8088:80
    restart: unless-stopped

```

And here we go:



©2022 ThirtySomething

Figure 37: phpMyAdmin

6.10 Mosquitto

I used [Mosquitto](#) in some projects. For testing purposes I've used the public version of [Mosquitto](#) or installed locally one on my developer machine. Now it's time to run it on my [NAS](#). The docker-compose.yaml for [Mosquitto](#) looks like:

```
version: "3.8"
services:
  mosquitto:
    container_name: mosquitto
    environment:
      - PUID=1000
      - GUID=1000
    image: eclipse-mosquitto:latest
    ports:
      - 1883:1883
      - 9001:9001
    restart: unless-stopped
    volumes:
      - mosquitto-config:/mosquitto/config
      - mosquitto-data:/mosquitto/data
      - mosquitto-log:/mosquitto/log
volumes:
  mosquitto-config:
  mosquitto-data:
  mosquitto-log:
```

6.11 Nextcloud

The docker-compose.yaml for [Nextcloud](#) looks like:

```
version: "3.8"
services:
  nextcloud:
    container_name: nextcloud
    environment:
      MAIL_FROM_ADDRESS: <email address>
      MYSQL_DATABASE: <database>
      MYSQL_HOST: <IP of NAS>
      MYSQL_PASSWORD: <password>
      MYSQL_USER: <username>
      NEXTCLOUD_ADMIN_PASSWORD: <password>
      NEXTCLOUD_ADMIN_USER: <username>
      PHP_MEMORY_LIMIT: 2048M
      PHP_UPLOAD_LIMIT: 4096M
      SMTP_AUTHTYPE: login
      SMTP_HOST: <mail host>
      SMTP_NAME: <email address>
      SMTP_PASSWORD: <email password>
      SMTP_PORT: <mail port>
      SMTP_SECURE: <mail protocol>
    image: nextcloud:latest
    ports:
      - 8880:80
    restart: unless-stopped
    volumes:
      - nextcloud-config:/var/www/html/config
      - nextcloud-data:/var/www/html/data
      - nextcloud-html:/var/www/html
volumes:
  nextcloud-config:
  nextcloud-data:
  nextcloud-html:
```

After the first startup a little bit patient is required. This is caused by the database installation (schema, tables, ...). Additional I logged in to the console of the [NAS](#) and extended the [Nextcloud](#) settings:

```
cd /srv/<omv-raid>/docker/volumes/nextcloud_nextcloud-config/_data
vi config.php
# Add trusted domains
'trusted_domains' =>
array (
  0 => '<IP of NAS>',
),
```

Figure 38: Extended Nextcloud config

This is required for the logon to the user interface.

6.12 Monitoring

Beside the configuration of [Syncthing](#) and [Nextcloud](#) this is an Additional challenge – setup some [Monitoring](#) for the host (the [NAS](#)) and the [Docker](#) containers. Because of several components required here, the stack is more complicated than the others.

The docker-compose.yaml for [Monitoring](#) looks like:

```
version: "3.8"
services:
  cAdvisor:
    container_name: cAdvisor
    devices:
      - /dev/kmsg
    expose:
      - 8888
    image: gcr.io/cadvisor/cadvisor:latest
    networks:
      - monitoring
    privileged: true
    ports:
      - 8005:8080
    volumes:
      - /:/rootfs:ro
      - /var/run:/var/run:rw
      - /sys:/sys:ro
      - /var/lib/docker/:/var/lib/docker:ro
      - /dev/disk/:/dev/disk:ro
  networks:
    monitoring:
      driver: bridge
```

<https://medium.com/@mertcan.simsek276/docker-monitoring-with-cadvisor-prometheus-and-grafana-adef1202bf8>

<https://github.com/stefanprodan/dockprom>

<https://www.upnxtblog.com/index.php/2019/03/05/monitoring-docker-containers-using-prometheus-cadvisor-grafana/>

<https://www.devopsart.com/2021/03/step-by-step-to-monitor-docker.html>

<https://stackoverflow.com/questions/42248198/how-to-mount-a-single-file-in-a-volume>

<https://www.anovaapps.com/lets-talk-how-to-configure-portainer-and-prometheus-in-containers/>

6.13 All-In-One

It is also possible to have an *All-In-One* file with all containers used as one file. The docker-compose.yaml for [All-In-One](#) looks like:

```
version: "3.8"
services:
  # RDBMS
  mariadb:
    container_name: mariadb
    environment:
      MARIADB_ROOT_PASSWORD: <password>
    image: mariadb:latest
    ports:
      - 3306:3306
    restart: unless-stopped
    volumes:
      - mariadb-config:/etc/mysql/conf.d
      - mariadb-data:/var/lib/mysql
  # MQTT broker
  mosquitto:
    container_name: mosquitto
    environment:
      - PUID=1000
      - GUID=1000
    image: eclipse-mosquitto:latest
    ports:
      - 1883:1883
      - 9001:9001
    restart: unless-stopped
    volumes:
      - mosquitto-config:/mosquitto/config
      - mosquitto-data:/mosquitto/data
      - mosquitto-log:/mosquitto/log
  # Private cloud
  nextcloud:
    container_name: nextcloud
    environment:
      MYSQL_DATABASE: <database>
      MYSQL_USER: <username>
      MYSQL_PASSWORD: <password>
      MYSQL_HOST: <IP of NAS>
      NEXTCLOUD_ADMIN_USER: <username>
      NEXTCLOUD_ADMIN_PASSWORD: <password>
      PHP_MEMORY_LIMIT: 2048M
      PHP_UPLOAD_LIMIT: 4096M
    image: nextcloud:latest
    ports:
      - 8880:80
    restart: unless-stopped
    volumes:
      - nextcloud-config:/var/www/html/config
      - nextcloud-data:/var/www/html/data
      - nextcloud-html:/var/www/html
  # RDBMS admin tool
  phpmyadmin:
    container_name: phpmyadmin
    environment:
      PMA_HOST: <IP of NAS>
    image: phpmyadmin:latest
    ports:
      - 8088:80
    restart: unless-stopped
  # Version control system
  scmmanager:
    container_name: scmmanager
    image: cloudogu/scm-manager:latest
```

```
ports:
  - 2222:2222
  - 8080:8080
restart: unless-stopped
volumes:
  - scm-config:/var/cache/scm/work
  - scm-data:/var/lib/scm
# File synchronization
syncthing:
  container_name: scmanager
  environment:
    - PUID=1000
    - GID=1000
  image: syncthing/syncthing:latest
  ports:
    - 8384:8384
    - 21027:21027/udp
    - 22000:22000/tcp
    - 22000:22000/udp
  restart: unless-stopped
  volumes:
    - syncthing-data:/var/syncthing
# Container update utility
watchtower:
  container_name: watchtower
  environment:
    # WATCHTOWER_MONITOR_ONLY: 'true'
    WATCHTOWER_NOTIFICATIONS: email
    WATCHTOWER_NOTIFICATION_EMAIL_FROM: <email>
    WATCHTOWER_NOTIFICATION_EMAIL_TO: <email>
    WATCHTOWER_NOTIFICATION_EMAIL_SERVER: <smtp-server>
    WATCHTOWER_NOTIFICATION_EMAIL_SERVER_PORT: <smtp-server-port>
    WATCHTOWER_NOTIFICATION_EMAIL_SERVER_USER: <email>
    WATCHTOWER_NOTIFICATION_EMAIL_SERVER_PASSWORD: <password>
    WATCHTOWER_NOTIFICATION_EMAIL_DELAY: 2
  image: containrrr/watchtower
  restart: unless-stopped
  volumes:
    - /var/run/docker.sock:/var/run/docker.sock

volumes:
  # RDBMS
  mariadb-config:
  mariadb-data:
  # MQTT broker
  mosquitto-config:
  mosquitto-data:
  mosquitto-log:
  # Private cloud
  nextcloud-config:
  nextcloud-data:
  nextcloud-html:
  # Version control system
  scm-config:
  scm-data:
  # File synchronization
  syncthing-data:
```

7 Ports

It's always a good idea to remember the used ports. This section will give you an overview about the used ports and the name of the application using this port.

7.1 Ports by application

Application	Port number	Comment
MariaDB	3306	Database connection port
Mosquitto	1883	MQTT
Mosquitto	9001	MQTT
Nextcloud	8880	UI
OMV	80	UI
PhotoPrism	2342	UI
phpMyAdmin	8088	UI
Portainer	9000	UI
ReadyMedia	8200	UPnP
SCM-Manager	8080	UI
SCM-Manager	2222	ssh
Syncthing	8384	UI
Syncthing	TCP:22000	Filetransfer
Syncthing	UDP:22000	Filetransfer
Syncthing	UPD:21027	Receive local discovery broadcasts

Table 2: Ports by application

7.2 Ports by port number

Application	Port number	Comment
-------------	-------------	---------

OMV	80	UI
Mosquitto	1883	MQTT
SCM-Manager	2222	ssh
PhotoPrism	2342	UI
MariaDB	3306	Database connection port
SCM-Manager	8080	UI
phpMyAdmin	8088	UI
ReadyMedia	8200	UPnP
Nextcloud	8880	UI
Portainer	9000	UI
Mosquitto	9001	MQTT
Syncthing	8384	UI
Syncthing	UPD:21027	Receive local discovery broadcasts
Syncthing	TCP:22000	Filetransfer
Syncthing	UDP:22000	Filetransfer

Table 3: Ports by port number

A svnExport.sh

```
#!/bin/bash
#+-----+
#| Script to export configured svn repositories |
#+-----+
# Comment line out for debugging purposes
# set -x
#+-----+
#| Variable definitions |
#+-----+
# location of all repositories
VAR_PATH SVN="/srv/dev-disk-by-uuid-44c66e2f-7122-4c7c-9b2a-258139e35584/docker/volumes/scmmanager_scm-data/_data/repositories/*"
# suffix for SCM organized repositories
SUFFIX SVN=data
# filename containing real repository name
META SVN=metadata.xml
# maximum days to keep a backup
INT AGE=5
# file extension
STR EXT=gz
# current date
STR DATE=$(date +%Y-%m-%d)
# get current name of backup folder
DIR EXPORT=$(dirname "${0}")
DIR EXPORT=$(realpath "${DIR EXPORT}")

#+-----+
#| Check for valid SVN repository |
#+-----+
function is_svn_repository {
    svnlook info "${1}" >/dev/null 2>&1
    echo $?
}

#+-----+
#| Get base name for SVN repository |
#+-----+
function get_svn_base_name {
    REPOBASE=$(dirname "${1}")/${META SVN}
    REPONAME=$(xmlstarlet sel -T -t -m "/repositories/name" -v "/repositories/name" < "${REPOBASE}")
    echo "${REPONAME}"
}

#+-----+
#| Create name for SVN repository for export |
#+-----+
function get_svn_destination_name {
    REPOBASE=$(get_svn_base_name "${1}")
    echo "${DIR EXPORT}/${REPOBASE}-${STR DATE}.${STR EXT}"
}

#+-----+
#| Delete backups older than specified age |
#+-----+
function drop_old_exports {
    PATTERN=$(get_svn_base_name "${1}")
    FTK=$((0 + ${INT AGE}))
    echo "$(date +'%Y%m%d-%H:%M:%S'): Keep the last ${INT AGE} backups"
    COUNTER=0
    for CURRENT_DUMP in $(find "${DIR EXPORT}" -name "${PATTERN}.*.${STR EXT}" | sort -nr); do
        if [[ "${CURRENT_DUMP}" -lt "${FTK}" ]]; then
            echo "Keep dump [${CURRENT_DUMP}]"
        else
            echo "Delete dump [${CURRENT_DUMP}]"
            rm "${CURRENT_DUMP}"
        fi
        COUNTER=$((COUNTER + 1))
    done
    echo ""
}

#+-----+
#| Export SVN repository |
#+-----+
function export_svn_repository {
    VAR_DEST_NAME=$(get_svn_destination_name "${1}")
    echo "$(date +'%Y%m%d-%H:%M:%S'): Dumping repo [${1}] to [${VAR_DEST_NAME}]"
    svnadmin dump "${1}" | gzip > "${VAR_DEST_NAME}"
}

#+-----+
```

```
#| Loop over all repositories |  
#+-----+  
echo "=====  
echo "***** Start export of SVN repositories for date [${STR_DATE}]"  
for VAR_CURRENT_DIR in ${VAR_PATH SVN}; do  
    SVN_REPO="${VAR_CURRENT_DIR}/${SUFFIX SVN}"  
    if [[ ${is_svn_repository "${SVN_REPO}"} -eq 1 ]]; then  
        echo "${(date +'%Y%m%d-%H:%M:%S')}: Skip non SVN repository [${SVN_REPO}]."  
        echo ""  
    else  
        export_svn_repository "${SVN_REPO}"  
        drop_old_exports "${SVN_REPO}"  
    fi  
    echo "-----"  
done  
echo ""
```

List of Figures

1	A quote from John Lennon	6
2	The OMV login page	9
3	The OMV disks	10
4	The OMV RAID	11
5	The OMV filesystem on the RAID	11
6	The OMV shared folders	12
7	The OMV users home directory	13
8	The OMV CIFS settings	13
9	The OMV CIFS shares	14
10	The OMV advanced CIFS settings	14
11	The OMV ClamAV plugin	15
12	The antivirus settings	15
13	The antivirus on access scan	16
14	The antivirus scheduled scan	16
15	The antivirus system load on scan	17
16	The MiniDLNA plugin	17
17	The MiniDLNA settings	18
18	The MiniDLNA shares	18
19	The OMV extras installation	19
20	The OMV extras plugin	19
21	The OMV autoshutdown plugin	20
22	The OMV network card setup	20
23	The autoshutdown setup 1	21
24	The autoshutdown setup 2	21
25	The autoshutdown setup 3	22
26	The OMV PhotoPrism plugin	22
27	The OMV PhotoPrism setup	23
28	The PhotoPrism login	23
29	The Docker setup	24
30	The Portainer setup	25
31	The Portainer login	25
32	Containerlist	26
33	The SCM-Manager login	27
34	Cron command for svnExport	28
35	The SCM-Manager backup task	28
36	Syncthing	29
37	phpMyAdmin	31
38	Extended Nextcloud config	32

List of Tables

1	Change history	3
2	Ports by application	36
3	Ports by port number	37

Glossary

All-In-One AIO is shorthand for All-In-One [32](#)

ClamAV [ClamAV](#), an open source antivirus software [14](#)

Docker Container based virtualization [4](#), [6](#), [10](#), [18](#), [23](#), [26](#), [32](#)

Duplicati [Duplicati](#), free backup software [25](#)

git [git](#), a version control system [25](#), [26](#)

MariaDB [MariaDB](#), a RDBMS [25](#), [29](#), [35](#), [36](#)

MinIO [MinIO](#), multi-cloud object storage [25](#)

Monitoring [Monitoring](#) system resources and performance in a computer system [32](#)

Mosquitto [Mosquitto](#), an open source MQTT broker [25](#), [30](#), [35](#), [36](#)

NAS Network Attached Storage [3](#), [4](#), [6](#), [13](#), [16](#), [18](#), [23](#), [26](#), [30–32](#)

Nextcloud [Nextcloud](#), the self-hosted productivity platform that keeps you in control [25](#), [31](#), [32](#), [35](#), [36](#)

OMV [Open Media Vault](#), a NAS operating system [6](#), [8](#), [11](#), [14](#), [16](#), [23](#), [27](#), [35](#), [36](#)

OMV extras [Open Media Vault Extras](#), value added plugins to [OMV](#) [17](#), [23](#)

PhotoPrism [PhotoPrism](#), AI powered photo manager [21](#), [35](#), [36](#)

phpMyAdmin [phpMyAdmin](#), an UI for [MariaDB](#) [25](#), [29](#), [35](#), [36](#)

Pi-hole [Pi-hole](#), network-wide ad blocking [25](#)

Portainer [Portainer](#), a container management tool [18](#), [23–25](#), [35](#), [36](#)

ReadyMedia [ReadyMedia](#), a simple media server software [16](#), [35](#), [36](#)

restic [restic](#), backups done right [25](#)

SCM-Manager [SCM-Manager](#), a version control system server [25–27](#), [35](#), [36](#)

Subversion [Subversion](#), a version control system [25](#), [26](#)

Syncthing [Syncthing](#), file synchronization [25](#), [27](#), [28](#), [32](#), [35](#), [36](#)

Synology [Manufacturer of NAS systems](#) [3](#)

Watchtower [Watchtower](#), container management utility [28](#)

WOL [Wake On LAN](#), starts computer by specific network signal [18](#), [19](#)