


Class starts in 5 minutes

Agenda

- ↳ Create our first spring boot app ✓
- ↳ MVC architecture ✓
- ↳ APIs ✓
- ↳ Rest APIs $\Rightarrow$ good practices around apis

Spring Boot APP

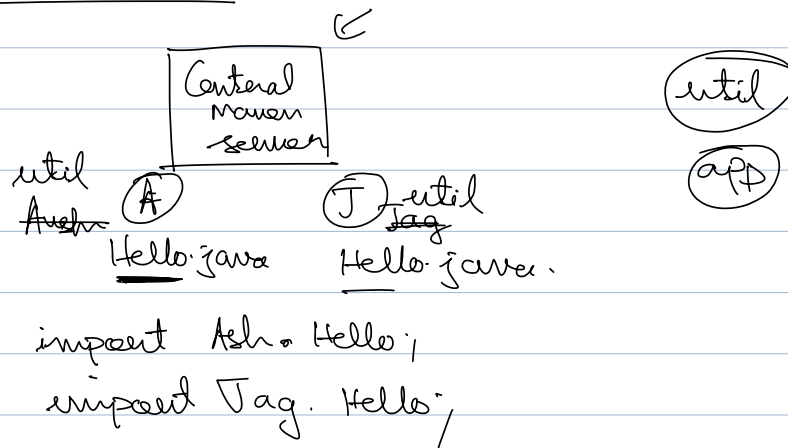

It is recommended to ~~see~~ give package names in a certain way:

- ① group = reverse of your domain
eg) com.scaler
- ② Artifact = name of your project

package = group.artifact

eg) com.scaler.calc dev.jag.calc
~~com.scaler.calc.hello~~
 . pig.hello

↳ com.scaler . Product Service
 . Auth Service

group = com.flipkart authfact = <u>auth</u>	group = com.flipkart authfact = <u>payment</u>
--	---

group

com.flipkart.auth
↳
↳
↳

MVC

↓

@ Request Mapping ("/login")

public void handleLogin() {

- [

①

Validate the parameters

②

Talk to DB to check username & password

③

Send email =


④

Send mobile notification

]
- }

MVC ⇒ Gives recommendation around how to make your code more manageable.

Restaurant

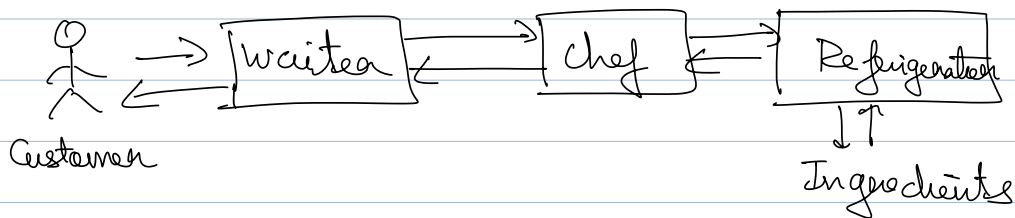


↳ Division of responsibilities

M → Model

V → View

C → Controller

login ⇒ user details

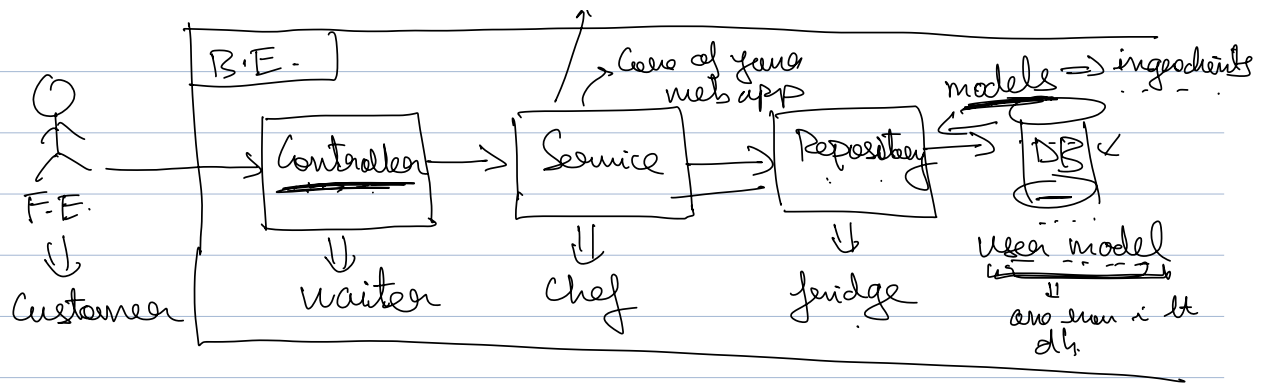

Controller => First point of contact for a request
 => Validates the request before transferring it to the service

Service => Where the business logic is written

```

class ProductService {
    ProductRepository pr;
    fetchAllProducts() {
        // ...
        data = pr.fetchAllData();
        // process data
        // return
    }
}
  
```

MySQL
 ↓
 MongoDB

```


class ProductRepository {
    fetchAllProducts() {
        [ data = sql.execute("select * from ...");
        return data;
    }
}
  
```

}

View:

BE → UI

"name"

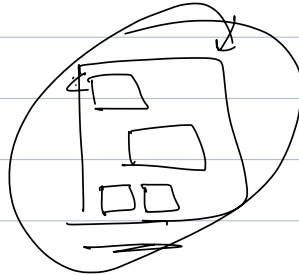

F.E. ↙

MVC ⇒ Just a recommendation

APIs


↳ Application Programming Interface

↳ Contract

↳ API is nothing but a contract

↳ Contract between two applications.

eg)

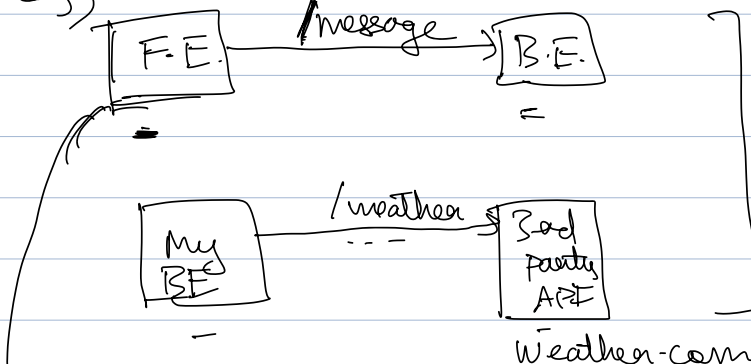

2 apps are talking to each other using some contract.

→ Predefined way using which F.E. can access data.

/message {
 userid=
 timeframe=
}

List

"hello" → /hello → API

Contract

F.E: Continue giving data as List

B.E: Call /message & pass userid & time frame

→ API

Good practices while designing your APIs ⇒ REST

Doubts

class ProductService { ⇒ Chef

 ProductRepository pr;

 fetchAllProducts() {

 [data = pr.fetchAllData(s; ")]

 // process data

 // return

}

```

class ProductRepository {
    fetchAllProducts() {
        [ data = sql.execute("select * from ...")
        set data;
        if (data != null) {

```

