

# An open source data science platform to build production-grade machine learning projects

Romain Avouac, Frédéric Comte and Thomas Faria

**Abstract** In recent years, statisticians trained in data science methods have been joining National Statistical Offices (NSOs), aiming to harness non-traditional data sources and machine learning methods to enhance the production of official statistics. Despite their expertise, these professionals encounter significant barriers, including limited computational resources, inflexible development environments that don't foster collaborative work, and limited tools to transition from innovative experiments to production-ready solutions. This paper presents Onyxia, an open-source project developed to address these challenges by enabling organizations to build modern and flexible data science environments that enhance the autonomy of statisticians. With Onyxia and its showcase instance, the SSP Cloud, we demonstrate how cloud technologies can be made readily accessible, fostering innovation, collaboration, and reproducibility within the realm of official statistics. Through a case study of the classification of the activity domain of French companies, we illustrate how these tools have been instrumental in operationalizing machine learning models in accordance with MLOps principles, marking a significant step forward in the valorisation of data science projects at Insee.

**Key words:** official statistics, big data, cloud technologies, data science, machine learning, MLOps, reproducibility, open source

---

Romain Avouac

Insee, 88 avenue François Verdier, Montrouge, e-mail: [romain.avouac@insee.fr](mailto:romain.avouac@insee.fr)

Frédéric Comte

Insee, 88 avenue François Verdier, Montrouge, e-mail: [frederic.comte@insee.fr](mailto:frederic.comte@insee.fr)

Thomas Faria

Insee, 88 avenue François Verdier, Montrouge, e-mail: [thomas.faria@insee.fr](mailto:thomas.faria@insee.fr)

## 1 Introduction

In recent years, the European Statistical System (ESS) has committed to leverage non-traditional data sources in order to improve the process of statistical production, an evolution that is encapsulated by the concept of Trusted Smart Statistics [33]. This dynamic is accompanied by innovations in the statistical processes, so as to be able to take advantage of the great potential of these new sources (greater timeliness, increased spatio-temporal resolution, etc.), but also to cope with their complexity or imperfections. At the forefront of these innovations are machine-learning methods and their promising uses in the coding and classification fields, data editing and imputation [16]. The multiple challenges faced by statistical institutes because of this evolution are addressed in the Bucharest Memorandum on Official Statistics in a Datafied Society (Trusted Smart Statistics), which predicts that "the variety of new data sources, computational paradigms and tools will require amendments to the statistical business architecture, processes, production models, IT infrastructures, methodological and quality frameworks, and the corresponding governance structures", and consequently invites the ESS to assess the required adaptations and prioritize them [10].

In line with these recommendations, much work has been done in the context of successive projects at the European level in order to operationalize the use of non-traditional data sources in the production of official statistics. Within the scope of the ESSnet Big Data II project (2018-2020), National Statistical Offices (NSOs) have been working across a wide range of themes (online job vacancies, smart energy, tracking ships, etc.) in order to put together the building blocks for using these sources in actual production processes and identify their limitations [12]. However, while a substantial amount of work has been devoted to developing methodological frameworks [9, 35], quality guidelines [19] as well as devising business architectures that make third-party data acquisition more secure [32], not much has been said about the IT infrastructures and skills needed to properly deal with these new objects.

Big data sources, which are at the heart of Trusted Smart Statistics, have characteristics that, due to their volume, their velocity (speed of creation or renewal) or their variety (structured but also unstructured data, such as text and images), make them particularly complex to process. Besides, the "skills and competencies to automate, analyse, and optimize such complex systems are often not part of the traditional skill set of most National Statistical Offices" [3]. Not incidentally, an increasing number of public statisticians trained as data scientists have joined NSOs in recent years. Within its multiple meanings, the term "data scientist" reflects the increased involvement of statisticians in the IT development and orchestration of their data processing operations, beyond merely the design or validation phases [7]. However, based on our observations at Insee and other French statistical offices, the ability of these new data professionals to derive value from big data sources and machine learning methods is limited by several challenges.

A first challenge is related to the lack of proper IT infrastructures to tackle the new data sources that NSOs now have access to as well as the accompanying need for new statistical methods. For instance, big data sources require huge storage

capacities and often rely on distributed computing frameworks to be processed [24]. Similarly, the adoption of new statistical methods based on machine learning algorithms often require IT capacities — in particular, GPUs (graphical processing units) — to massively parallelize computations [34]. Such resources are not readily available in traditional IT infrastructures. Furthermore, these new infrastructures generally require specific skills — especially to build and maintain them — that are not easily found in NSOs.

Another major challenge lies in equipping statisticians with development environments that enable them to experiment more freely. The essence of innovation in statistical work lies in the ability to swiftly adapt to and incorporate new tools and methodologies. This agility is hampered when statisticians depend excessively on IT departments to provision resources or install new software packages. In traditional setups — personal computers, virtual desktops on centralized architectures — IT departments generally prioritize security and system stability to the provision of new services, which limits the innovation potential. Besides, these rigid environments make it harder to implement development best practices, such as collaborative work — which requires environments where experiments can be easily shared with peers — and reproducibility.

A third challenge is related to the difficulty of transitioning from innovative experiments to production-ready solutions. Even when statisticians have access to development environments in which they can readily experiment, the step towards deploying an application or a model for its users to leverage it is generally very large. Production environments often differ from development environments in such a way that the additional development costs needed to go from a proof of concept to an industrialized solution that actually serves users can limit the feasibility of this transition. Furthermore, in the case of machine learning projects, models that have been deployed require a proper monitoring to ensure that they maintain their accuracy and utility over time, and generally require periodic or continuous improvements. Again, this pleads for more flexible environments that enable statisticians to manage the complete lifecycle of their data science projects in a more continuous way.

We argue that these various challenges have an underlying common theme: the need for more autonomy. The ability of data science methods to improve and potentially transform the production of official statistics crucially depends on the ability of statisticians to carry out innovative experiments more freely. To do so, they need to have access to substantial and diverse computing resources that enable them to tackle the volume and diversity of big data sources and leverage machine learning methods to better deal with these data. Such experimental projects require, in turn, flexible development environments that foster collaborative work in order to leverage the diversity of profiles and skills that compose project teams. Finally, to derive value from these experiments, statisticians require tools to deploy applications as proof-of-concepts and orchestrate their statistical operations autonomously.

Against that background, we developed Onyxia: an open source project that enables organizations to deploy data science platforms that foster innovation by giving

statisticians more autonomy<sup>1</sup>. This paper aims at describing the full thought process behind the project's inception and exemplify the way in which it empowers statisticians at Insee, thus becoming a cornerstone of our innovation strategy. Section 2 provides an in-depth analysis of the data ecosystem's latest developments, casting light on the technological choices that have shaped the development of a modern data science environment tailored to the specific needs of statisticians. In particular, we show how cloud-native technologies — particularly containers and object storage — are key to building scalable and flexible environments that can enhance autonomy while promoting reproducibility in the production of official statistics. However, despite their appealing attributes for modern data science applications, the complexity of configuring and utilizing cloud technologies often poses barriers to their broad adoption. In section 3, we detail the core of the Onyxia project: how we made cloud technologies accessible to statisticians through a user-friendly interface and an extensive catalogue of ready-to-use data science environments, while circumventing potential vendor lock-in effects for both the institution and their users. We also show how providing an open-innovation instance of Onyxia, the SSP Cloud, greatly facilitated the adoption of these technologies and fostered improved development practices. Finally, through the case study of the classification of French companies' activity, section 4 illustrates how leveraging these technologies greatly facilitated the deployment of machine learning models at Insee in alignment with the industry best practices — namely, MLOps principles.

## 2 Principles for building a modern and flexible data architecture for official statistics

With the emergence of big data sources and new methodologies offering significant promise to improve the production process of official statistics, statisticians trained in data science techniques are eager to innovate. However, their ability to do so is limited by several challenges. Central among these challenges is the need for greater autonomy — be it in scaling resources to match statistical workloads, deploying proofs of concept with agility and in a collaborative manner, etc. Against this background, our aim was to design a data science platform that not only manages big data efficiently but also empowers statisticians by enhancing their autonomy. To achieve this, we delved into the evolving data ecosystem in order to identify significant trends with the potential to overcome the aforementioned limitations<sup>2</sup>. Our findings indicate that

---

<sup>1</sup> <https://github.com/InseeFrLab/onyxia>

<sup>2</sup> As a preamble to this review, we should note that, although we did our best to ground our insights in the academic literature, a lot of it stems from informal knowledge gathered through diligent and ongoing technology watch. In the rapidly evolving data ecosystem, traditional research papers are increasingly giving way to blog posts as the primary references for cutting-edge developments. This shift is largely due to the swift pace at which big data technologies and methodologies are advancing, making the lengthy publication process of formal research often not the preferred way of disseminating timely insights and innovations.

leveraging cloud-native technologies, particularly containers and object storage, is key to building infrastructures capable of handling large and varied datasets in a flexible, cost-effective manner. Furthermore, these technologies significantly enhance autonomy, facilitating innovation and promoting reproducibility in the production of official statistics.

## 2.1 Limitations of traditional big data architectures

Over the last decade, the landscape of big data has dramatically transformed. Following the publication of Google's seminal papers that introduced the MapReduce paradigm [15, 8], Hadoop-based systems rapidly became the reference architecture of the big data ecosystem, celebrated for their capability to manage extensive datasets through the use of distributed computing. The inception of Hadoop marked a revolutionary step, enabling organizations to process and analyze data at an unprecedented scale. Basically, Hadoop provided companies with all-rounded capabilities for big data analytics: tools for ingestion, data storage (HDFS), and computing capacities (Spark, among others) [11], thus explaining its rapid adoption across industries.


In the late 2010's, Hadoop-based architectures have experienced a clear decline in popularity. In traditional Hadoop environments, storage and compute were co-localized by design: if the source file is distributed across multiple servers (horizontal scaling), each section of the source file is directly processed on the machine hosting that section, so as to avoid network transitions between servers. In this paradigm, scaling the architecture often meant a linear increase in both compute and storage, regardless of the actual demand. In a recent article provocatively titled "Big Data is Dead"<sup>3</sup>, Jordan Tigani, one of the founding engineers behind Google BigQuery, explains why this model doesn't fit the reality of most data-centric organizations anymore. First, because "in practice data sizes increase much faster than compute sizes". While the amount of data generated and thus needing to be stored may grow linearly over time, it is generally the case that we only need to query the most recent portions of it, or only some columns and/or groups of rows. Besides, Tigani points out that "the big data frontier keeps receding": advancements in server computing capabilities and declining hardware costs mean that the number of workloads that don't fit on a single machine — a simple yet effective definition of big data — has been continually decreasing. As a result, by properly separating storage and compute functions, even substantial data processing jobs may end up using "far less compute than anticipated [...] and might not even need to use distributed processing at all".

These insights strongly align with our own observations at Insee in recent years. As a use case of using big data infrastructures to improve statistical processes, an Insee team set up a Hadoop cluster as an alternative architecture to the one already in use to process sales receipt data in the context of computing the consumer price index. An acceleration of data processing operations by up to a factor of 10 was

---

<sup>3</sup> <https://motherduck.com/blog/big-data-is-dead/>

achieved, for operations that previously took several hours to perform [21]. Despite this increase in performance, this type of architectures were not reused later for several reasons. Mainly, the architecture proved to be expensive and complex to maintain, necessitating specialized technical expertise rarely found within NSOs [38]. But interestingly, subsequent projects involving large datasets didn't suffer much from this change, as their needs were actually very much in line with Tigani's observations. The bottleneck for these projects was generally on the side of computational needs rather than storage capacity. Furthermore, although these projects could still involve substantial data volumes, we observed that effective processing could be achieved using conventional software tools (R, Python) on single-node systems by leveraging recent important innovations from the data ecosystem. First, by using efficient formats to store the data such as Apache Parquet [13], which properties — columnar storage [1] (see figure1), optimisation for the "write once, read many" (WORM) paradigm, ability to partition data, etc. — make it particularly suited to analytical tasks such as those generally performed in official statistics [2]. Second, by performing computations using optimised in-memory computation frameworks such as Apache Arrow [14] or DuckDB [31]. Also based on columnar representation — thus working in synergy with Parquet files — both of these frameworks greatly improve data queries performance through the use of "lazy evaluation": instead of doing lots of separate operations (e.g. selecting columns and/or filtering rows, then computing new columns, then performing aggregations, etc.), they process them all at once in a more optimised way. As a result, computations are limited to the data effectively needed by the queries, enabling much larger-than-memory data processing on usual single-node machines.

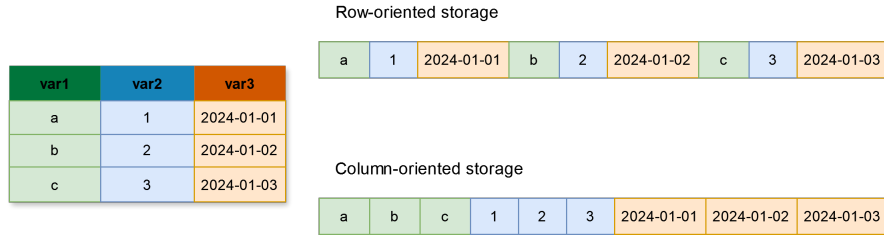

**Fig. 1** Row-oriented and column-oriented representation of a same dataset.

Note: Many statistical operations are analytical (OLAP) in nature: they involve selecting specific columns, computing new variables, performing group-based aggregations, etc. Row-oriented storage is not well-suited to analytical operations as it requires the full dataset to be read in memory to query it. Conversely, column-based storage allows only relevant data columns to be queried, significantly reducing read and processing times for analytical workloads. In practice, popular columnar formats such as Parquet use a hybrid-representation: they are primarily column-oriented but also implement clever row-based grouping to optimize filtering queries.

## 2.2 Embracing cloud-native technologies


In light of this evolution of the big data ecosystem, there has been a notable shift in recent years within the industry towards more flexible and loosely coupled architectures. The advent of cloud technologies has been instrumental in facilitating this shift. Unlike the era where Hadoop was prominent, network latency has become much less of a concern, making the traditional model of on-premise and co-located storage and compute solutions less relevant. In terms of the nature of the data that need to be processed, we are observing an evolution that some have described as moving "from big data to flexible data": modern data infrastructures are required not only to process large volumes but also to be adaptable in multiple dimensions: accommodating various data structures (ranging from structured, tabular formats to unstructured formats like text and images), ensuring data portability across multi-cloud and hybrid cloud environments, and supporting a diverse range of computational workloads (from parallel computations to deep learning models necessitating GPUs, as well as the deployment and management of applications) [23]. In recent years, two technologies have emerged in the data ecosystem as foundational technologies for achieving such flexibility in cloud-based environments: containerization and object storage.

In a cloud environment, the computer of the user becomes a simple access point to perform computations on a central infrastructure. This enables both ubiquitous access to and scalability of the services, as it is easier to scale a central infrastructure — usually horizontally, i.e. by adding more servers. However, such centralized infrastructures have two well-identified limitations that need to be dealt with: the competition between users in access to physical resources and the need to properly isolate deployed applications. The choice of containerization is fundamental as it tackles these two issues [4]. By creating “bubbles” specific to each service, containers guarantee application isolation while remaining lightweight, as they share the support operating system with the host machine (see. graph2). In order to manage multiple containerized applications in a systematic way, containerized infrastructures generally rely on an orchestrator software — the most prominent one being Kubernetes, an open-source project initially developed by Google to manage its numerous containerized workloads in production [39]. Orchestrators automate the process of deploying, scaling, and managing containerized applications, coordinating their execution across various servers. Interestingly, this property makes it possible to handle very large volumes of data in a distributed way: containers break down big data processing operations into a multitude of small tasks, organized by the orchestrator. This minimizes the required resources while providing more flexibility than hadoop-based architectures [40].

The other fundamental choice in a data architecture is the nature of data storage. In the cloud ecosystem, so-called "object storage" has become the de-facto reference [36] <sup>4</sup>. In this paradigm, files are stored as "objects" consisting of data, an identifier and metadata. This type of storage is optimized for scalability, as objects are not limited in size and the underlying technology enables cost-effective storage of

---

<sup>4</sup> Mainly because of Amazon's "S3" (Simple Storage Service) implementation.

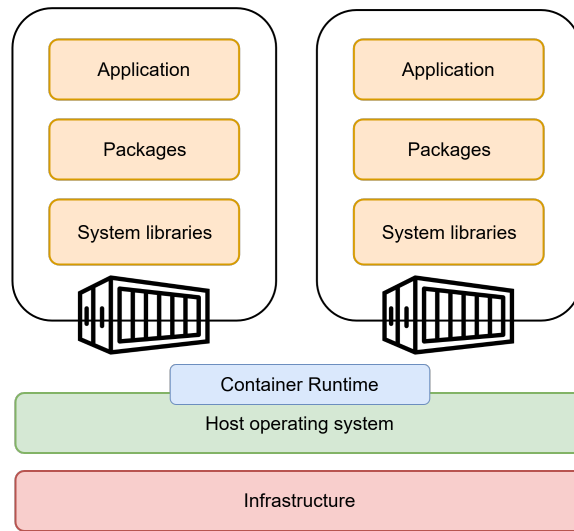

**Fig. 2** Architecture of a containerized environment.

Note: A container is a logical grouping of resources that makes it possible to encapsulate an application (e.g. Python code), the packages used (e.g. Pandas, NumPy) and system libraries (the Python interpreter, other OS-dependent libraries, etc.), in a single package. Containerized applications are isolated from one another through virtualization, which makes it possible to attribute specific physical resources to each application while guaranteeing complete independence between them. But contrary to virtual machines which also virtualize the operating system (OS), containers rely on a lightweight form of virtualization: the container shares the OS of the host infrastructure through the container runtime (e.g. Docker). As a result, containers are much more portable and can be readily deployed and redistributed.

(potentially very) large files. It is also instrumental in building a decoupled infrastructure such as discussed before: the data repositories — referred to as "buckets" — are directly searchable using standard HTTP requests through a standardized REST API. In a world where network latency is not the main bottleneck anymore, this means that storage and compute don't have to be on the same machines or even in the same location, and can thus scale independently according to specific organization demands. Finally, object storage is a natural complement to architectures based on containerized environments for which it provides a persistence layer — containers being stateless by design — and easy connectivity without compromising security, or even with strengthened security compared with a traditional storage system [27].




### **2.3 Leveraging cloud technologies to increase autonomy and foster reproducibility**

Understanding how the technological choices described in the technical discussion above are relevant in the context of official statistics require an in-depth review of statisticians' professional practices in their use of computing environments. At the end of the 2000s, with micro-computing at its peak, many of the technical resources used by statisticians at Insee were local: the code and processing software were located on individual computers, while data was accessed through a file-sharing system. Because of the limited scalability of personal computers, this setup greatly limited the ability of statisticians to experiment with big data sources or computationally intensive statistical methods, and involved security risks because of the widespread data dissemination within the organization. In order to overcome these limitations, a transition was made towards centralised IT infrastructures, concentrating all — and thus overall much more — resources on central servers. Such infrastructures, made available to statisticians through a shared, virtual desktop environment for ease of use, remains the dominant method for conducting statistical computations at Insee at the time of writing this lines.

Through our observations and discussions with fellow statisticians, it became evident that although the current IT infrastructure adequately supported the core activities of statistical production, it noticeably restricted statisticians' capacity to experiment freely and innovate. The primary bottleneck in this organization is the dependency of statistical projects on centralized IT decision-making, such as the allocation of computing resources, access to shared data storage, the use of pre-configured programming languages and packaging environments, etc. Besides, such dependencies often lead to a well-known phenomenon within the software development community that lies at the heart of the DevOps approach, where the priorities of developers — iterate rapidly to improve functionality in a continuous manner — often clash with IT's focus on security and process stability. On the contrary, it is our understanding that modern data science practices reflect an increased involvement of statisticians in the IT development and orchestration of their data processing operations, beyond merely the design or validation phases. New data science infrastructures must take this expanded role of their users into account, giving them more autonomy than conventional infrastructures.

Cloud technologies stand out as a powerful solution to grant statisticians this much-needed autonomy in their daily work, enabling a culture of innovation. Through object storage, users gain control over the storage layer, allowing them to experiment with diverse datasets without being constrained by the limited storage spaces typically allocated by IT departments. Containerization empowers users to customize their working environments to their specific needs — be it programming languages, system libraries, or package versions — while also providing the flexibility to scale their applications according to the required computing power and storage capacities. By design, containers also foster the development of portable applications, which enables smoother transitions between environments (development, qualification, production), ensuring that applications can be moved seamlessly without the

hurdles of environmental inconsistencies. Finally, with orchestration tools like Kubernetes, statisticians can more readily deploy applications and APIs and automatize the whole building process, sidestepping complexities associated with inconsistent or complex deployment environments. This capability aligns with the DevOps approach, enabling quicker iteration and building minimal prototypes as proofs of concept (POCs) rather than building the optimal (but time-consuming) solution for a pre-defined objective [22].

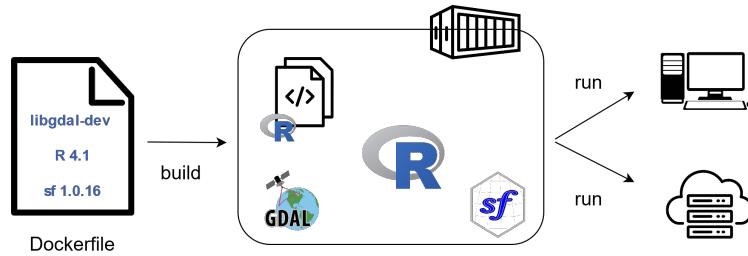

**Fig. 3** Containers foster reproducibility and portability by design.

Note: In a containerised environment, applications are created through script specifications — a paradigm known as "infrastructure as code". In a text file conventionally named "Dockerfile", data scientists can specify the working environment of their application: the application code, the software to be included (e.g. R), the packages used for their processing operations (e.g. the R package for geospatial computation *sf*), and the OS-dependent system libraries that are called by these packages (e.g. GDAL, the translator library for raster geospatial data formats used by most packages dealing with geospatial data). Importantly, the versions of the software and packages that were used to develop the application can be precisely specified, which guarantees reproducibility of the computations performed. A build step then creates an image associated to the Dockerfile, i.e. a packaged and compressed form of the working environment of the application. Images created this way are portable: they can be readily distributed — usually through a container registry — and executed in a reproducible manner on any infrastructure that has a container runtime.

Besides scalability and autonomy, these architectural choices also foster reproducibility of statistical computations. The concept of reproducibility — namely the ability to reproduce the result of an experiment by applying the same methodology to the same data — is a fundamental criterion of scientific validity [26]. It is also highly relevant in official statistics, as it serves as a foundation for transparency, which in turn is crucial for building and maintaining the public's trust. Fostering reproducibility in statistical production involves devising processing solutions that can produce reproducible statistics on the one hand, and that can be shared with peers on the other hand [25]. Traditional IT infrastructures — either a personal computer or a shared infrastructure with remote desktop access — fall short in this regard, as building a project or just computing a statistical indicator there generally involves a series of manual steps (installing system libraries, the programming language binary, projects packages, dealing with potentially conflicting versions, etc.) that can not be fully reproduced across projects. In comparison, containers are reproducible

by design, as their build process involves defining precisely all the needed resources as a set of processing operations in a standardized manner, from the "bare machine" to the running application [28]. Furthermore, these reproducible environments can be easily shared to peers as they can be readily published on open registries (for example, a container registry such as DockerHub) along with the source code of the application (for example, on a public software forge like GitHub or GitLab). This approach significantly enhances the re-usability of code projects, fostering a community-driven model of development and innovation.

### **3 Onyxia: an open source project to build cloud-native data science platforms**


The Onyxia project, initiated by the French Public Service and available at [onyxia.sh](https://onyxia.sh), is an open source project aimed at creating self-sufficient data science environments in the cloud or on-premises. This project can be seen as a "Platform as a Package" (PaaS) solution for organisations wishing to create a data science environment based on cloud technologies.

#### **3.1 Making cloud-technologies accessible to statisticians**

Our technology watch and literature review highlighted cloud-native technologies, in particular containerization and object storage, as instrumental in building a data science platform that is both scalable and flexible. Building on these insights, we established our initial on-premise Kubernetes cluster in 2020, integrating it with MinIO, an open-source object storage system designed to work seamlessly with Kubernetes. Yet, our first experiments highlighted a significant barrier to their widespread adoption: the complexity of their integration. This is an important consideration when building data architectures that prioritize modularity — an essential feature for the flexibility we aim to achieve. For instance, due to MinIO's compatibility with the Amazon S3 API, the storage source could easily be switched without requiring substantial modifications to one managed by a public cloud provider. However, modularity of the architecture components also entails that any data application launched on the cluster must be configured so as to communicate with all the components. For instance, in a big data setup, configuring Spark to operate on Kubernetes while interacting with datasets stored in MinIO requires an intricate set of configurations (specifying endpoints, access tokens, etc.), a skill set that typically lies beyond the expertise of statisticians.

This very insight is really the base of the Onyxia project : choosing technologies that foster autonomy won't actually foster autonomy if their complexity acts as a deterrent from widespread adoption in the structure. In recent years, statisticians at Insee already need to adapt to a changing environment in terms of their every-

day tools : transitioning from proprietary software (SAS) to open-source ones (R, Python), acculturating to technologies that improve reproducibility (version control with Git), consuming and developing APIs, etc. These changes, that make their activity more and more akin to the one of software developers, already imply significant training and changes in the modalities of work everyday. In this regard, adoption of cloud-technologies was utterly dependent on making them readily accessible.

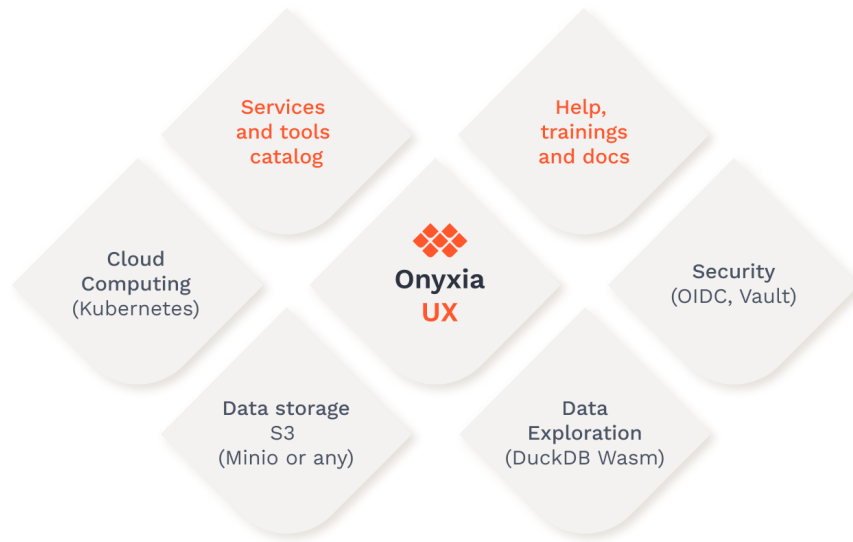

**Fig. 4** Onyxia is the technical binder between cloud-native modular components

To bridge this gap, we developed Onyxia, an application that essentially acts as interface between the modular components that compose the architecture (see fig 4). The main entypoint of the user is a user-friendly web application<sup>5</sup> that enables users to launch services from a data science catalog (see section 3.3) as running containers on the underlying Kubernetes cluster. The interface between the UI and Kubernetes is done by a lightweight custom API<sup>6</sup>, that essentially transforms the application request of the user into a set of manifests to deploy Kubernetes resources. For a given application, these resources are packaged under the form of Helm charts, a popular way of packaging potentially complex applications on Kubernetes [17]. Although users can configure a service to tailor it to their needs, they will most of the time just launch a service out-of-the-box and be able to start developing. This point really illustrates the added value of Onyxia in facilitating the adoption of cloud technologies. By injecting authentication information and configuration into the containers at the initialization, we ensure that users can launch and manage

<sup>5</sup> <https://github.com/InseeFrLab/onyxia-ui>

<sup>6</sup> <https://github.com/InseeFrLab/onyxia-api>

data science services in which they can interact seamlessly with the data from their bucket on MinIO, their sensitive information (tokens, passwords) stored in Vault, etc. This automatic injection, coupled with the pre-configuration of data science environments in Onyxia's catalogs of images<sup>7</sup> and associated helm-charts<sup>8</sup>, make it possible for users to execute potentially complex workloads - such as running distributed computations with Spark on Kubernetes using data stored in S3, or training deep-learning models using a GPU - without getting bogged down by the technicalities of configuration.

### 3.2 Architectural choices aimed at fostering autonomy

The Onyxia project is based on a few structuring principles, with a central theme : fostering autonomy. First, at the level of the organization by preventing vendor lock-in. In order to get a competitive edge, many commercial cloud providers develop applications and protocols that customers need to use to access cloud resources but that are not interoperable, greatly complexifying potential migrations to another cloud platform [30]. Recognizing these challenges, there is a trend towards endorsing cloud-neutral strategies [29] in order to reduce reliance on a single vendor's specific solutions. In contrast, the use of Onyxia is inherently not restrictive: when an organization chooses to use it, it chooses the underlying technologies - containerization and object storage - but not the solution. The platform can be deployed on any Kubernetes cluster, either on-premise or in public clouds. Similarly, although Onyxia was designed to be used with MinIO because it is an open-source object-storage solution, but is also compatible with objects storage solutions from various cloud providers (AWS, GCP).


The other important level at which Onyxia fosters autonomy is at the level of users. Proprietary softwares that have been used intensively in official statistics - such as SAS or STATA - also produce a vendor lock-in phenomenon. The costs of licensing are high and can evolve quickly, and users are tied in certain ways of performing computations, preventing progressive upskilling. On the contrary, Onyxia aspires to be removable; we want to enhance users' familiarity and comfort with the underlying cloud technologies rather than act as a permanent fixture in their workflow. An illustrative example of this philosophy is the platform's approach to user actions: for tasks performed through the UI, such as launching a service or managing data, we provide users with the equivalent terminal commands, promoting a deeper understanding of what actually happens on the infrastructure when triggering something. Furthermore, all the services offered through Onyxia's catalog are open-source.

Naturally, the way Onyxia makes statisticians more autonomous in their work depends on their needs and familiarity with IT skills. Statisticians that just want to have access to extensive computational resources to experiment with new data

---

<sup>7</sup> <https://github.com/InseeFrLab/images-datascience>

<sup>8</sup> <https://github.com/InseeFrLab/helm-charts-interactive-services>

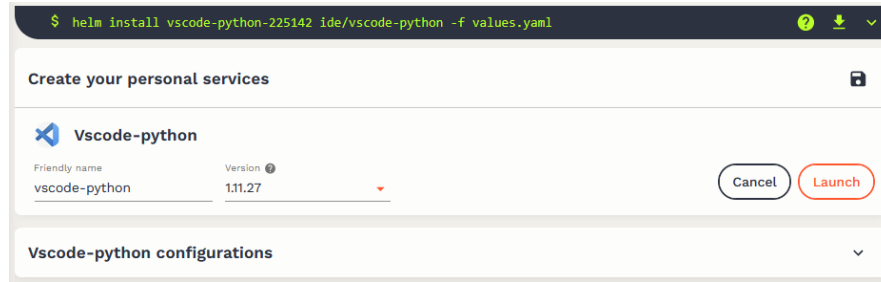

**Fig. 5** Launching a service through Onyxia’s UI.


Note: Services from Onyxia’s catalog can either be used vanilla or configured by the users to tailor them to their specific needs. In order to limit the dependence of users on Onyxia, each action performed by the user on the UI is accompanied by the actual command that is executed on the Kubernetes cluster.

sources or statistical methods will have access in a few clicks to easy-to-use, pre-configured data science environments, so that they can directly start to work and prototype their solution. However, many users want to go deeper and build actual prototypes of production applications for their projects: configuring initialization scripts to tailor the environments to their needs, deploying an interactive app that delivers data visualisation to users of their choice, deploying other services than those available in our catalogs, etc. For these advanced users to continue to push the boundaries of innovation, Onyxia gives them access to the underlying Kubernetes cluster. This means that users can freely open a terminal on an interactive service and interacts with the cluster - within the boundaries of their namespace - in order to apply custom resources and deploy custom applications or services.

Besides autonomy and scalability, the architectural choices of Onyxia also foster reproducibility of statistical computations. In the paradigm of containers, the user must learn to deal with resources which are by nature ephemeral, since they only exist at the time of their actual mobilization. This fosters the adoption of development best practices, notably the separation of the code — put on an internal or open-source forge such as GitLab or GitHub — the data — persisted on a specific storage solution, such as MinIO — and the computing environment. While this requires an entry cost for users, it also helps them to conceive their projects as pipelines, i.e. a series of sequential steps with well-defined inputs and outputs (akin to directed acyclic graph (DAG)). The projects developed in that manner are usually more reproducible and portable — they can work seamlessly on different computing environments — and thus also more readily shareable with peers.

### 3.3 An extensive catalogue of services to cover the entire lifecycle of data science projects

In developing the Onyxia platform, our intention was to provide statisticians with a comprehensive environment designed to support the prototyping of their data science projects from start to finish. As depicted in Figure 6, the platform offers a vast array of services that span the complete lifecycle of a data science project.

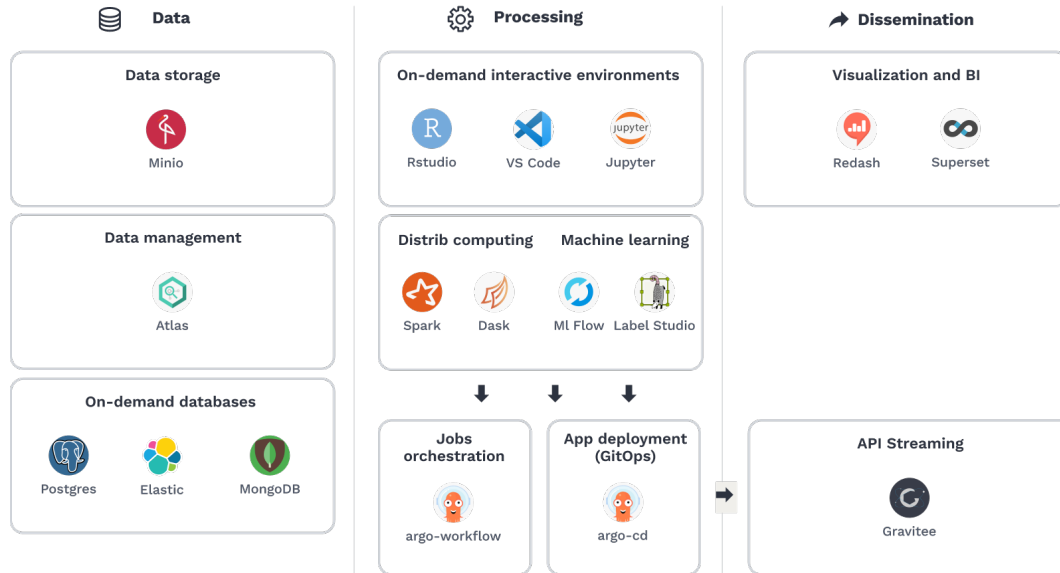

**Fig. 6** Onyxia's catalog aims at covering the entire lifecycle of data science projects

The primary usage of the platform is the deployment of interactive development environments (IDE), such as RStudio, Jupyter, or VSCode. These IDEs come equipped with the latest kernels of major open-source programming languages commonly employed by public statisticians (R, Python, Julia), as well as an extensive collection of packages commonly used in data science for each language. In order to ensure that services remain up-to-date and consistent between them, we maintain our own stack of underlying Docker images and rebuilt it weekly. The stack of image is fully open-source and can thus be reused outside of Onyxia<sup>9</sup>.

As discussed in previous sections, the persistence layer of these interactive environments is mainly carried out by MinIO, Onyxia's default object storage solution. As it is based on a standardized REST API, files can be easily queried directly from R or Python using high-level packages. This in itself is an important step of ensuring reproducibility: the input files of a project are not mounted manually and

<sup>9</sup> <https://github.com/InseeFrLab/images-datascience>

then specified via paths adherent to a specific infrastructure and filesystem. Rather, files are specified as HTTP queries, making the overall structure of projects much more extendable. In our experience, the object-storage paradigm covers very well the needs of most statistical projects we accompany. However, additional database services such as PostgreSQL and MongoDB are available for applications with specific needs, such as those requiring online transaction processing (OLTP) capabilities or document-oriented storage.

As Onyxia was developed to allow experimentation with big data sources and machine learning methods, we also provide services optimized for scalability. For instance, frameworks like Spark and Trino that enable to perform distributed computations within Kubernetes. These services come pre-configured to integrate seamlessly with S3 storage, thus facilitating building integrated and efficient data pipelines.

Beyond mere experimentation, our goal is to empower statisticians to transition from trial phases to production-ready projects. In line with principles from the DevOps approach, this involves facilitating the deployment of prototypes and their continuous improvement over time. To this end, we provide a set of open-source tools aimed at automatizing and industrializing the process of deploying data-intensive applications (ArgoCD, Argo-Workflows, MLFlow). For projects leveraging machine-learning models, statisticians can serve their models through APIs, deploy them using the aforementioned tools, and manage their lifecycle using an API manager such as Gravitee. Section 4 will delve into how these tools, particularly MLFlow, have been instrumental in putting machine learning models in production at Insee, in accordance with MLOps principles.

In section 3.2, we stressed that one of Onyxia's fundamental design principle was to avoid vendor lock-in. In line with this idea, organizations that implement Onyxia are at liberty to customize catalogs to suit their specific requirements, or even opt to construct their own catalogs independent of Onyxia's default offerings. This flexibility ensures that organizations are not confined to a single solution or provider, and can adapt the platform to their evolving needs.

### **3.4 Building commons : an open-source project and an open-innovation platform**

As a fully open-source initiative, the Onyxia project aims at building "knowledge commons" by promoting and building software that can be easily reused in official statistics and beyond [37]. This concerns first of all the components on which Onyxia are based: both its constitutive technological bricks (Kubernetes, MinIO, Vault) as well as all the services from the catalog are open-source. But more crucially, all the code of the project is available openly on GitHub<sup>10</sup>. Alongside an in-depth documentation<sup>11</sup>, this greatly facilitates the potential for other organizations to create


---

<sup>10</sup> <https://github.com/InseeFrLab/onyxia>

<sup>11</sup> <https://docs.onyxia.sh/>



instances of data science platforms built upon the Onyxia software and tailor it to their respective needs (see figure 7). This enabled the project to attract a growing community of contributors from official statistics (Statistics Norway), NGOs (Mercator Ocean), research centres and even industry, thus transitioning progressively towards a more decentralized governance of the project. In the next years, the involvement of NSIs from the European Statistical System is expected to increase as Onyxia was chosen as the reference data science platform in the context of the One-Stop-Shop for Artificial Intelligence/Machine Learning for Official Statistics (AIML4OS).

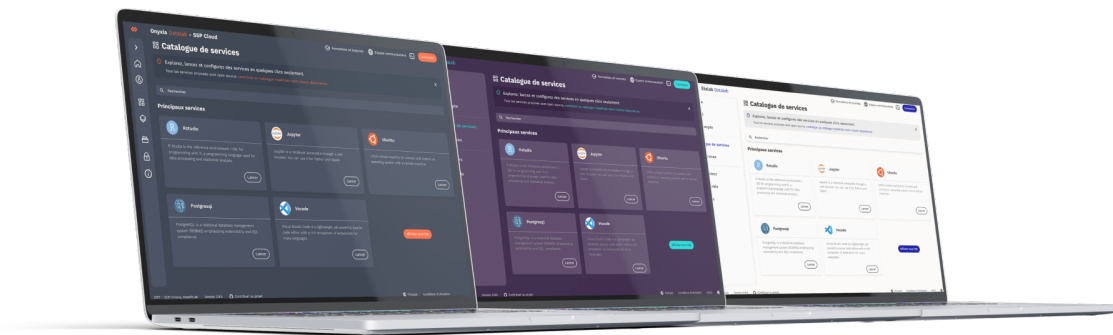

**Fig. 7** One project, multiple instances: the UI is adaptable to the graphic identity of the organization

Another major way in which we try to build commons is by developing and maintaining a showcase instance of the Onyxia project, the SSP Cloud[6]. This platform, equipped with extensive and scalable computational resources<sup>12</sup>, is designed to be a sandbox for experimenting with cloud technologies and new data science methods. The full catalog of services of Onyxia is available on the platform, enabling motivated users to go beyond mere experimentation by producing "proof of concepts", with full autonomy regarding the configuration and orchestration of their services.

Beyond its technical capabilities, the SSP Cloud is an endeavour at embodying the principles of open-innovation[5]. Deployed on internet<sup>13</sup>, it is open not only to Insee employees, but also more broadly to the whole French governmental agencies and also European NSIs, and will serve as an official sandbox for the One-Stop-Shop program of the ESS described above. As a result, the platform is now widely used in the French National Statistical System and even beyond, with about 800 unique users per month. These users form a dynamic community which, through the use of a centralized discussion canal, help improve the user experience by reporting bugs and suggesting new features, or even directly contribute to the open-source project. The fundamentally collaborative nature of the SSP Cloud has proven especially beneficial

<sup>12</sup> On the physical side, the SSP Cloud consists in a Kubernetes cluster of about 20 servers, for a total capacity of 10 TB of RAM, 1100 CPUs, 34 GPUs and 150 TB of storage.

<sup>13</sup> <https://datalab.sspcloud.fr/>

for organizing to host innovative events such as hackathons - both at the national and international level - and in academic settings. It has become an integral resource for several universities and Grandes Ecoles in France, fostering the use of cloud-native and reproducible environments, and preventing there again a vendor lock-in effect due to the over-reliance of education organizations on proprietary cloud solutions. Finally, the SSP Cloud plays a significant role in valorizing open data, particularly as it highlights and makes use of the growing abundance of datasets openly published by various statistical agencies.

## **4 Case-study : deploying a machine learning model in production following MLOps principles**

This chapter aims, through a concrete example, to illustrate how Insee managed to deploy its first machine learning (ML) model into production. It will delve into the MLOps approach that this project strived to adhere to as much as possible, focusing on the various technologies that were employed. In particular, we will highlight how cloud technologies were instrumental in building a solution iteratively and how Onyxia greatly facilitated this process by providing flexible development environments. The entire project is available in open source<sup>14</sup> and remains under active development.

### **4.1 Motivation**

Coding tasks are common operations for NSOs and can sometimes be challenging due to the size of nomenclatures. At Insee, a sophisticated coding tool called Sicore was developed in the 1990s to perform various classification tasks. It consists in a coding engine containing a large number of deterministic rules which identify ground-truth labels. Each input label goes through these rules and when a ground-truth label is recognized, the associated code is assigned. When the label is not recognized, it must be manually classified by an Insee agent.

Two main reasons drove the experimentation of new coding methods. Firstly, there was an internal change with the redesign of the Sirene registry, which lists all companies in France and assigns them a unique identifier, the Siren number, used by public institutions. The main goals of this revamping were to improve the daily management of the registry for Insee agents and to reduce waiting times for companies. Additionally, at the national level, the government launched a one-stop shop for business formalities, allowing more flexibility for business owners in describing their main activities. Initial testing exercises revealed that Sicore was no

---

<sup>14</sup> <https://github.com/orgs/InseeFrLab/teams/codification-ape/repositories>

longer the suitable tool for performing NACE classification, as only 30% of the input data were being automatically coded.

Three stakeholders were involved in this project: the *business team*<sup>15</sup> responsible for managing the Sirene registry, the *IT team* developing software related to the registry’s operation, and the *innovation team* responsible for implementing the new coding tool. The latter team is the Insee Lab, which was created in 2017 with the objective of providing support to other teams on innovation topics to streamline their various projects.

## 4.2 Project details

The project we are describing is a standard NLP classification problem. Starting from a textual description of the activity, we want to predict the associated class in the NACE Rev. 2 nomenclature. This nomenclature has the particularity of being hierarchical and contains 5 different levels<sup>16</sup>: section, division, group, class, and subclass. In total, 732 subclasses are included in the nomenclature, which is the level at which we aim to perform the classification. Table 1 provides an example of this hierarchical structure.

Level	NACE Title	Size
Section H	Transportation and storage	21
Division 52	Warehousing and support activities for transportation	88
Group 522	Support activities for transportation	272
Class 5224	Cargo handling	615
Subclass <b>5224A</b>	<b>Harbour handling</b>	<b>732</b>

**Table 1** NACE Nomenclature

With the establishment of the one-stop shop, business owners now describe their activity description with a free-text field. As a result, the new labels are very different from the harmonized labels that were previously received. Therefore, it was decided to work with ML models, as they have proven their effectiveness on such tasks in the literature. This represents a significant paradigm shift from Insee’s perspective, as ML was not traditionally used in the actual production of official statistics. Besides, the perspective of putting the new model in production was considered from the outset, guiding numerous methodological and technical choices. As such, several points had to be agreed upon to facilitate coordination among the various stakeholders, and several strategic choices had to be made from the outset, including the methodology, the choice of a development environment, and collaborative work methods.

<sup>15</sup> We refer to the business team, the team that has business knowledge i.e. who knows the NACE perfectly.


<sup>16</sup> Actually, there are 5 different levels in France but only 4 at the European level.

### 4.2.1 Methodology

When it came to selecting the methodology to adopt, we had to navigate through various constraints, with the most significant being the need for deployment on our production servers. Our model had to be lightweight enough to run efficiently on these servers, while also minimizing the computational resource overhead to ensure swift inference. Additionally, the model had to be compatible with a different language than the one it was trained, namely Java, utilized on our production servers. This proved particularly challenging throughout our project, as it influenced our data preprocessing choices, necessitating simplicity wherever possible. We had to meticulously replicate the data processing performed in Python during training, thereby limiting the use of certain packages. Ultimately, each decision made had to ensure the model's compatibility and efficiency within a production environment while minimizing compromises on inference quality.

These constraints led us away from the most powerful language models at the start of the project, such as Transformer models, and instead directed us towards simpler natural language models. Specifically, we opted for the fastText model [18]. This choice was driven by its ability to address all previously mentioned constraints. The fastText model is incredibly fast to train, even from scratch, and inference doesn't require a GPU to be extremely rapid. Moreover, there exists a wrapper that enables reading fastText models in Java, which could be utilized by the IT teams on their machines, greatly facilitating the deployment of our models. Unfortunately, this wrapper, available on GitHub, is no longer maintained, posing serious security concerns, and thus became a temporary default choice for us. In addition to these technical arguments, the decision to use the fastText model was justified from a methodological standpoint. Firstly, the Insee Lab teams had already completed several projects using the fastText model, leveraging the acquired knowledge to achieve initial results very quickly. While it may not have been a state-of-the-art language model, for our use case, the model yielded excellent performance results which, considering the time and human resource constraints, were more than sufficient to enhance the existing process. Finally, the model is inherently simple methodologically speaking, greatly simplifying communication and adoption within the various Insee teams.

The supervised classification model fastText relies on both a bag-of-words model to obtain embeddings and a classifier based on logistic regression. The bag-of-words approach involves representing a text as the set of vector representations of each of its constituent words. Thus, the embedding of a sentence depends on the embeddings of its words, for example, their sum or their average. In the case of supervised text classification, the embedding matrix and the classifier's coefficient matrix are learned simultaneously during training by gradient descent, minimizing an usual cross-entropy loss function. The specificity of the fastText model lies in embeddings being performed not only on words but also on word n-grams and character n-grams, providing more context and reducing biases due to spelling mistakes. The fastText model can be summarized by the Figure 8

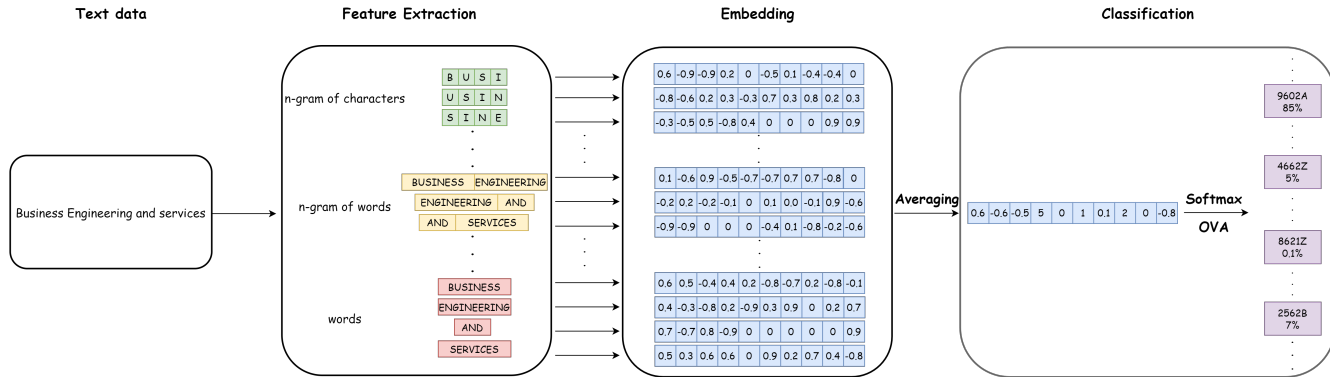

**Fig. 8** Simplified architecture of the fastText model

#### 4.2.2 Development environment

In a ML project, the choice of a flexible development infrastructure is paramount. First, due to the diversity of tasks to be performed — data collection, preprocessing, modeling, evaluation, inference, monitoring, etc. Second, because machine learning is a fast-evolving field. It is thus preferable to build a ML app as a collection of modular components so as to be able to update components without disrupting the entire pipeline. In order to leverage the flexibility of cloud technologies, the Onyxia project — and in particular its open-innovation instance, the SSP Cloud — was chosen as the main development environment. This projects also illustrates the richness of Onyxia’s catalog of services, as we used a variety of tools for each stage of our pipeline: MinIO, Vault, MLflow, ArgoCD, Argo Workflows, Label Studio. The decision to opt for the SSP Cloud was also motivated by the ongoing implementation of a private instance of Onyxia on the production servers at Insee. This initiative is poised to streamline the connection between production and development environments in the long run. Finally, this project relied exclusively on open-data and thus complied with the open policy of the SSP Cloud.

#### 4.2.3 Enforcing best development practices

From the very onset of this project, the target was to go beyond mere experimentation and put the model in production as soon as possible. Consequently, we strived to enforce best development practices from the very beginning of the project. All the development was versioned with Git and put in open-source on GitHub<sup>17</sup>. In terms of code quality, we tried to comply to community standards, e.g. using formatters such as Ruff. Scripts were favored over notebooks in order to favor a modular package-like

<sup>17</sup> <https://github.com/InseeFrLab/teams/codification-ape/repositories>

structure for the project which is much better suited to the integration into automated data transformation and ML pipelines.

## 4.3 What is MLOps?

### 4.3.1 Specificities of ML projects


In the landscape of ML projects, there are new considerations and challenges compared to traditional statistical projects. These new challenges stem from the complex nature of ML models, their iterative development process, and the need for automation and scalability. Among others, here are some key aspects in ML projects:

1. **Logging Parameters:** ML models often have numerous hyperparameters and configurations that significantly impact their performance. It's crucial to log these parameters along with model training and evaluation metrics to ensure reproducibility and traceability. This logging allows for better understanding of model behavior and facilitates debugging and optimization efforts.
2. **Optimizing Hyperparameters:** Tuning hyperparameters is a critical step in optimizing the performance of ML models. Unlike traditional statistical models where parameters are often predefined, ML models typically have a larger number of hyperparameters that need to be optimized. This process requires sophisticated techniques such as grid search, random search, or Bayesian optimization, which can be computationally intensive and time-consuming.
3. **Model Versioning:** ML models are highly iterative. Therefore, effective version control mechanisms are essential to track changes, compare performance across different model versions, and roll back to previous versions if necessary. While model versioning may also be relevant for traditional statistical models, it is infrequently practiced. In ML projects, however, it is considered mandatory due to the iterative nature of model development and the dynamic nature of data and algorithms.
4. **Model Deployment:** Deploying ML models into production environments presents unique challenges due to their complexity and resource requirements. Ensuring seamless deployment involves considerations such as containerization, scalability, latency, and harmonization with preexisting systems.
5. **Model Monitoring:** Once deployed, ML models need to be continuously monitored to detect performance degradation, concept drift, or other anomalies. Unlike traditional statistical models, ML models can exhibit unexpected behavior over time due to changes in data distribution or underlying patterns. Implementing robust monitoring solutions involves tracking model performance metrics and data quality to ensure ongoing reliability, effectiveness and to trigger model retraining.
6. **Model Retraining:** Regular retraining of ML models stands as an imperative to maintain their effectiveness over time. Shifts in data distribution, variations in data quality, or evolving business imperatives may necessitate the recalibration of models to preserve accuracy and relevance.

7. **Data Annotation:** The process of data annotation assumes paramount importance in the context of ML, where labeled datasets serve as the foundation for model training and validation. Data annotation involves the manual or automated labeling of raw data with descriptive metadata, facilitating the development of supervised learning models. Data annotation directly influences the performance and generalizability of ML models.
8. **Explainability:** The interpretability of ML models is important for building trust and understanding their predictions.

#### 4.3.2 From DevOps to MLOps

The MLOps approach is built upon the foundations of the DevOps approach. In this sense, it can be considered simply as an extension of DevOps, developed to address the specific challenges related to managing the lifecycle of ML models. MLOps incorporates the principles of collaboration and automation inherent in DevOps but also considers all aspects related to data and ML models.

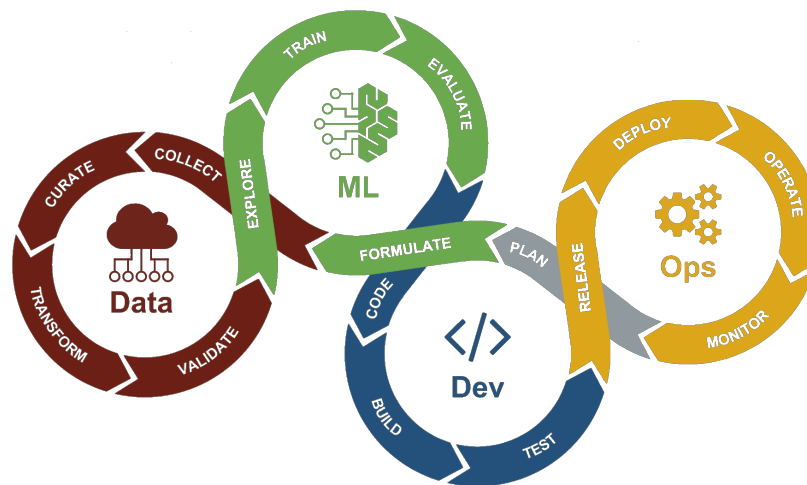

**Fig. 9** Machine Learning lifecycle. Credits: Satish Chandra Gupta

MLOps involves the automation of tasks such as data management, tracking model versions, their deployments, as well as the continuous evaluation of model performance in production. Similar to DevOps, MLOps emphasizes close collaboration between business units and IT teams on one hand, and data science teams on the other. This collaboration is key to ensuring effective communication throughout the lifecycle of the ML model.

### 4.3.3 MLOps Principles

The pillars of MLOps[20] are generally defined as :

- **Reproducibility:** The results of every experiment, successful or unsuccessful, should be reproducible at no cost. This implies first and foremost a certain rigor in managing packages, environments, system libraries, code version control, etc. Additionally, the various variables influencing model training (training data, hyperparameters, etc.) must be versioned with the model.
- **Automation:** To foster feedback loops of continuous improvement, the model life-cycle (testing, building, validation, deployment) must be automated to the fullest extent possible. Tools derived from the DevOps approach, especially continuous integration and continuous deployment (CI/CD), should be leveraged.
- **Collaboration:** MLOps values a culture of collaborative work around ML projects, where communication within teams should reduce siloed work. On a technical level, MLOps tools used should facilitate collaborative work on data, model, and code used by the project.
- **Continuous Improvement:** Once deployed, it is essential to ensure that the model performs as expected by evaluating its performance on real data using continuous monitoring tools. In case of performance degradation over time, periodic retraining or continuous training of the model should be considered.

Tackling these challenges and effectively managing the lifecycle of a ML project necessitates specialized tools, many of which are accessible as open-source solutions. Throughout our project, we aimed to embrace the MLOps approach by utilizing software applications grounded in cloud-native technologies and available in the SSP Cloud catalog. This enables data scientists to be autonomous from model training to deployment.

## 4.4 MLflow as the cornerstone of the project

During this project, we heavily relied on MLflow, a platform designed to streamline the lifecycle of ML models. It allows for detailed tracking of various experiments, packaging of code to ensure reproducibility, and serving models to end-users. MLflow also features an API that is compatible with most ML libraries such as PyTorch, Scikit-learn, XGBoost, and supports multiple programming languages including Python, R, and Java. It incorporates various functionalities that facilitate the adoption of the MLOps approach.

There are numerous tools available for orchestrating tasks and data pipelines. Among the most popular (based on their GitHub stars) are Airflow, Luigi, Argo Workflows, Prefect, Kubeflow and BentoML. It's difficult to assert whether one is better to another; in reality, your choice largely depends on your IT infrastructure and project requirements. In our case, we opted to use MLflow for its ease of use and suitability for ML projects. Additionally, it is available in the SSP Cloud catalog,



simplifying its installation process and its connection with our MinIO storage where all the artifacts are automatically stored.

#### 4.4.1 MLflow Projects

MLflow offers a format for packaging data science projects to promote code reuse and reproducibility. This format is simply called MLflow Project. Essentially, an MLflow project is nothing more than a directory containing the code and necessary resources (data, configuration files, etc.) for executing your project. It is summarized by an ‘MLproject’ file listing the various commands to execute a pipeline as well as the necessary dependencies. In general, an MLflow project has the following structure:

```
Project_ML/
├── artifacts/
│   ├── model.bin
│   └── train_text.txt
├── code/
│   ├── main.py
│   └── preprocessing.py
├── MLmodel
├── conda.yaml
├── python_env.yaml
├── python_model.pkl
└── requirements.txt
```

#### 4.4.2 MLflow Models

In addition to packaging a project, MLflow also allows you to package your model, regardless of the underlying ML library used<sup>18</sup> (among those compatible with MLflow, i.e., all the libraries you use!). Thus, two models trained with different libraries, say PyTorch and Keras, can be deployed and queried in the same way thanks to this layer added by MLflow. This harmonization becomes particularly valuable as you begin to accumulate various types of models, as it eliminates the need to modify your inference pipeline every time you introduce a new model type.

#### 4.4.3 Tracking Server

MLflow provides a tracking server that includes both an ergonomic graphical interface and an API for logging various parameters, metrics, files, etc. during the training of your ML model. The tracking server is very useful for comparing the different

---

<sup>18</sup> You also have the capability to package our own custom model. This is precisely what we do to integrate our fastText model into MLflow.

experiments you have performed, storing them, and also being able to reproduce them. Indeed, each run stores the source of the utilized data along with the corresponding commit. When combined with MLflow Project, this capability enables the reproduction of every conducted run.

#### 4.4.4 Model Registry

Once different experiments have been conducted and models that satisfy us have been selected, it is time to move on to the next step in the model lifecycle. Indeed, the chosen model must then be able to move into a production or pre-production environment. However, knowing the state of a model in its lifecycle requires very rigorous organization and is not so straightforward. MLflow has developed a feature that simplifies this version management of models through its Model Registry. This registry allows you to add tags and aliases to your models to define their position in their lifecycle and thus be able to retrieve them efficiently.

In general, a ML model goes through 4 stages that need to be known at all times:

1. **Experimental**
2. **Staging**
3. **Production**
4. **Archived**

#### 4.4.5 MLflow in short

MLflow is an open-source project that provides a platform for tracking the lifecycle of a ML model from start to finish. It is not the only available tool, and it may not be the most suitable for some of your specific projects. However, we believe it offers several advantages, primarily its ease of use and its ability to meet the needs of the MLOps approach. It is important to keep in mind that this environment is still very new, and new open-source projects emerge every day, so it is necessary to stay up to date on the latest developments. In summary, MLflow allows you to:

- Simplify tracking the training of ML models through its API and tracking server.
- Integrate the main ML frameworks easily.
- Integrate your own framework if needed.
- Standardize your training script, enabling industrialization, for example, fine-tuning hyperparameters.
- Package your models for easy and harmonized querying across different frameworks.
- Store your models efficiently by assigning tags and facilitating lifecycle tracking.

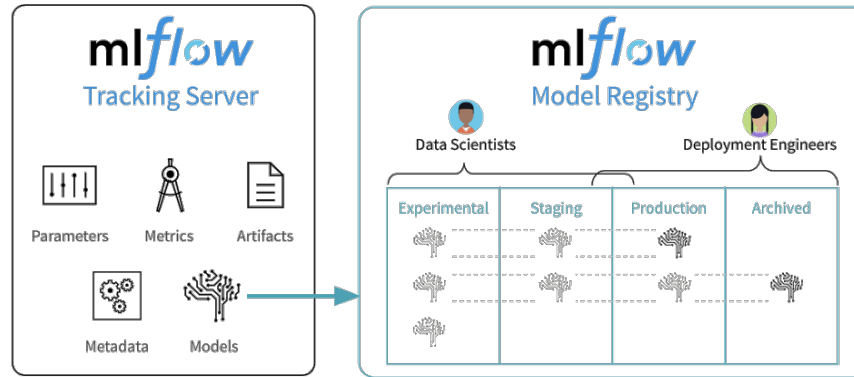


Fig. 10 TODO

#### 4.5 Embracing the potential of Onyxia from training to deployment

To adhere closely to the MLOps approach, we strived to automate as much as possible the various stages of the ML model lifecycle. In the "automation" section of the SSP Cloud catalog, several services are available in addition to MLflow, including Argo CD and Argo Workflows, which we use in a daily basis for various applications.

Argo Workflows is an open-source container-native workflow engine designed for orchestrating parallel jobs on Kubernetes. It allows users to define complex multi-step workflows as code using YAML or JSON, simplifying the automation and management of tasks in a Kubernetes environment. The idea is to define workflows where each step of the process is a completely isolated container to ensure reproducibility. This allows for easy parallel execution of compute-intensive tasks for model training or data processing. In our case, we use it during the model training phase, particularly to optimize the various hyperparameters of our models. Instead of performing a grid search that would test all possible combinations in a single container, Argo Workflows creates as many containers as there are model combinations to train, with each container handling the training of a single model. Kubernetes optimizes resources within the cluster, and since we have configured MLflow in our code, all models and their metrics appear on the Tracking Server. It then becomes straightforward to compare the different trained models and select the best one using the comparison and visualization tools available on the UI.

It is worth noting that it is relatively simple to make all these applications (Argo Workflows, MLflow, MinIO) communicate with each other with just a few configuration files because everything is well set up initially thanks to the Onyxia software. Without Onyxia, even the installation of these softwares would have been challenging.

The use of tools like Argo Workflows is highly recommended for ML projects, firstly because they rely on technologies that promote reproducibility (containers), but also because they encourage viewing projects as a series of independent steps


ranging from data retrieval to result dissemination via modeling. Adopting a pipeline-based approach to your ML or statistics projects is the first step toward greater reproducibility.

Once you have optimized, evaluated, and selected your best-performing model, it's crucial to make it available to other users. Unfortunately, this aspect is often overlooked by data scientists. A trivial way to share the model would be to provide your code and all necessary information to a third party to retrain your model on their own. Obviously, this approach is not optimal as it assumes that all users have the resources, infrastructure, and knowledge required for training. The goal is therefore to make your model available in a simple and efficient manner. The use of the SSP Cloud platform greatly simplifies this process and has also allowed us, as data scientists, to take control of our model until its deployment without relying on the IT team. Indeed, on the platform, it is possible to open services with Kubernetes administrator rights, enabling the deployment of applications. For making our ML model available, we opted to use a REST API. This seems to be the most suitable method in the vast majority of cases, as it meets several criteria:

- **Simplicity:** REST APIs provide an entry point that can hide the underlying complexity of the model, making its availability easier.
- **Standardization:** One of the main advantages of REST APIs is that they are based on the HTTP standard. This means they are language-agnostic, and requests can be made in XML, JSON, HTML, etc.
- **Modularity:** The client and server are independent. In other words, data storage, user interface, or model management are completely separated from the server.
- **Scalability:** The separation between the server and client allows REST APIs to be highly flexible and facilitate scalability. They can adapt to the load of concurrent requests.

To develop our API, we used the popular Python library FastAPI, which is relatively easy to use and comes with exhaustive documentation. The idea is to encapsulate all the API code and required software dependencies into a Docker image so that it can be deployed in a container on the Kubernetes cluster. Upon startup, the API will automatically retrieve the correct model from the MLflow model registry, which is located in a MinIO bucket. Using a MLflow model allows automatic integration of preprocessing before each prediction, regardless of the model framework used, greatly simplifying inference and ensuring streamlined code in the API. The model deployment process is summarized in Figure 11.

At this stage, we are already adhering to several MLOps principles in terms of reproducibility through containers and model versioning with MLflow. However, when it comes to automation, there is room for further improvement. Imagine you have deployed an API, and in the meantime, you have developed a new feature for it. For this new feature to be effectively integrated into your API, it is necessary to redeploy the new version of your API and remove the currently deployed one. The idea is to automate the creation of a new Docker image as soon as your API code is updated, and a container based on this latest image automatically deploys the new version of your API. To achieve this on the SSP Cloud, there is the ArgoCD

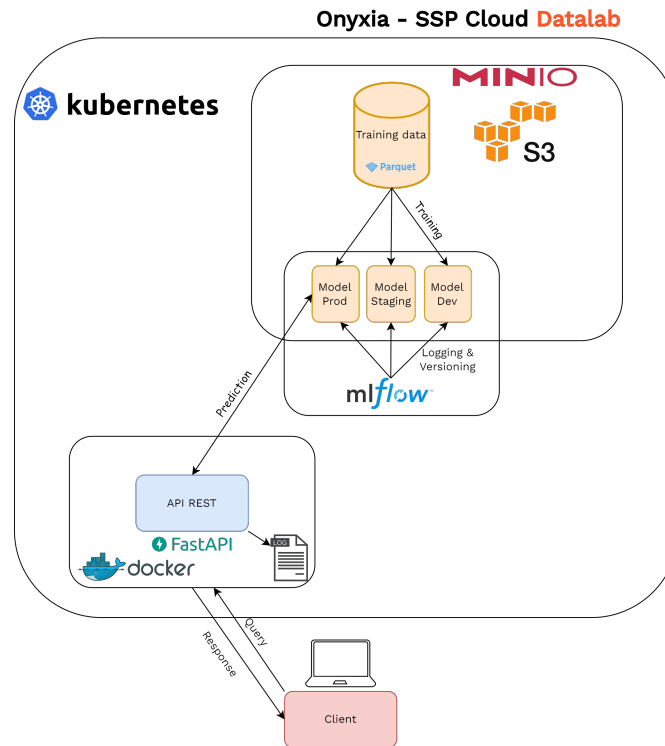


**Fig. 11** Deploy a ML model via an API

service - CD for Continuous Deployment. ArgoCD continuously scans your Github repository, and as soon as it detects a change in the API code or in the version of the model to be used, it automatically deploys your API by communicating with the Kubernetes cluster. In reality, this process is a bit more nuanced. ArgoCD does not scan your entire repository but only a few configuration files that indicate the versions of the Docker image to use and the model to deploy. To create a new version of the Docker image as soon as the API code is modified, we use the Github Actions feature of Github<sup>19</sup>. This deployment automation pipeline is depicted in Figure 12.

The autonomy of the data scientist up to the deployment of the model is particularly effective in terms of organization. Indeed, thanks to the deployment of an API or the transmission of a Docker image, transitioning the model to production is facilitated. On the IT side, querying an API is a common task, and no knowledge of ML is required to perform it.

Our MLOps architecture on the SSP Cloud platform was developed incrementally, capitalizing on the platform's modularity. Following the initial deployment of our model, we sought to introduce various enhancements to our architecture, each of which could be integrated independently. This allowed us considerable freedom in

<sup>19</sup> An equivalent feature also exists under Gitlab, called Gitlab CI.

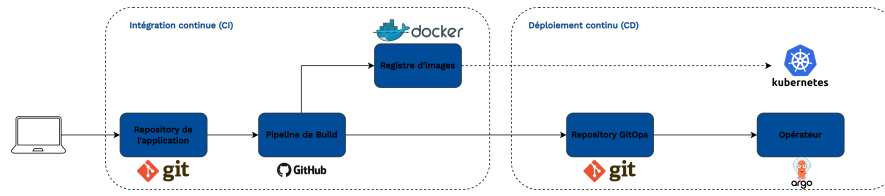

**Fig. 12** Implementation of CI/CD with Kubernetes

selecting our technological solutions. As a result, questions about monitoring the model in its production environment emerged in a subsequent phase.

## 4.6 Monitoring of the model

### 4.6.1 The importance monitoring

Once the modeling phase has been completed, along with training, optimization, and deployment of the model to be accessible to users, it's crucial to understand that the data scientist's responsibilities extend further. Traditionally, the responsibility of the data scientist is often limited to selecting the model to deploy, with the deployment task then delegated to data engineers. However, once in production, the model has not yet reached the end of its lifecycle, and it must be continuously monitored to prevent undesirable performance degradation.

The various components of MLOps, namely data (DataOps), models (ModelOps), and code (DevOps), add complexity to the lifecycle of a ML model by involving multiple stakeholders. Generally, three main actors are involved:

- Data scientists/data engineers
- IT teams
- Business teams

Sometimes, data scientists are integrated into business teams and data engineers into IT teams to foster better collaboration. This approach aims to streamline skills, unify terminologies, and align project objectives. In any cases, effective communication remains essential to ensure proper management of the lifecycle of a ML model, particularly concerning monitoring its behavior in a production environment. Continuous monitoring of the deployed model is extremely important to ensure the conformity of results to expectations, anticipate changes in data, and iteratively improve the model. The monitoring is a crucial element of the MLOps approach.

The concept of monitoring can take on different meanings depending on the context of the involved team. For IT teams, it primarily involves verifying the technical validity of the application, including aspects such as latency, memory consumption, or disk usage. Conversely, for data scientists or business teams, the focus is more on methodological monitoring of the model. However, real-time tracking of the perfor-

mance of a ML model is often a complex task, given that ground truth is usually not known at the time of prediction. Therefore, it is common to use proxies to detect any signs of performance degradation. Two main types of degradation of a ML model are generally distinguished: data drift and concept drift.

- **Data drift:** Data drift occurs when the data used during inference in production exhibits significant differences compared to the data used during training, that is,  $\mathbb{P}_{train}(X) \neq \mathbb{P}_{inference}(X)$ .
- **Concept drift:** Concept drift is evoked when a change in the statistical relationship between the features ( $X$ ) and the target variable ( $Y$ ) is observed over time, that is,  $\mathbb{P}_{train}(Y|X) \neq \mathbb{P}_{inference}(Y|X)$  and  $\mathbb{P}_{train}(X) = \mathbb{P}_{inference}(X)$ .

#### 4.6.2 What do we monitor ?

In our use case, our objective is to achieve the highest number of correctly classified textual description while minimizing the number of textual description requiring manual intervention. Thus, our goal is to distinguish correct predictions from incorrect ones without prior access to ground truth. To accomplish this, we have developed a confidence index, which represents the difference between the two highest scores. Therefore, for a given textual description, if the confidence index exceeds a determined threshold, the textual description is automatically coded. Otherwise, the textual description is manually coded by an Insee's agent who has access to the five most probable codes according to the model to optimize manual intervention. Defining the threshold for automatic coding of textual descriptions is crucial in production deployment. It involves making trade-offs between achieving a high automatic coding rate and preserving model performance, and vice versa.

To monitor the behavior of our model in production, we have developed an interactive dashboard that enables visualization of several metrics of interest for the business teams. Among these metrics are the number of requests per day and the rate of automatic coding per day based on a given confidence index threshold. This visualization allows business teams to understand the rate of automatic coding they would have obtained if they had chosen different thresholds. It is also possible to visualize the distribution of obtained confidence indices and to compare two temporal windows to determine if there are changes in the distributions of predictions returned by the model<sup>20</sup>.

Confidence indices can be analyzed at finer levels of granularity based on the aggregation level of the nomenclature, to determine which classes are most difficult to predict and which have more or less occurrences. Another part of the dashboard focuses more on the input data of the model and details, for example, the average number of words per textual description, the average number of sentences per textual description, as well as the most frequent words, etc.

---

<sup>20</sup> To compare distributions, you need to calculate the distances between them using, for example the Bhattacharyya distance, the Kullback-Leibler divergence, the Hellinger distance or to perform statistical tests such as the Kolmogorov–Smirnov test, or the  $\chi^2$ -test.

### 4.6.3 How to implement a monitoring system in the SSP Cloud?

Although there are several solutions for monitoring ML models such as Evidently or Sifflet, we preferred to implement our own solution. Indeed, at the time of our trials, none of the open-source solutions available on the market seemed optimal to us. However, the field of monitoring ML models is still emerging and actively developing, so the statements made today may no longer be true at the time of reading these lines. Before opting, as we did, for an internal solution, we recommend exploring the available tools first.

In our case, we chose to use tools that we already mastered and that seemed suitable for our problem. We thus used DuckDB for optimized management of our data and the Dashboard feature of Quarto for creating the interactive dashboard.

First, to monitor in real-time the activities of your API, it is essential to integrate logs, whether to monitor technical or methodological aspects. We made the decision, which may be subject to debate, to include *business information* such as the output code and its corresponding confidence index in the API logs. The objective was to be able to build our dashboard based on the logs returned by the API. To exploit these logs, we set up a kind of Extract-Transform-Load (ETL) process in Python, which retrieves the API logs and transforms them into partitioned parquet files exploitable by the dashboard. Ideally, we would have preferred to rely on a tool capable of performing this parsing natively and more structured than us. Parseable could have been such a solution, but unfortunately, it was not installable on the SSP Cloud for technical reasons. We then use Quarto and its Dashboard feature to create an interactive dashboard. The various metrics present in the dashboard are calculated by making SQL queries directly on our parquet files with DuckDB. The dashboard is deployed in the same way as our API, that is, in a container based on an image that is automatically built via Github Actions as soon as the code associated with the dashboard is modified. Figure 13 depicts the setup of our monitoring system, highlighting the various technologies employed.

In summary, our monitoring pipeline consists of:

1. Including *business logs* in the API for every request.
2. Utilizing ArgoCD to schedule a nightly ETL job, generating partitioned parquet files stored on MinIO.
3. Employing ArgoCD for continuous deployment, where the dashboard dynamically retrieves data from the parquet file via DuckDB, computes metrics, and offers interactive visualization.

## 4.7 Continuous Annotation

In all ML projects, it is well-established that data is key, and in supervised ML problems, annotations play a crucial role in model performance. At the project's onset, time constraints compelled us to swiftly achieve results, precluding the luxury



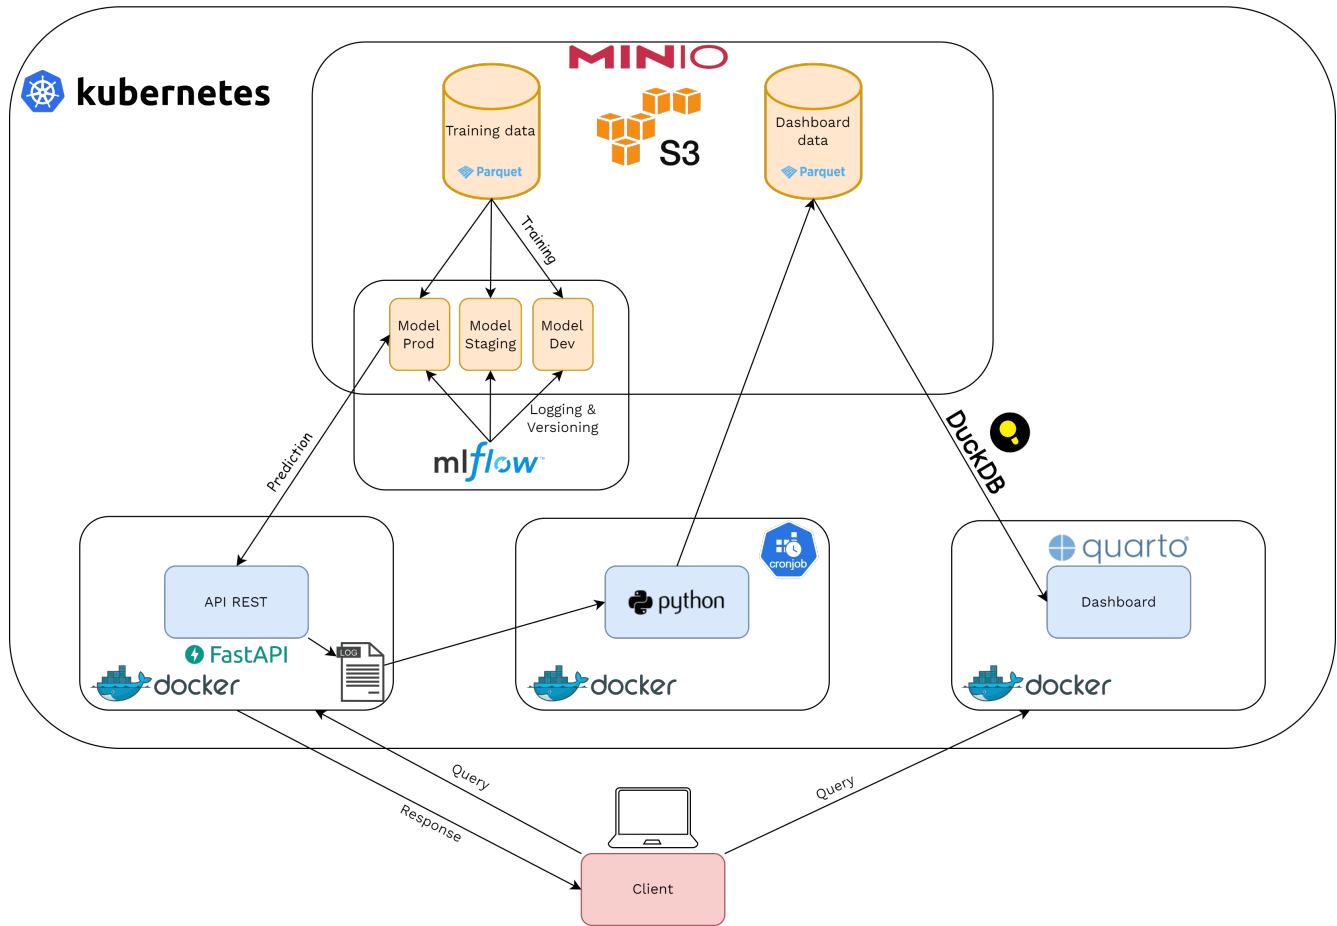
Onyxia - SSP Cloud **Datalab**

Fig. 13 TODO

of conducting a comprehensive annotation campaign. Consequently, we never had access to a truly annotated gold-standard test sample on which we could rely 100%. To evaluate the performance of our model, we relied on a subset of our training dataset (test/train split), knowing that its labeling was not perfect. After several months of model deployment, it became imperative to build such a gold-standard test sample. Firstly, this sample allows us to have an unbiased view of the model's performance in production on real data, particularly on data that has been automatically coded. Additionally, this sample enabled us to identify and correct inconsistencies present in our initial training dataset.

Convincing the business teams of the significance of annotation proved challenging, as they were reluctant to reallocate new human resources, which necessitated

specialized expertise, on a tedious task. However, the model’s increased automation in coding enabled the teams to shift their focus to annotation tasks.

Another reason that motivated the implementation of annotation campaigns is the redesign of the NACE nomenclature in 2025. From 2025 onwards, European statistical institutes will be required to use the latest version of NACE, namely NACE Rev. 2.1. This revision brings substantial changes that will require retraining a new model. For this, a new training dataset with the correct annotations is peremptory. A back-propagation work on the old training dataset is also considered to increase the size of the dataset. Thus, a dual annotation campaign was initiated in early 2024 on the SSP Cloud platform.

To carry out these annotation campaigns, we used the Label Studio service, available on the SSP Cloud. Label Studio is an open-source platform designed to facilitate data annotation. The first annotation campaign aims to create a test dataset allowing continuous evaluation of our model and improvement of the training dataset if necessary. To do this, we create a pool of text descriptions randomly sampled from the data passed through the API over the past three months. This sample is then sent to annotation by NACE experts using the UI of Label Studio. The annotation results are automatically saved on MinIO, transformed into parquet format, and then integrated into the monitoring dashboard to compute and observe various model performance metrics. The second annotation campaign is dedicated to the transition to the new version of NACE. The objective is to allocate certain experts to annotation in the new version of NACE to create a training dataset for the future model. In this revision, some codes are univocal, meaning for example that code 0112Z will become 0112Y, while others are multivocal, such as 0119Z, which can become either 0113Y or 0119Y. The challenge lies primarily with the latter, which is why, to streamline this annotation process, only the textual descriptions of multivocal codes are sent for annotation on Label Studio.

Once again, the presence of a cloud-native technology on the platform, such as Label Studio, allowed us to swiftly kickstart this annotation campaign while seamlessly integrating it with the various components of our architecture, as depicted in Figure 14.

## 4.8 What next ?

We believe that a well-designed infrastructure facilitates the adoption of MLOps principles across all stages of an ML project, automating a multitude of tasks. The SSP Cloud stands out as a fitting illustration of this concept. An important aspect of MLOps is its iterative nature: not all components can be fully integrated from the outset, and time limitations can be constraining. There are several maturity level of MLOps. Therefore, it’s advisable to begin by establishing robust development practices and gradually enriching the project with increased automation as requirements evolve. An effective initial step is to leverage tools like MLflow, which facilitate adherence to the MLOps framework.

## Onyxia - SSP Cloud Datalab

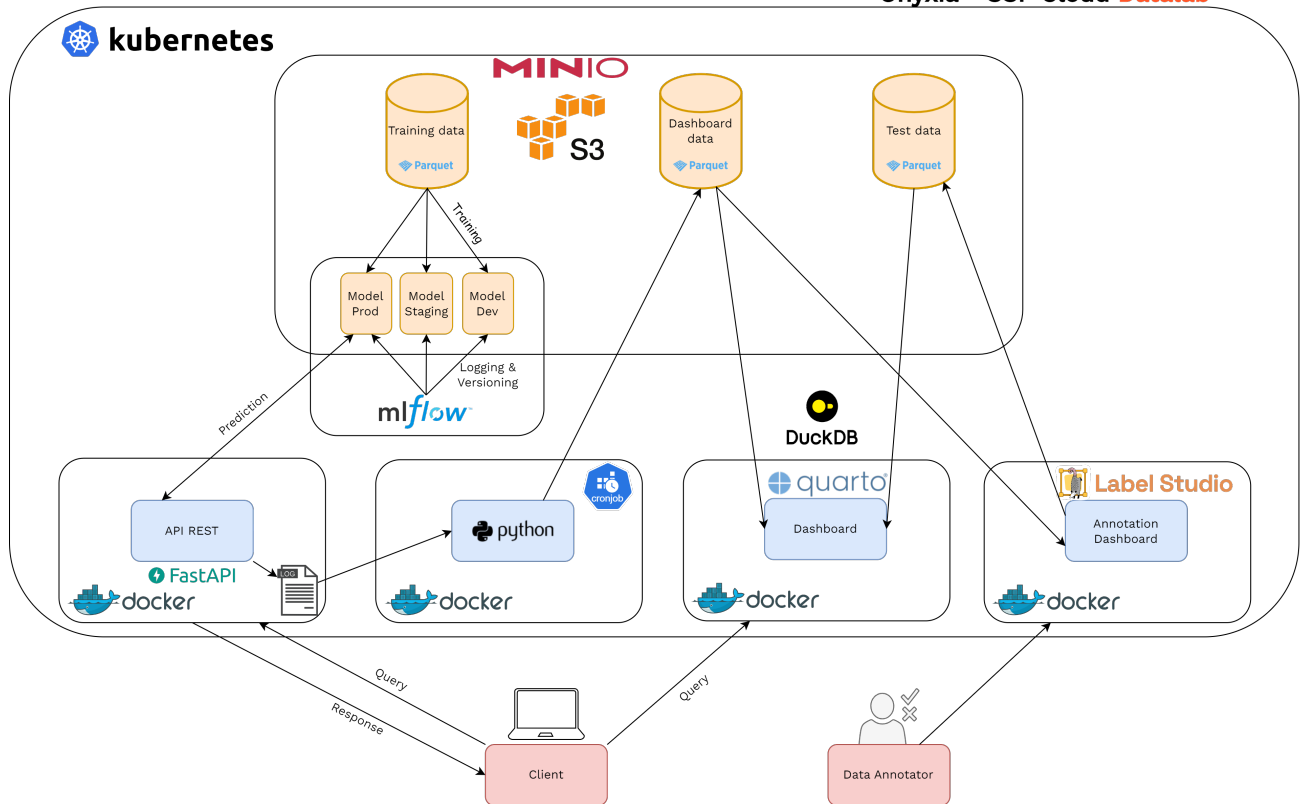


Fig. 14 TODO

We've identified various areas where we can improve our processes, which we plan to address in the near term. Our primary focus will be on automating model retraining, although this will require enhancements to our monitoring pipeline. Despite the availability of a dashboard for business teams to visualize the model's performance almost in real-time (updated nightly), we currently lack an alert system to signal when retraining is required, and there's an even more ambitious goal of automating this retraining process.

Additionally, we plan to test other methodologies for our model, especially Transformer-type models, which could soon be usable on our production servers. Finally, although this does not directly optimize our pipeline in terms of MLOps, working on the revision of NACE will be an interesting challenge and will allow us to assess the relevance of the MLOps approach we have adopted since the beginning of the project.

## 5 Discussion

### - Global evolution

Initially developed as an internal project, Onyxia has gained recognition beyond the realm of Insee or the French administration. Aware of the necessity to foster autonomy in order to leverage the full potential of data science, several organizations now have a production instance of Onyxia running, and multiple others are in the process of either testing or implementing one. Besides, the choice of Onyxia as the reference data science platform in the context of the One-Stop-Shop for Artificial Intelligence/Machine Learning for Official Statistics (AIML4OS) will further facilitate its adoption within the ESS. This trend is naturally very beneficial to the Onyxia project, as it moves from a project developed in open-source - but mainly at Insee - to a full open-source project with a growing base of contributors. This in turn facilitates its adoption by other organizations, since it gives more guarantees on its sustainability independently from Insee's strategy. The governance of the project is currently evolving to reflect this trend, for instance with the organization of monthly community calls and the creation of a public channel and roadmap for the project<sup>21</sup>.

Despite this success, we observe several limitations to the widespread adoption of the project in organizations. First, it is essential to remind that the fundamental choice made by organizations that adopt Onyxia is not the software itself, but the underlying technologies: containerization (through Kubernetes) and object storage. These technologies can represent substantial entry costs for organizations, as they demand a significant commitment to developing and maintaining competencies which are not readily found in NSOs. Yet, the general trend towards cloud-native solutions among data-centric organizations suggests a favorable shift that could mitigate these challenges over time.

Similarly, the transition towards cloud-native technologies induces entry costs for statisticians. First, they often deal with a loss of references regarding where computations actually happen: while they may be accustomed to performing computation on centralized servers rather than a personal computer, the container adds a layer of abstraction that make the location hard to grasp at first. But the major perceived change in this paradigm is the loss of data persistence. In traditional setups - either a personal computer or a server accessed through a virtual desktop - the code, the data and the computing environment are kind of mixed in a black box fashion. On the contrary, containers have no persistence by design. While object storage provides this persistence, a proper use of these infrastructures for statistical projects require a variety of tools and corresponding skills: using a version control system for the code, interacting with the object storage API to store the data, providing configuration files or secrets as inputs, etc. In a way, these entry costs can be seen as the "price" of autonomy: thanks to cloud-native technologies, statisticians now have access to scalable and flexible environments that enable them to experiment more freely, but this autonomy requires a significant skills upgrade which may be over-

---

<sup>21</sup> All information are available on the GitHub depository of the project : <https://github.com/InseeFrLab/onyxia>

whelming at first and limit adoption. However, our experience at Insee suggest that this effect can largely be mitigated through a combination of training statisticians to development best practices and accompanying statistical projects when transitioning to cloud infrastructures.

While Onyxia has significantly democratized access to cloud-native technologies for statisticians, the journey towards integrating data science within NSOs encompasses broader organizational challenges beyond the technical realm. In particular, the deployment of our first machine learning model in production highlighted

the necessity of overcoming skill compartmentalization across IT, business, and innovation teams. Effective collaboration and the seamless integration of machine learning into statistical processes require not only shared goals and methodologies but also a convergence of diverse skills and knowledge. Addressing these challenges involves strategic measures such as embedding data science capabilities within business teams for better alignment with project objectives, and initiating cross-disciplinary training to harmonize the toolsets and languages across teams. Ultimately, the successful transition to a data science-driven approach in statistical production is contingent upon a balanced strategy that marries technical solutions like Onyxia with comprehensive organizational adjustments, fostering a culture of collaboration, continuous learning, and innovation.

- Gouvernance :
- Quelle organisation ? Equipe DS centralisée qui vient en appui ou data scientists dans les orgas métiers ? Collaboration avec les équipes infos ? (cf. graphique orga/compétences de Romain)

### 5.0.1 Governance and collaboration challenges in ML Projects

During the deployment of our first model into production, we encountered several governance challenges that we had not anticipated. As explained in Section 4, we initiated the project with three distinct teams: an IT team comprised of developers, the core business team responsible for maintaining the Sirene directory, and finally, the innovation team consisting of data scientists and data engineers. The creation of the SSP Lab<sup>22</sup> at Insee in 2018 was justified to support the business teams on projects with relatively precise objectives in terms of statistical production and to experimentally introduce new methods into the statistical process, including machine learning methods. Initially, the innovation team's sole objective was to conduct an experiment and let the business team judge its relevance based on the results obtained. However, due to the urgency and quality of the results, the innovation team continued to collaborate with the business team to assist in production deployment.

This phase highlighted several issues, with the primary one being the compartmentalization of skills. The innovation team had limited knowledge of business issues and was unable to make certain decisions independently. The business team, on the other hand, had very few data science skills and was unable to manage the production

---

<sup>22</sup> Name of the innovation team.

deployment of the experiment alone. Finally, the IT team, although well-versed in DevOps best practices, had no knowledge of MLOps approach and of the methodological tools used in machine learning. Additionally, the programming languages used by the production and innovation teams were different, which have slowed down the model's production deployment. Before using MLflow and its Model Registry functionality, the preprocessing done in Python had to be reprogrammed in Java, which proved to be very tedious. We realized how code duplication was a source of errors and needed to be avoided as much as possible.

To address these challenges, several measures were implemented at Insee. Firstly, a data scientist was hired in September 2023 and integrated into the business team to take responsibility for the model in production, its monitoring, and retraining. The goal is to have someone who fully understands the business issues to quickly integrate new features as needed. Furthermore, to anticipate the arrival of multiple machine learning models in production, a Python training plan for developers was launched to enhance their skills with open-source software and align development and production languages.

## Appendix

## References

1. Daniel Abadi, Peter Boncz, Stavros Harizopoulos, Stratos Idreos, Samuel Madden, et al. The design and implementation of modern column-oriented database systems. *Foundations and Trends® in Databases*, 5(3):197–280, 2013.
2. Abdullah I Abdelaziz, Kent A Hanson, Charles E Gaber, and Todd A Lee. Optimizing large real-world data analysis with parquet files in r: A step-by-step tutorial. *Pharmacoepidemiology and Drug Safety*, 2023.
3. Afshin Ashofteh and Jorge M Bravo. Data science training for official statistics: A new scientific paradigm of information and knowledge development in national statistical systems. *Statistical Journal of the IAOS*, 37(3):771–789, 2021.
4. Ouafa Bentaleb, Adam SZ Belloum, Abderrazak Sebaa, and Aouaouche El-Maouhab. Containerization technologies: Taxonomies, applications and challenges. *The Journal of Supercomputing*, 78(1):1144–1181, 2022.
5. Henry William Chesbrough. *Open innovation: The new imperative for creating and profiting from technology*. Harvard Business Press, 2003.
6. Frédéric Comte, Arnaud Degorre, and Romain Lesur. Sspcloud: a creative factory to support experimentations in the field of official statistics. *Courrier des Statistiques, INSEE*, 7:68–85, 2022.
7. Thomas H Davenport and DJ Patil. Data scientist. *Harvard business review*, 90(5):70–76, 2012.
8. Jeffrey Dean and Sanjay Ghemawat. Mapreduce: simplified data processing on large clusters. *Communications of the ACM*, 51(1):107–113, 2008.
9. Pascaline Descy, Vladimir Kvetan, Albrecht Wirthmann, and Fernando Reis. Towards a shared infrastructure for online job advertisement data. *Statistical Journal of the IAOS*, 35(4):669–675, 2019.
10. DGINS. Bucharest memorandum on official statistics in a datafied society. <https://ec.europa.eu/eurostat/documents/13019146/13237859/>

- \The+Bucharest+Memorandum+on+Trusted+Smart+Statistics+FINAL.pdf/7a8f6a8f-9805-e77c-a409-eb55a2b36bce?t=1634144384767, 2018.
11. Bijesh Dhyani and Anurag Barthwal. Big data analytics using hadoop. *International Journal of Computer Applications*, 108(12):0975–8887, 2014.
  12. EUROSTAT. Essnet big data 2 - final technical report. [https://wayback.archive-it.org/12090/20221110013641/https://ec.europa.eu/eurostat/cros/system/files/wpa\\_deliverable\\_a5\\_final\\_technical\\_report\\_2021\\_06\\_29.pdf](https://wayback.archive-it.org/12090/20221110013641/https://ec.europa.eu/eurostat/cros/system/files/wpa_deliverable_a5_final_technical_report_2021_06_29.pdf), 2021.
  13. Apache Software Foundation. Apache parquet. <https://parquet.apache.org/>, 2013.
  14. Apache Software Foundation. Apache arrow. <https://arrow.apache.org/>, 2016.
  15. Sanjay Ghemawat, Howard Gobioff, and Shun-Tak Leung. The google file system. In *Proceedings of the nineteenth ACM symposium on Operating systems principles*, pages 29–43, 2003.
  16. Taeke Gjaltema. High-level group for the modernisation of official statistics (hlg-mos) of the united nations economic commission for europe. *Statistical Journal of the IAOS*, 38(3):917–922, 2022.
  17. Shivani Gokhale, Reetika Poosarla, Sanjeevani Tikar, Swapnali Gunjawate, Aparna Hajare, Shilpa Deshpande, Sourabh Gupta, and Kanchan Karve. Creating helm charts to ease deployment of enterprise application and its related services in kubernetes. In *2021 international conference on computing, communication and green engineering (CCGE)*, pages 1–5. IEEE, 2021.
  18. Armand Joulin, Edouard Grave, Piotr Bojanowski, and Tomas Mikolov. Bag of tricks for efficient text classification. *arXiv preprint arXiv:1607.01759*, 2016.
  19. Alexander Kowarik and Magdalena Six. Quality guidelines for the acquisition and usage of big data with additional insights on web data. In *4th International Conference on Advanced Research Methods and Analytics (CARMA 2022)*, pages 269–269. Editorial Universitat Politècnica de València, 2022.
  20. Dominik Kreuzberger, Niklas Kühn, and Sebastian Hirschl. Machine learning operations (mlops): Overview, definition, and architecture. *IEEE Access*, 2023.
  21. Marie Leclair et al. Using scanner data to calculate the consumer price index. *Courrier des statistiques*, 3:61–75, 2019.
  22. Leonardo Leite, Carla Rocha, Fabio Kon, Dejan Milojevic, and Paulo Meirelles. A survey of devops concepts and challenges. *ACM Computing Surveys (CSUR)*, 52(6):1–35, 2019.
  23. Yun Li, Manzhou Yu, Mengchao Xu, Jingchao Yang, Dexuan Sha, Qian Liu, and Chaowei Yang. Big data and cloud computing. *Manual of digital earth*, pages 325–355, 2020.
  24. Ling Liu. Computing infrastructure for big data processing. *Frontiers of Computer Science*, 7:165–170, 2013.
  25. Sybille Luhmann, Jacopo Grazzini, Fabio Ricciato, Mátyás Mészáros, Jean-Marc Museux, and Martina Hahn. Promoting reproducibility-by-design in statistical offices. In *2019 New Techniques and Technologies for Statistics (NTTS) conference*, 03 2019.
  26. Marcia McNutt. Reproducibility. *Science*, 343(6168):229–229, 2014.
  27. Mike Mesnier, Gregory R Ganger, and Erik Riedel. Object-based storage. *IEEE Communications Magazine*, 41(8):84–90, 2003.
  28. David Moreau, Kristina Wiebels, and Carl Boettiger. Containers for computational reproducibility. *Nature Reviews Methods Primers*, 3(1):50, 2023.
  29. Justice Opara-Martins, M Sahandi, and Feng Tian. A holistic decision framework to avoid vendor lock-in for cloud saas migration. *Computer and Information Science*, 10(3), 2017.
  30. Justice Opara-Martins, Reza Sahandi, and Feng Tian. Critical analysis of vendor lock-in and its impact on cloud computing migration: a business perspective. *Journal of Cloud Computing*, 5:1–18, 2016.
  31. Mark Raasveldt and Hannes Mühleisen. Duckdb: an embeddable analytical database. In *Proceedings of the 2019 International Conference on Management of Data*, pages 1981–1984, 2019.
  32. Fabio Ricciato, Freddy De Meersman, Albrecht Wirthmann, Gerdy Seynaeve, and Michail Skaliotis. Processing of mobile network operator data for official statistics: the case for public-private partnerships. In *104th DGINS conference*, 2018.

33. Fabio Ricciato, Albrecht Wirthmann, Konstantinos Giannakouris, Michail Skaliotis, et al. Trusted smart statistics: Motivations and principles. *Statistical Journal of the IAOS*, 35(4):589–603, 2019.
34. Anam Saiyeda and Mansoor Ahmad Mir. Cloud computing for deep learning analytics: A survey of current trends and challenges. *International Journal of Advanced Research in Computer Science*, 8(2), 2017.
35. David Salgado, Luis Sanguiao-Sande, Sandra Barragán, Bogdan Oancea, and Milena Suarez-Castillo. A proposed production framework with mobile network data. In *ESSnet Big Data II - Workpackage I - Mobile Network Data*, 2020.
36. S Samundiswary and Nilma M Dongre. Object storage architecture in cloud for unstructured data. In *2017 International Conference on Inventive Systems and Control (ICISC)*, pages 1–6. IEEE, 2017.
37. Charles M Schweik. Free/open-source software as a framework for establishing commons in science. 2006.
38. Steven Vale. International collaboration to understand the relevance of big data for official statistics. *Statistical Journal of the IAOS*, 31(2):159–163, 2015.
39. Rafael Vaño, Ignacio Lacalle, Piotr Sowiński, Raúl S-Julián, and Carlos E Palau. Cloud-native workload orchestration at the edge: A deployment review and future directions. *Sensors*, 23(4):2215, 2023.
40. Qi Zhang, Ling Liu, Calton Pu, Qiwei Dou, Liren Wu, and Wei Zhou. A comparative study of containers and virtual machines in big data environment. In *2018 IEEE 11th International Conference on Cloud Computing (CLOUD)*, pages 178–185. IEEE, 2018.