


I-MAP: LOGBOOK (AI USAGE)

TSMK

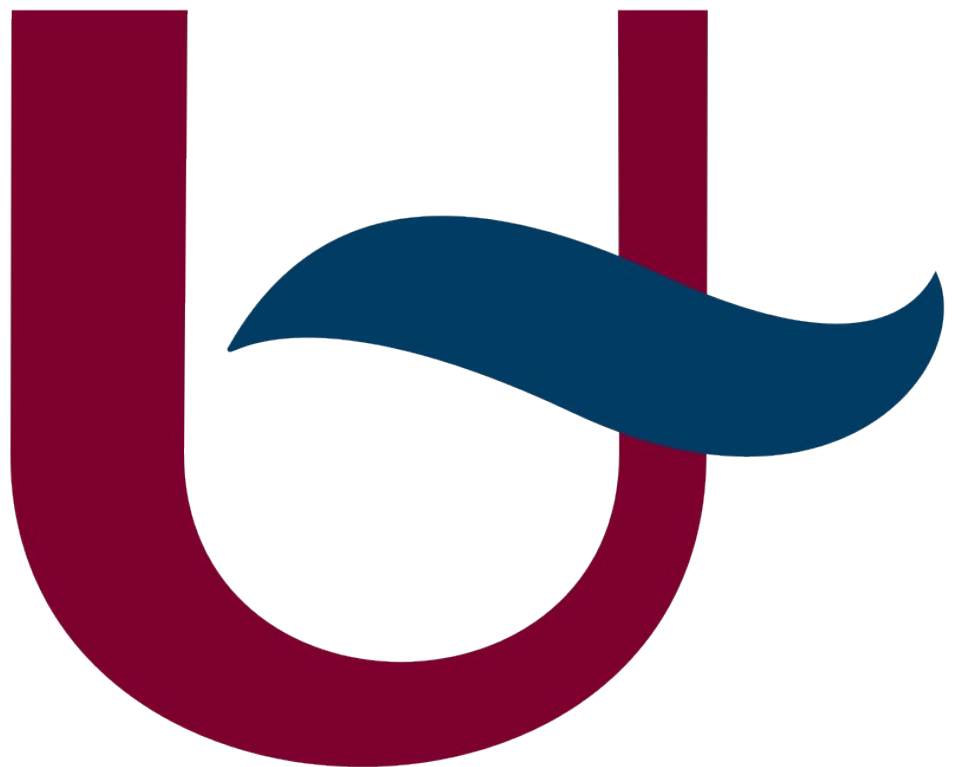

LLM request

△ [ChatGPT](#) was used for this prompt.

How can i install FreeCad 1.0 on my debian 12 machine

LLM response

On **Debian 12 (Bookworm)** the repository version of **FreeCAD** is old (around **0.20**). Debian stable usually doesn't update major versions after release, so **FreeCAD 1.0 isn't in the official Debian 12 repos**.

So you need one of these methods.

Option 1 (Best & simplest): AppImage

This is usually the easiest way to run **FreeCAD 1.0** on Debian.

1. Download

Go to the official downloads and get the **Linux AppImage**:

- <https://www.freecad.org/downloads.php>

Example from terminal:

```
wget
https://github.com/FreeCAD/FreeCAD/releases/download/1.0.0/FreeCAD_1.0
.0-Linux-x86_64.AppImage
```

2. Make executable

```
chmod +x FreeCAD_1.0.0-Linux-x86_64.AppImage
```

3. Run it

```
./FreeCAD_1.0.0-Linux-x86_64.AppImage
```

- ✓ No installation needed
- ✓ Uses its own dependencies
- ✓ Safest for Debian stable

Option 2: Flatpak (very common)

If you use Flatpak:

Install flatpak

```
sudo apt install flatpak
```

Add Flathub

```
flatpak remote-add --if-not-exists flathub
https://flathub.org/repo/flathub.flatpakrepo
```

Install FreeCAD

```
flatpak install flathub org.freecad.FreeCAD
```

Run with:

```
flatpak run org.freecad.FreeCAD
```

Option 3: Snap

If you use Snap packages:

```
sudo apt install snapd
sudo snap install freecad
```

Snaps bundle dependencies and update automatically.

Option 4 (not recommended): Debian unstable package

FreeCAD 1.0 exists in **Debian unstable (sid)** packages.

But installing it on Debian 12 can create a **“FrankenDebian”** due to dependency upgrades.

✓ **Recommendation for Debian 12:**

Use **AppImage** or **Flatpak**.

- AppImage → simplest
- Flatpak → integrates with desktop menus

🔗 If you want, I can also show you a **nice way to integrate the AppImage into your Debian menu (with icon + launcher)** so it behaves like a normal installed app.

LLM request

How can i integrate the appimage into the desktop menus

LLM resopnse

To integrate the **FreeCAD AppImage** into your **Debian 12 desktop menu**, you just need to create a **.desktop launcher** and add an icon. This works on **GNOME, KDE, XFCE, Cinnamon, etc.** 🐧

1 Move the AppImage to a permanent location

Create a folder for AppImages and move it there:

```
mkdir -p ~/Applications
mv FreeCAD_1.0.0-Linux-x86_64.AppImage ~/Applications/
chmod +x ~/Applications/FreeCAD_1.0.0-Linux-x86_64.AppImage
```

This keeps things organized.

2 Download a FreeCAD icon

Example:

```
wget
https://raw.githubusercontent.com/FreeCAD/FreeCAD/main/src/Gui/Icons/freecad.svg -O ~/Applications/freecad.svg
```

3 Create a desktop launcher

Create the launcher file:

```
nano ~/.local/share/applications/freecad.desktop
```

Paste this:

```
[Desktop Entry]
Name=FreeCAD 1.0
Comment=3D Parametric CAD Modeler
Exec=/home/YOURUSERNAME/Applications/FreeCAD_1.0.0-Linux-x86_64.AppImage
Icon=/home/YOURUSERNAME/Applications/freecad.svg
Terminal=false
Type=Application
Categories=Graphics;Engineering;
StartupNotify=true
```

Replace **YOURUSERNAME** with your Linux username.

Save and exit:

- **Ctrl + O**
- **Enter**
- **Ctrl + X**

4 Make it executable

```
chmod +x ~/.local/share/applications/freecad.desktop
```

5 Refresh desktop database

Usually not required, but safe:

```
update-desktop-database ~/.local/share/applications
```

✓ Now **FreeCAD** will appear in your application launcher/menu like a normal installed program.

🔧 **Optional nice improvement**

You can also allow the launcher to appear on the desktop:

```
cp ~/.local/share/applications/freecad.desktop ~/Desktop/  
chmod +x ~/Desktop/freecad.desktop
```

🔥 If you want, I can also show you an **automatic AppImage manager (AppImageLauncher)** that integrates **any AppImage automatically into the system menus with one click**. It makes AppImages behave like normal installed apps.

LLM request

```
1) Download the AppImage
--2026-03-09 12:46:27--
https://github.com/FreeCAD/FreeCAD/releases/download/1.0.2/FreeCAD_1.0.2-Linux-
x86_64.AppImage
Resolving github.com (github.com)... 140.82.121.3
Connecting to github.com (github.com)|140.82.121.3|:443... connected. HTTP request
sent, awaiting response... 404 Not Found
2026-03-09 12:46:28 ERROR 404: Not Found.
```


LLM response

The Linux AppImages for **FreeCAD 1.0.2** are **not in the FreeCAD/FreeCAD repository**.

They are published in a different repository called **FreeCAD/FreeCAD-Bundle**. Also, the filename changed slightly.

Correct download URL

Use this instead:

```
https://github.com/FreeCAD/FreeCAD-Bundle/releases/download/1.0.2/FreeCAD_1.0.2-conda-Linux-x86_64-py311.AppImage
```

Example command:

```
wget -O FreeCAD_1.0.2.AppImage \
https://github.com/FreeCAD/FreeCAD-Bundle/releases/download/1.0.2/FreeCAD_1.0.2-conda-Linux-x86_64-py311.AppImage
```

The asset name includes:

```
conda-Linux-x86_64-py311
```

because the official AppImage is built with a **conda Python environment**.

Recommended fix in your script

Change this line:

```
wget -O "$APPIMAGE" \
https://github.com/FreeCAD/FreeCAD/releases/download/1.0.2/FreeCAD_1.0.2-Linux-x86_64.AppImage
```

to:

```
wget -O "$APPIMAGE" \
https://github.com/FreeCAD/FreeCAD-Bundle/releases/download/1.0.2/FreeCAD_1.0.2-conda-Linux-x86_64-py311.AppImage
```

Optional improvement (very useful)

Right now your script **breaks whenever the version changes**.

A nicer installer automatically downloads **the latest release of FreeCAD**.

If you want, I can show you a **small Bash trick using the GitHub API** so your script always installs the newest version automatically (no hardcoding versions). It only adds about **4 lines** to your script and makes it much more robust. ✍️