

# The **bodeplot** package\*

Rushikesh Kamalapurkar  
rlkamalapurkar@gmail.com

November 3, 2021

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Usage</b>	<b>2</b>
2.1	Bode plots . . . . .	2
2.1.1	Basic components up to first order . . . . .	7
2.1.2	Basic components of the second order . . . . .	8
2.2	Nyquist plots . . . . .	10
2.3	Nichols charts . . . . .	12
<b>3</b>	<b>Implementation</b>	<b>13</b>
3.1	Initialization . . . . .	13
3.2	Parametric function generators for poles, zeros, gains, and delays. . . . .	14
3.3	Second order systems. . . . .	16
3.4	Commands for Bode plots . . . . .	18
3.4.1	User macros . . . . .	18
3.4.2	Internal macros . . . . .	21
3.5	Nyquist plots . . . . .	26
3.5.1	User macros . . . . .	26
3.5.2	Internal commands . . . . .	29
3.6	Nichols charts . . . . .	30

## 1 Introduction

Generate Bode, Nyquist, and Nichols plots for transfer functions in the canonical (TF) form

$$G(s) = e^{-Ts} \frac{b_m s^m + \cdots + b_1 s + b_0}{a_n s^n + \cdots + a_1 s + a_0} \quad (1)$$

---

\*This document corresponds to **bodeplot** v1.0.3, dated November 3, 2021.

and the zero-pole-gain (ZPK) form

$$G(s) = K e^{-Ts} \frac{(s - z_1)(s - z_2) \cdots (s - z_m)}{(s - p_1)(s - p_2) \cdots (s - p_n)}. \quad (2)$$

In the equations above,  $b_m, \dots, b_0$  and  $a_n, \dots, a_0$  are real coefficients,  $T \geq 0$  is the loop delay,  $z_1, \dots, z_m$  and  $p_1, \dots, p_n$  are complex zeros and poles of the transfer function, respectively, and  $K \in \mathbb{R}$  is the loop gain. For transfer functions in the ZPK format in (2) with zero delay, this package also supports linear and asymptotic approximation of Bode plots. **Limitation:** in TF form, the phase angles are always between 0 and  $360^\circ$ . As such, the Bode phase plots and the Nyquist and Nichols plots will have phase wrapping discontinuities. I do not know how this can be rectified, pull requests are welcome!

## 2 Usage

### 2.1 Bode plots

`\BodeZPK` `\BodeZPK [ $\langle obj1/typ1/\{opt1\} \rangle, obj2/typ2/\{opt2\} \rangle, \dots ]$   
 $\{ \langle z/\{zeros\} \rangle, p/\{poles\} \rangle, k/\{gain\} \rangle, d/\{delay\} \rangle \}$   
 $\{ \langle min-freq \rangle \} \{ \langle max-freq \rangle \}$`

Plots the Bode plot of a transfer function given in ZPK format using the `groupplot` environment. The three mandatory arguments include: (1) a list of tuples, comprised of the zeros, the poles, the gain, and the transport delay of the transfer function, (2) the lower end of the frequency range for the  $x$ -axis, and (3) the higher end of the frequency range for the  $x$ -axis. The zeros and the poles are complex numbers, entered as a comma-separated list of comma-separated lists, of the form `{real part 1,imaginary part 1}, {real part 2,imaginary part 2}, \dots`. If the imaginary part is not provided, it is assumed to be zero.

The optional argument is comprised of a comma separated list of tuples, either `obj/typ/{opt}`, or `obj/{opt}`, or just `{opt}`. Each tuple passes options to different `pgfplots` macros that generate the group, the axes, and the plots according to:

- Tuples of the form `obj/typ/{opt}`:
  - `plot/typ/{opt}`: modify plot properties by adding options `{opt}` to the `\addplot` macro for the magnitude plot if `typ` is `mag` and the phase plot if `typ` is `ph`.
  - `axes/typ/{opt}`: modify axis properties by adding options `{opt}` to the `\nextgroupplot` macro for the magnitude plot if `typ` is `mag` and the phase plot if `typ` is `ph`.
  - `commands/typ/{opt}`: add any valid TikZ commands (including the the parametric function generator macros in this package, such as `\addBodeZPKPlots`, `\addBodeTFPlot`, and `\addBodeComponentPlot`)

to the magnitude axes plot if `typ` is `mag` and the phase plot if `typ` is `ph`. The commands passed to `opt` need to be valid TikZ commands, separated by semicolons as usual. For example, a TikZ command is used in the description of the `\BodeTF` macro below to mark the gain crossover frequency on the Bode Magnitude plot.

- Tuples of the form `obj/{opt}`:
  - `plot/{opt}`: adds options `{opt}` to `\addplot` macros for both the magnitude and the phase plots.
  - `axes/{opt}`: adds options `{opt}` to `\nextgroupplot` macros for both the magnitude and the phase plots.
  - `group/{opt}`: adds options `{opt}` to the `groupplot` environment.
  - `tikz/{opt}`: adds options `{opt}` to the `tikzpicture` environment.
  - `approx/linear`: plots linear approximation.
  - `approx/asymptotic`: plots asymptotic approximation.
- Tuples of the form `{opts}` add all of the supplied options to `\addplot` macros for both the magnitude and the phase plots.

The options `{opt}` can be any `key=value` options that are supported by the `pgfplots` macros they are added to. *Linear or asymptotic approximation of transfer functions that include a transport delay is not supported.*

For example, given a transfer function

$$G(s) = 10 \frac{s(s + 0.1 + 0.5i)(s + 0.1 - 0.5i)}{(s + 0.5 + 10i)(s + 0.5 - 10i)}, \quad (3)$$

its Bode plot over the frequency range  $[0.01, 100]$  can be generated using

```
\BodeZPK [blue,thick]
{z/{0,{-0.1,-0.5},{-0.1,0.5}},p/{{-0.5,-10},{-0.5,10}},k/10}
{0.01}{100}
```

which generates the plot in Figure 1. If a delay is not specified, it is assumed to be zero. If a gain is not specified, it is assumed to be 1. By default, each of the axes, excluding ticks and labels, are 5cm wide and 2.5cm high. The width and the height, along with other properties of the plots, the axes, and the group can be customized using native `pgf` keys as shown in the example below.

As demonstrated in this example, if a single comma-separated list of options is passed, it applies to both the magnitude and the phase plots. Without any optional arguments, we get a thick black Bode plot.

A linear approximation of the Bode plot with customization of the plots, the axes, and the group can be generated using

```
\BodeZPK[plot/mag/{red,thick},plot/ph/{blue,thick},
axes/mag/{ytick distance=40,xmajorticks=true,
xlabel={Frequency (rad/s)}},axes/ph/{ytick distance=90},
group/{group style={group size=2 by 1,horizontal sep=2cm},
```

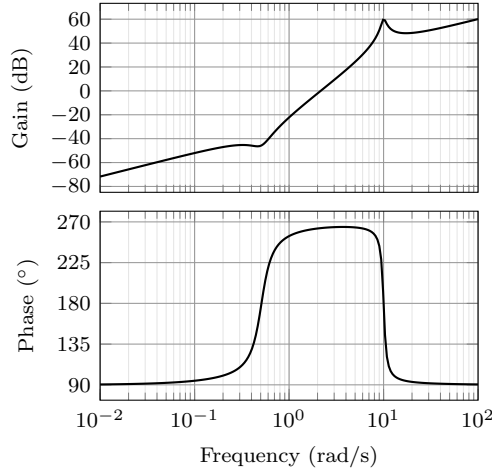


Figure 1: Output of the default `\BodeZPK` macro.

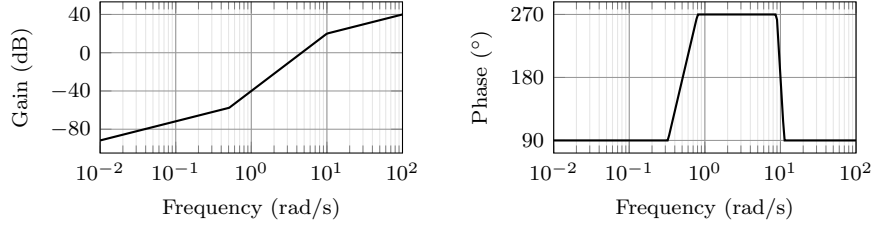


Figure 2: Customization of the default `\BodeZPK` macro.

```
width=4cm,height=2cm}},approx/linear]
{z/{0,{-0.1,-0.5},{-0.1,0.5}},p/{-0.5,-10},{-0.5,10}},k/10}
{0.01}{100}
```

which generates the plot in Figure 2.

```
\BodeTF [obj1/typ1{opt1},obj2/typ2{opt2},...]
  {num{coeffs},den{coeffs},d{delay}}
  {min-freq}{max-freq}
```

Plots the Bode plot of a transfer function given in TF format. The three mandatory arguments include: (1) a list of tuples comprised of the coefficients in the numerator and the denominator of the transfer function and the transport delay, (2) the lower end of the frequency range for the  $x$ -axis, and (3) the higher end of the frequency range for the  $x$ -axis. The coefficients are entered as a comma-separated list, in order from the highest degree of  $s$  to the lowest, with zeros for missing degrees. The optional arguments are the same as `\BodeZPK`, except that linear/asymptotic approximation is not supported, so `approx/...` is ignored.

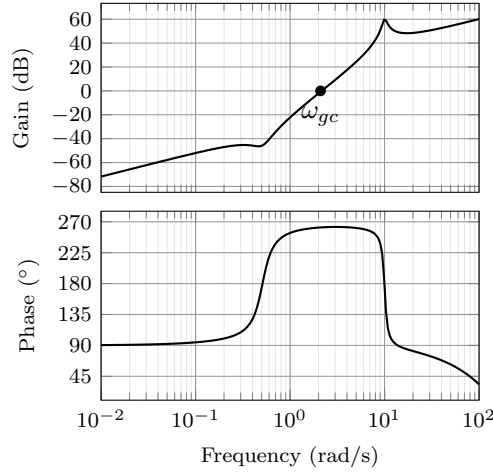


Figure 3: Output of the `\BodeTF` macro with an optional TikZ command used to mark the gain crossover frequency.

For example, given the same transfer function as (3) in TF form and with a small transport delay,

$$G(s) = e^{-0.01s} \frac{s(10s^2 + 2s + 2.6)}{(s^2 + s + 100.25)}, \quad (4)$$

its Bode plot over the frequency range  $[0.01, 100]$  can be generated using

```
\BodeTF[commands/mag/{\node at (axis cs: 2.1,0)
[circle,fill,inner sep=0.05cm,label=below:{$\omega_{gc}$}}];]
{num/{10,2,2.6,0},den/{1,0.2,100},d/0.01}
{0.01}{100}
```

which generates the plot in Figure 3. Note the 0 added to the numerator coefficients to account for the fact that the numerator does not have a constant term in it. Note the semicolon after the TikZ command passed to the `\commands` option.

```
BodePlot \begin{BodePlot}[<axis-options>]{<min-frequency>}{<max-frequency>}
\addBode...
\end{BodePlot}
```

The `BodePlot` environment works in conjunction with the parametric function generator macros `\addBodeZPKPlots`, `\addBodeTFPlot`, and `\addBodeComponentPlot`. If supplied, `axis-options` are passed directly to the `semilogaxis` environment and the frequency limits are translated to the x-axis limits and the domain of the `semilogaxis` environment. Example usage in the description of `\addBodeZPKPlots`, `\addBodeTFPlot`, and `\addBodeComponentPlot`.

```
\addBodeZPKPlots \addBodeZPKPlots [<approx1/{<opt1>},<approx2/{<opt2>},...]
{<plot-type>}
{<z/{<zeros>}>,<p/{<poles>}>,<k/{<gain>}>,<d/{<delay>}>}
```

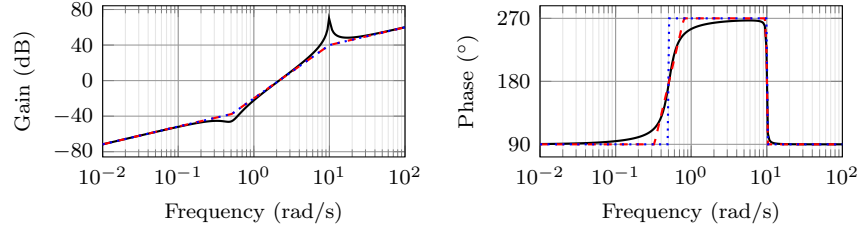


Figure 4: Superimposed approximate and true Bode plots using the `BodePlot` environment and the `\addBodeZPKPlots` macro.

Generates the appropriate parametric functions and supplies them to multiple `\addplot` macros, one for each `approx/{opt}` pair in the optional argument. If no optional argument is supplied, then a single `\addplot` command corresponding to a thick true Bode plot is generated. If an optional argument is supplied, it needs to be one of `true/{opt}`, `linear/{opt}`, or `asymptotic/{opt}`. This macro can be used inside any `semilogaxis` environment as long as a domain for the x-axis is supplied through either the `approx/{opt}` interface or directly in the optional argument of the `semilogaxis` environment. Use with the `BodePlot` environment supplied with this package is recommended. The second mandatory argument, `plot-type` is either `magnitude` or `phase`. If it is not equal to `phase`, it is assumed to be `magnitude`. The last mandatory argument is the same as `\BodeZPK`.

For example, given the transfer function in (3), its linear, asymptotic, and true Bode plots can be superimposed using

```
\begin{BodePlot}[ ylabel={Gain (dB)}, ytick distance=40,
  height=2cm, width=4cm] {0.01} {100}
  \addBodeZPKPlots[
    true/{black,thick},
    linear/{red,dashed,thick},
    asymptotic/{blue,dotted,thick}]
    {magnitude}
    {z/{0,{-0.1,-0.5},{-0.1,0.5}},p/{{-0.1,-10},{-0.1,10}},k/10}
\end{BodePlot}

\begin{BodePlot}[ylabel={Phase ( $^{\circ}$ )},
  height=2cm, width=4cm, ytick distance=90,] {0.01} {100}
  \addBodeZPKPlots[
    true/{black,thick},
    linear/{red,dashed,thick},
    asymptotic/{blue,dotted,thick}]
    {phase}
    {z/{0,{-0.1,-0.5},{-0.1,0.5}},p/{{-0.1,-10},{-0.1,10}},k/10}
\end{BodePlot}
```

which generates the plot in Figure 4.

`\addBodeTFPlot`      `\addBodeTFPlot[ $\langle plot-options \rangle$ ]`  
                            $\{\langle plot-type \rangle\}$   
                            $\{\langle num/\{coeffs\} \rangle, \langle den/\{coeffs\} \rangle, \langle d/\{delay\} \rangle\}$

Generates a single parametric function for either Bode magnitude or phase plot of a transfer function in TF form. The generated parametric function is passed to the `\addplot` macro. This macro can be used inside any `semilogaxis` environment as long as a domain for the x-axis is supplied through either the `plot-options` interface or directly in the optional argument of the container `semilogaxis` environment. Use with the `BodePlot` environment supplied with this package is recommended. The second mandatory argument, `plot-type` is either `magnitude` or `phase`. If it is not equal to `phase`, it is assumed to be `magnitude`. The last mandatory argument is the same as `\BodeTF`.

`\addBodeComponentPlot`      `\addBodeComponentPlot[ $\langle plot-options \rangle$ ]{ $\langle plot-command \rangle$ }`

Generates a single parametric function corresponding to the mandatory argument `plot-command` and passes it to the `\addplot` macro. The plot command can be any parametric function that uses `t` as the independent variable. The parametric function must be `gnuplot` compatible (or `pgfplots` compatible if the package is loaded using the `pgf` option). The intended use of this macro is to plot the parametric functions generated using the basic component macros described in Section 2.1.1 below.

### 2.1.1 Basic components up to first order

`\TypeFeatureApprox`      `\TypeFeatureApprox{\langle real-part \rangle}{\langle imaginary-part \rangle}`

This entry describes 20 different macros of the form `\TypeFeatureApprox` that take the real part and the imaginary part of a complex number as arguments. The **Type** in the macro name should be replaced by either **Mag** or **Ph** to generate a parametric function corresponding to the magnitude or the phase plot, respectively. The **Feature** in the macro name should be replaced by one of **K**, **Pole**, **Zero**, or **Del**, to generate the Bode plot of a gain, a complex pole, a complex zero, or a transport delay, respectively. If the **Feature** is set to either **K** or **Del**, the `imaginary-part` mandatory argument is ignored. The **Approx** in the macro name should either be removed, or it should be replaced by **Lin** or **Asymp** to generate the true Bode plot, the linear approximation, or the asymptotic approximation, respectively. If the **Feature** is set to **Del**, then **Approx** has to be removed. For example,

- `\MagK{k}{0}` or `\MagK{k}{400}` generates a parametric function for the true Bode magnitude of  $G(s) = k$
- `\PhPoleLin{a}{b}` generates a parametric function for the linear approximation of the Bode phase of  $G(s) = \frac{1}{s-a-ib}$ .
- `\PhDel{T}{200}` or `\PhDel{T}{0}` generates a parametric function for the Bode phase of  $G(s) = e^{-Ts}$ .

All 20 of the macros defined by combinations of **Type**, **Feature**, and **Approx**, and any `gnuplot` (or `pgfplot` if the `pgf` class option is loaded) compatible function of

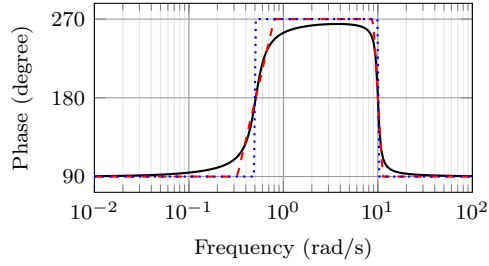


Figure 5: Superimposed approximate and true Bode Phase plot using the `BodePlot` environment, the `\addBodeComponentPlot` macro, and several macros of the `\TypeFeatureApprox` form.

the 20 macros can be used as `plot-command` in the `addBodeComponentPlot` macro. This is sufficient to generate the Bode plot of any rational transfer function with delay. For example, the Bode phase plot in Figure 4 can also be generated using:

```
\begin{BodePlot}[ylabel={Phase (degree)},ytick distance=90]{0.01}{100}
  \addBodeComponentPlot[black,thick]{\PhZero{0}{0} + \PhZero{-0.1}{-0.5} +
    \PhZero{-0.1}{0.5} + \PhPole{-0.5}{-10} + \PhPole{-0.5}{10} +
    \PhK{10}{0}}
  \addBodeComponentPlot[red,dashed,thick]{\PhZeroLin{0}{0} +
    \PhZeroLin{-0.1}{-0.5} + \PhZeroLin{-0.1}{0.5} +
    \PhPoleLin{-0.5}{-10} + \PhPoleLin{-0.5}{10} + \PhKLin{10}{20}}
  \addBodeComponentPlot[blue,dotted,thick]{\PhZeroAsymp{0}{0} +
    \PhZeroAsymp{-0.1}{-0.5} + \PhZeroAsymp{-0.1}{0.5} +
    \PhPoleAsymp{-0.5}{-10} + \PhPoleAsymp{-0.5}{10} + \PhKAsymp{10}{40}}
\end{BodePlot}
```

which gives us the plot in Figure 5.

### 2.1.2 Basic components of the second order

`\TypeS0FeatureApprox` `\TypeS0FeatureApprox{<a1>}{<a0>}`

This entry describes 12 different macros of the form `\TypeS0FeatureApprox` that take the coefficients  $a_1$  and  $a_0$  of a general second order system as inputs. The **Feature** in the macro name should be replaced by either **Poles** or **Zeros** to generate the Bode plot of  $G(s) = \frac{1}{s^2 + a_1 s + a_0}$  or  $G(s) = s^2 + a_1 s + a_0$ , respectively. The **Type** in the macro name should be replaced by either **Mag** or **Ph** to generate a parametric function corresponding to the magnitude or the phase plot, respectively. The **Approx** in the macro name should either be removed, or it should be replaced by **Lin** or **Asymp** to generate the true Bode plot, the linear approximation, or the asymptotic approximation, respectively.

`\MagS0FeaturePeak` `\MagS0FeaturePeak[<draw-options>]{<a1>}{<a0>}`

This entry describes 2 different macros of the form `\MagS0FeaturePeak` that take the the coefficients  $a_1$  and  $a_0$  of a general second order system as inputs, and draw



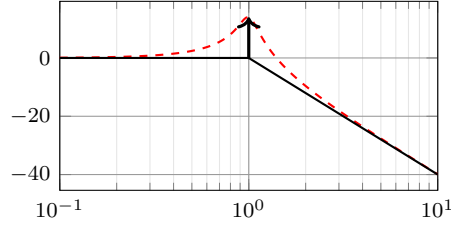


Figure 6: Resonant peak in asymptotic Bode plot using `\MagSOPolesPeak`.

a resonant peak using the `\draw TikZ` macro. The **Feature** in the macro name should be replaced by either **Poles** or **Zeros** to generate a peak for poles and a valley for zeros, respectively. For example, the command

```
\begin{BodePlot}[xlabel={}] {0.1}{10}
  \addBodeComponentPlot[red,dashed,thick]{\MagSOPoles{0.2}{1}}
  \addBodeComponentPlot[black,thick]{\MagSOPolesLin{0.2}{1}}
  \MagSOPolesPeak[thick]{0.2}{1}
\end{BodePlot}
```

generates the plot in Figure 6.

`\TypeCSFeatureApprox`

`\TypeCSFeatureApprox{<zeta>}{<omega-n>}`

This entry describes 12 different macros of the form `\TypeCSFeatureApprox` that take the damping ratio,  $\zeta$ , and the natural frequency,  $\omega_n$  of a canonical second order system as inputs. The **Type** in the macro name should be replaced by either **Mag** or **Ph** to generate a parametric function corresponding to the magnitude or the phase plot, respectively. The **Feature** in the macro name should be replaced by either **Poles** or **Zeros** to generate the Bode plot of  $G(s) = \frac{1}{s^2 + 2\zeta\omega_n s + \omega_n^2}$  or  $G(s) = s^2 + 2\zeta\omega_n s + \omega_n^2$ , respectively. The **Approx** in the macro name should either be removed, or it should be replaced by **Lin** or **Asymp** to generate the true Bode plot, the linear approximation, or the asymptotic approximation, respectively.

`\MagCSFeaturePeak`

`\MagCSFeaturePeak[<draw-options>]{<zeta>}{<omega-n>}`

This entry describes 2 different macros of the form `\MagCSFeaturePeak` that take the damping ratio,  $\zeta$ , and the natural frequency,  $\omega_n$  of a canonical second order system as inputs, and draw a resonant peak using the `\draw TikZ` macro. The **Feature** in the macro name should be replaced by either **Poles** or **Zeros** to generate a peak for poles and a valley for zeros, respectively.

`\MagCCFeaturePeak`

`\MagCCFeaturePeak[<draw-options>]{<real-part>}{<imaginary-part>}`

This entry describes 2 different macros of the form `\MagCCFeaturePeak` that take the real and imaginary parts of a pair of complex conjugate poles or zeros as inputs, and draw a resonant peak using the `\draw TikZ` macro. The **Feature** in the macro name should be replaced by either **Poles** or **Zeros** to generate a peak for poles and a valley for zeros, respectively.

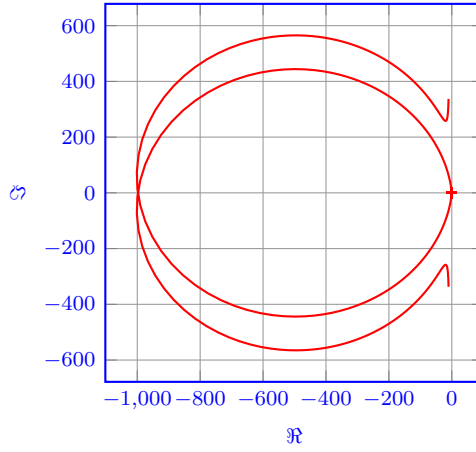


Figure 7: Output of the `\NyquistZPK` macro.

## 2.2 Nyquist plots

`\NyquistZPK` `\NyquistZPK [ $\langle plot/\{opt\} \rangle, axes/\{opt\} \rangle]$   
 $\{ \langle z/\{zeros\} \rangle, p/\{poles\} \rangle, k/\{gain\} \rangle, d/\{delay\} \rangle \}$   
 $\{ \langle min-freq \rangle \} \{ \langle max-freq \rangle \}$`

Plots the Nyquist plot of a transfer function given in ZPK format with a thick red + marking the critical point  $(-1,0)$ . The mandatory arguments are the same as `\BodeZPK`. Since there is only one plot in a Nyquist diagram, the `\typ` specifier in the optional argument tuples is not needed. As such, the supported optional argument tuples are `plot/\{opt\}`, which passes `\{opt\}` to `\addplot`, `axes/\{opt\}`, which passes `\{opt\}` to the axis environment, and `tikz/\{opt\}`, which passes `\{opt\}` to the `tikzpicture` environment. Asymptotic/linear approximations are not supported in Nyquist plots. If just `\{opt\}` is provided as the optional argument, it is interpreted as `plot/\{opt\}`. Arrows to indicate the direction of increasing  $\omega$  can be added by adding `\usetikzlibrary{decorations.markings}` and `\usetikzlibrary{arrows.meta}` to the preamble and then passing a tuple of the form

```
plot/{postaction=decorate,decoration={markings,
  mark=between positions 0.1 and 0.9 step 5em with
  {\arrow{Stealth [length=2mm, blue]}}}}
```

**Caution:** with a high number of samples, adding arrows in this way may cause the error message ! Dimension too big.

For example, the command

```
\NyquistZPK[plot/{red,thick,samples=2000},axes/{blue,thick}]
  {z/{0,{-0.1,-0.5},{-0.1,0.5}},p/{-0.5,-10},{-0.5,10}},k/10}
  {-30}{30}
```

generates the Nyquist plot in Figure 7.

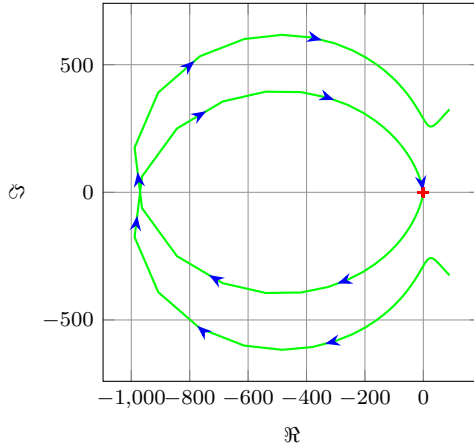


Figure 8: Output of the `\NyquistTF` macro with direction arrows. Increasing the number of samples can cause `decorations.markings` to throw errors.

```
\NyquistTF      \NyquistTF [plot/{opt}],axes/{opt}}]
                  {num/{coeffs}},den/{coeffs}},d/{delay}}]
                  {min-freq}{max-freq}
```

Nyquist plot of a transfer function given in TF format. Same mandatory arguments as `\BodeTF` and same optional arguments as `\NyquistZPK`. For example, the command

```
\NyquistTF[plot/{green,thick,samples=500,postaction=decorate,
  decoration={markings,
    mark=between positions 0.1 and 0.9 step 5em
    with{\arrow{Stealth[length=2mm, blue]}}}}]
{num/{10,2,2.6,0},den/{1,1,100.25}}
{-30}{30}
```

generates the Nyquist plot in Figure 8.

```
NyquistPlot      \begin{NyquistPlot}[axis-options]{min-frequency}{max-frequency}
                  \addNyquist...
                  \end{NyquistPlot}
```

The `NyquistPlot` environment works in conjunction with the parametric function generator macros `\addNyquistZPKPlot` and `\addNyquistTFPlot`. If supplied, `axis-options` are passed directly to the `axis` environment and the frequency limits are translated to the x-axis limits and the domain of the `axis` environment.

```
\addNyquistZPKPlot \addNyquistZPKPlot [plot-options]
                   {z/{zeros}},p/{poles}},k/{gain}},d/{delay}}]
```

Generates a two parametric functions for the magnitude and the phase of a transfer function in ZPK form. The generated magnitude and phase parametric functions are converted to real and imaginary part parametric functions and passed to the `\addplot` macro. This macro can be used inside any `axis` environment as long

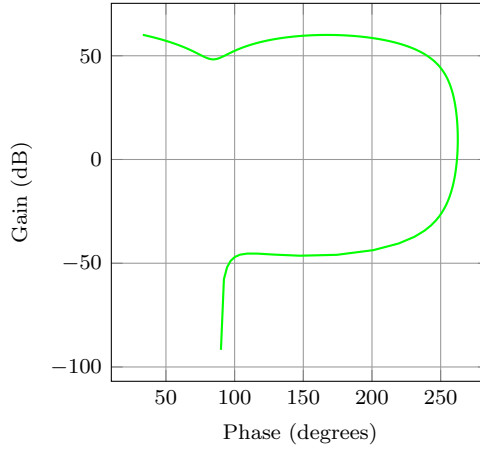


Figure 9: Output of the `\NyquistZPK` macro.

as a domain for the x-axis is supplied through either the `plot-options` interface or directly in the optional argument of the container `axis` environment. Use with the `NyquistPlot` environment supplied with this package is recommended. The mandatory argument is the same as `\BodeZPK`.

`\addNyquistTFPlot`      `\addNyquistTFPlot` [*plot-options*]  
                               {*num*/*coeffs*},*den*/*coeffs*},*d*/*delay*}

Similar to `\addNyquistZPKPlot`, with a transfer function input in the TF form.

## 2.3 Nichols charts

`\NicholsZPK`      `\NicholsZPK` [*plot*/*opt*},*axes*/*opt*}]  
                               {*z*/*zeros*},*p*/*poles*},*k*/*gain*},*d*/*delay*}]  
                               {*min-freq*},{*max-freq*}

Nichols chart of a transfer function given in ZPK format. Same arguments as `\NyquistZPK`.

`\NicholsTF`      `\NicholsTF` [*plot*/*opt*},*axes*/*opt*}]  
                               {*num*/*coeffs*},*den*/*coeffs*},*d*/*delay*}]  
                               {*min-freq*},{*max-freq*}

Nichols chart of a transfer function given in TF format. Same arguments as `\NyquistTF`. For example, the command

```
\NicholsTF[plot/{green,thick,samples=2000}]
{num/{10,2,2.6,0},den/{1,1,100.25},d/0.01}
{0.001}{100}
```

generates the Nichols chart in Figure 9.

`NicholsChart`      `\begin{NicholsChart}` [*axis-options*]{*min-frequency*},{*max-frequency*}]  
                               `\addNichols...`  
                               `\end{NicholsChart}`

The `NicholsChart` environment works in conjunction with the parametric function generator macros `\addNicholsZPKChart` and `\addNicholsTFChart`. If supplied, `axis-options` are passed directly to the `axis` environment and the frequency limits are translated to the x-axis limits and the domain of the `axis` environment.

```
\addNicholsZPKChart \addNicholsZPKChart[plot-options]  
                    {z/zeros},p/poles},k/gain},d/delay}}
```

Generates a two parametric functions for the magnitude and the phase a transfer function in ZPK form. The generated magnitude and phase parametric functions are passed to the `\addplot` macro. This macro can be used inside any `axis` environment as long as a domain for the x-axis is supplied through either the `plot-options` interface or directly in the optional argument of the container `axis` environment. Use with the `NicholsChart` environment supplied with this package is recommended. The mandatory argument is the same as `\BodeZPK`.

```
\addNicholsTFChart \addNicholsTFChart[plot-options]  
                   {num/coeffs},den/coeffs},d/delay}}
```

Similar to `\addNicholsZPKChart`, with a transfer function input in the TF form.

## 3 Implementation

### 3.1 Initialization

`\pdfstrcmp` The package makes extensive use of the `\pdfstrcmp` macro to parse options. Since that macro is not available in `lualatex`, this code is needed.

```
1 \RequirePackage{ifluatex}%  
2 \ifluatex  
3   \let\pdfstrcmp\pdf@strcmp  
4 \fi
```

`\n@mod` This code is needed to support both `pgfplots` and `gnuplot` simultaneously. New  
`\n@pow` macros are defined for the `pow` and `mod` functions to address differences between  
`idGnuplot` the two math engines. We start by processing the `pgf` class option.

```
gnuplot def 5 \newif\if@pgfarg\@pgfargfalse  
gnuplot degrees 6 \DeclareOption{pgf}{%  
7   \@pgfargtrue  
8 }  
9 \ProcessOptions\relax
```

Then, we define two new macros to unify `pgfplots` and `gnuplot`.

```
10 \if@pgfarg  
11   \newcommand{\n@pow}[2]{(#1)^{(#2)}}%  
12   \newcommand{\n@mod}[2]{mod((#1),(#2))}%  
13 \else  
14   \newcommand{\n@pow}[2]{(#1)**(#2)}%  
15   \newcommand{\n@mod}[2]{(#1)-(floor((#1)/(#2))*(#2))}%
```

Then, we create a counter so that a new data table is generated and for each new plot. If the plot macros have not changed, the tables, once generated, can be reused by `gnuplot`, which reduces compilation time.

```

16 \newcounter{idGnuplot}%
17 \setcounter{idGnuplot}{0}%
18 \tikzset{%
19   gnuplot def/.style={%
20     id=\arabic{idGnuplot},
21     prefix=gnuplot/
22   }%
23 }

```

Then, we add `set angles degrees` to all `gnuplot` macros to avoid having to convert from degrees to radians everywhere.

```

24 \pgfplotsset{%
25   gnuplot degrees/.code={%
26     \ifnum\value{idGnuplot}=1
27       \xdef\pgfplots@gnuplot@format{\pgfplots@gnuplot@format set angles degrees;}%
28     \fi
29   }%
30 }

```

If the operating system is not Windows, we create the `gnuplot` folder if it does not already exist.

```

31 \ifwindows\else
32   \immediate\write18{mkdir -p gnuplot}%
33 \fi
34 \fi

```

**bodeStyle** Default axis properties for all plot macros are collected in this `pgf` style.

```

35 \pgfplotsset{%
36   bodeStyle/.style = {%
37     label style={font=\footnotesize},
38     tick label style={font=\footnotesize},
39     grid=both,
40     major grid style={color=gray!80},
41     minor grid style={color=gray!20},
42     x label style={at={(ticklabel cs:0.5)},anchor=near ticklabel},
43     y label style={at={(ticklabel cs:0.5)},anchor=near ticklabel},
44     scale only axis,
45     samples=200,
46     width=5cm,
47   }%
48 }

```

### 3.2 Parametric function generators for poles, zeros, gains, and delays.

`\MagK` True, linear, and asymptotic magnitude and phase parametric functions for a pure gain  $G(s) = k + 0i$ . The macros take two arguments corresponding to real and  
`\MagKAsymp`  
`\MagKLin`  
`\PhK`  
`\PhKAsymp`  
`\PhKLin`

imaginary part of the gain to facilitate code reuse between delays, gains, poles, and zeros, but only real gains are supported. The second argument, if supplied, is ignored.

```
49 \newcommand*\MagK[2]{(20*log10(abs(#1)))}
50 \newcommand*\MagKAsymp{\MagK}
51 \newcommand*\MagKLin{\MagK}
52 \newcommand*\PhK[2]{(#1<0?-180:0)}
53 \newcommand*\PhKAsymp{\PhK}
54 \newcommand*\PhKLin{\PhK}
```

\PhKAsymp True magnitude and phase parametric functions for a pure delay  $G(s) = e^{-Ts}$ .  
\PhKLin The macros take two arguments corresponding to real and imaginary part of the gain to facilitate code reuse between delays, gains, poles, and zeros, but only real gains are supported. The second argument, if supplied, is ignored.

```
55 \newcommand*\MagDel[2]{0}
56 \newcommand*\PhDel[2]{-#1*180*t/pi}
```

\MagPole These macros are the building blocks for most of the plotting functions provided  
\MagPoleAsymp by this package. We start with Parametric function for the true magnitude of a  
\MagPoleLin complex pole.

```
\PhPole 57 \newcommand*\MagPole[2]
\PhPoleAsymp 58 {(-20*log10(sqrt(\n@pow{#1}{2} + \n@pow{t - (#2)}{2})))}
\PhPoleLin 59 {(-20*log10(sqrt(\n@pow{#1}{2} + \n@pow{#2}{2})) ?
```

Parametric function for linear approximation of the magnitude of a complex pole.

```
60 -20*log10(sqrt(\n@pow{#1}{2} + \n@pow{#2}{2})) :
61 -20*log10(t)
62 }}
```

Parametric function for asymptotic approximation of the magnitude of a complex pole, same as linear approximation.

```
63 \newcommand*\MagPoleAsymp{\MagPoleLin}
```

Parametric function for the true phase of a complex pole.

```
64 \newcommand*\PhPole[2]{(#1 > 0 ? (#2 > 0 ?
65 (\n@mod{-atan2((t - (#2)),-(#1))+360}{360}) :
66 (-atan2((t - (#2)),-(#1)))) :
67 (-atan2((t - (#2)),-(#1))))}
```

Parametric function for linear approximation of the phase of a complex pole.

```
68 \newcommand*\PhPoleLin[2]{%
69 (abs(#1)+abs(#2) == 0 ? -90 :
70 (t < (sqrt(\n@pow{#1}{2} + \n@pow{#2}{2}) /
71 (\n@pow{10}{sqrt(\n@pow{#1}{2}/(\n@pow{#1}{2} + \n@pow{#2}{2})))) ?
72 (-atan2(-(#2),-(#1))) :
73 (t >= (sqrt(\n@pow{#1}{2} + \n@pow{#2}{2}) *
74 (\n@pow{10}{sqrt(\n@pow{#1}{2}/(\n@pow{#1}{2} + \n@pow{#2}{2})))) ?
75 (#2>0?(#1>0?270:-90):-90) :
76 (-atan2(-(#2),-(#1)) + (log10(t/(sqrt(\n@pow{#1}{2} + \n@pow{#2}{2})) /
77 (\n@pow{10}{sqrt(\n@pow{#1}{2}/(\n@pow{#1}{2} +
```

```

78 \n@pow{#2}{2}}))))) * ((#2>0? (#1>0?270:-90):-90) + atan2(-( #2), -(#1)))/
79 (log10(\n@pow{10}{sqrt((4*\n@pow{#1}{2})/
80 (\n@pow{#1}{2} + \n@pow{#2}{2})))))))))}
Parametric function for asymptotic approximation of the phase of a complex pole.
81 \newcommand*\PhPoleAsymp}[2]{(t < (sqrt(\n@pow{#1}{2} + \n@pow{#2}{2})) ?
82 (-atan2(-( #2), -(#1))) :
83 (#2>0? (#1>0?270:-90):-90))}

```

\MagZero Plots of zeros are defined to be negative of plots of poles. The 0- is necessary due to a bug in gnuplot (fixed in version 5.4, patchlevel 3).

```

\MagZeroAsymp
\MagZeroLin 84 \newcommand*\MagZero{0-\MagPole}
\PhZero 85 \newcommand*\MagZeroLin{0-\MagPoleLin}
\PhZeroAsymp 86 \newcommand*\MagZeroAsymp{0-\MagPoleAsymp}
\PhZeroLin 87 \newcommand*\PhZero{0-\PhPole}
88 \newcommand*\PhZeroLin{0-\PhPoleLin}
89 \newcommand*\PhZeroAsymp{0-\PhPoleAsymp}

```

### 3.3 Second order systems.

Although second order systems can be dealt with using the macros defined so far, the following dedicated macros for second order systems involve less computation.

```

\MagCSPoles Consider the canonical second order transfer function  $G(s) = \frac{1}{s^2 + 2\zeta\omega_n s + \omega_n^2}$ . We
\MagCSPolesAsymp start with true, linear, and asymptotic magnitude plots for this transfer function.
\MagCSPolesLin 90 \newcommand*\MagCSPoles}[2]{(-20*log10(sqrt(\n@pow{\n@pow{#2}{2}
\PhCSPoles 91 - \n@pow{t}{2}}{2} + \n@pow{2*#1*#2*t}{2}))))}
\PhCSPolesAsymp 92 \newcommand*\MagCSPolesLin}[2]{(t < #2 ? -40*log10(#2) : - 40*log10(t))}
\PhCSPolesLin 93 \newcommand*\MagCSPolesAsymp{\MagCSPolesLin}
\MagCSZeros Then, we have true, linear, and asymptotic phase plots for the canonical second
\MagCSZerosAsymp order transfer function.
\MagCSZerosLin 94 \newcommand*\PhCSPoles}[2]{(-atan2((2*(#1)*(#2)*t), (\n@pow{#2}{2}
\PhCSZeros 95 - \n@pow{t}{2}))))}
\PhCSZerosAsymp 96 \newcommand*\PhCSPolesLin}[2]{(t < (#2 / (\n@pow{10}{abs(#1)})) ?
\PhCSZerosLin 97 0 :
98 (t >= (#2 * (\n@pow{10}{abs(#1)})) ?
99 (#1>0 ? -180 : 180) :
100 (#1>0 ? (-180*(log10(t*(\n@pow{10}{#1})/#2))/(2*#1)) :
101 (180*(log10(t*(\n@pow{10}{abs(#1)})/#2))/(2*abs(#1))))))}
102 \newcommand*\PhCSPolesAsymp}[2]{(#1>0?(t<#2?0:-180):(t<#2?0:180))}

```

Plots of the inverse function  $G(s) = s^2 + 2\zeta\omega_n s + \omega_n^2$  are defined to be negative of plots of poles. The 0- is necessary due to a bug in gnuplot (fixed in version 5.4, patchlevel 3).

```

103 \newcommand*\MagCSZeros{0-\MagCSPoles}
104 \newcommand*\MagCSZerosLin{0-\MagCSPolesLin}
105 \newcommand*\MagCSZerosAsymp{0-\MagCSPolesAsymp}
106 \newcommand*\PhCSZeros{0-\PhCSPoles}
107 \newcommand*\PhCSZerosLin{0-\PhCSPolesLin}
108 \newcommand*\PhCSZerosAsymp{0-\PhCSPolesAsymp}

```



`\MagCSPolesPeak` These macros are used to add a resonant peak to linear and asymptotic plots of  
`\MagCSZerosPeak` canonical second order poles and zeros. Since the plots are parametric, a separate  
`\draw` command is needed to add a vertical arrow.

```

109 \newcommand*\MagCSPolesPeak}[3][]{%
110   \draw[#1,->] (axis cs:{#3},{-40*log10(#3)}) --
111   (axis cs:{#3},{-40*log10(#3)-20*log10(2*abs(#2))})
112 }
113 \newcommand*\MagCSZerosPeak}[3][]{%
114   \draw[#1,->] (axis cs:{#3},{40*log10(#3)}) --
115   (axis cs:{#3},{40*log10(#3)+20*log10(2*abs(#2))})
116 }

```

`\MagSOPoles` Consider a general second order transfer function  $G(s) = \frac{1}{s^2 + as + b}$ . We start with  
`\MagSOPolesAsymp` true, linear, and asymptotic magnitude plots for this transfer function.

```

\MagSOPolesLin 117 \newcommand*\MagSOPoles}[2]{%
\PhSOPoles 118   (-20*log10(sqrt(\n@pow{#2} - \n@pow{t}{2}){2} + \n@pow{#1*t}{2})))}
\PhSOPolesAsymp 119 \newcommand*\MagSOPolesLin}[2]{%
\PhSOPolesLin 120   (t < sqrt(abs(#2)) ? -20*log10(abs(#2)) : - 40*log10(t)))}
\MagSOPoles 121 \newcommand*\MagSOPolesAsymp{\MagSOPolesLin}

```

`\MagSOPolesAsymp` Then, we have true, linear, and asymptotic phase plots for the general second  
`\MagSOPolesLin` order transfer function.

```

\PhSOPoles 122 \newcommand*\PhSOPoles}[2]{(-atan2((#1)*t,((#2) - \n@pow{t}{2})))}
\PhSOPolesAsymp 123 \newcommand*\PhSOPolesLin}[2]{(#2>0 ?
\PhSOPolesLin 124   \PhCSPolesLin{(#1/(2*sqrt(#2)))}{(sqrt(#2))} :
125   (#1>0 ? -180 : 180))}
126 \newcommand*\PhSOPolesAsymp}[2]{(#2>0 ?
127   \PhCSPolesAsymp{(#1/(2*sqrt(#2)))}{(sqrt(#2))} :
128   (#1>0 ? -180 : 180))}

```

Plots of the inverse function  $G(s) = s^2 + as + b$  are defined to be negative of  
plots of poles. The 0- is necessary due to a bug in gnuplot (fixed in version 5.4,  
patchlevel 3).

```

129 \newcommand*\MagSOPoles{0-\MagSOPoles}
130 \newcommand*\MagSOPolesLin{0-\MagSOPolesLin}
131 \newcommand*\MagSOPolesAsymp{0-\MagSOPolesAsymp}
132 \newcommand*\PhSOPoles{0-\PhSOPoles}
133 \newcommand*\PhSOPolesLin{0-\PhSOPolesLin}
134 \newcommand*\PhSOPolesAsymp{0-\PhSOPolesAsymp}

```

`\MagSOPolesPeak` These macros are used to add a resonant peak to linear and asymptotic plots of  
`\MagSOPolesPeak` general second order poles and zeros. Since the plots are parametric, a separate  
`\draw` command is needed to add a vertical arrow.

```

135 \newcommand*\MagSOPolesPeak}[3][]{%
136   \draw[#1,->] (axis cs:{sqrt(abs(#3))},{-20*log10(abs(#3))}) --
137   (axis cs:{sqrt(abs(#3))},{-20*log10(abs(#3)) -
138     20*log10(abs(#2/sqrt(abs(#3))))});
139 }
140 \newcommand*\MagSOPolesPeak}[3][]{%

```

```

141 \draw[#1,->] (axis cs:{sqrt(abs(#3))},{20*log10(abs(#3))}) --
142 (axis cs:{sqrt(abs(#3))},{20*log10(abs(#3)) +
143 20*log10(abs(#2/sqrt(abs(#3))))});
144 }

```

## 3.4 Commands for Bode plots

### 3.4.1 User macros

**\BodeZPK** This macro takes lists of complex poles and zeros of the form `{re,im}`, and values of gain and delay as inputs and constructs parametric functions for the Bode magnitude and phase plots. This is done by adding together the parametric functions generated by the macros for individual zeros, poles, gain, and delay, described above. The parametric functions are then plotted in a `tikzpicture` environment using the `\addplot` macro. Unless the package is loaded with the option `pgf`, the parametric functions are evaluated using `gnuplot`.

```

145 \newcommand{\BodeZPK}[4][approx/true]{%

```

Most of the work is done by the `\parse@opt` and the `\build@ZPK@plot` macros, described in the 'Internal macros' section. The former is used to parse the optional arguments and the latter to extract poles, zeros, gain, and delay from the first mandatory argument and to generate macros `\func@mag` and `\func@ph` that hold the magnitude and phase parametric functions.

```

146 \parse@opt{#1}%
147 \gdef\func@mag{}%
148 \gdef\func@ph{}%
149 \build@ZPK@plot{\func@mag}{\func@ph}{\opt@approx}{#2}%

```

The `\noexpand` macros below are needed so that only the macro `\opt@group` is expanded.

```

150 \edef\temp@cmd{\noexpand\begin{tikzpicture}}{\opt@tikz}\noexpand\begin{groupplot}}[%
151 bodeStyle,
152 xmin={#3},
153 xmax={#4},
154 domain=#3:#4,
155 height=2.5cm,
156 xmode=log,
157 group style = {group size = 1 by 2,vertical sep=0.25cm,},
158 \opt@group,]}
159 \temp@cmd

```

To ensure frequency tick marks on magnitude and the phase plots are always aligned, we use the `groupplot` library. The `\expandafter` chain below is used to expand macros in the plot and group optional arguments.

```

160 \if@pgfarg
161 \expandafter\nextgroupplot\expandafter[ytick distance=20,
162 ylabel={Gain (dB)},xmajorticks=false,\optmag@axes]
163 \edef\temp@cmd{\noexpand\addplot[thick,\optmag@plot]}%
164 \temp@cmd {\func@mag};
165 \optmag@commands;

```

```

166 \expandafter\nextgroupplot\expandafter[ytick distance=45,
167 ylabel={Phase ( $\circ$ )},xlabel={Frequency (rad/s)},\optph@axes]
168 \edef\temp@cmd{\noexpand\addplot[thick,\optph@plot]}\%
169 \temp@cmd {\func@ph};
170 \optph@commands;
171 \else

```

In `gnuplot` mode, we increment the `idGnuplot` counter before every plot to make sure that new and reusable `.gnuplot` and `.table` files are generated for every plot.

```

172 \stepcounter{idGnuplot}
173 \expandafter\nextgroupplot\expandafter[ytick distance=20,
174 ylabel={Gain (dB)},xmajorticks=false,\optmag@axes]
175 \edef\temp@cmd{\noexpand\addplot[thick,\optmag@plot]}\%
176 \temp@cmd gnuplot[gnuplot degrees,gnuplot def] {\func@mag};
177 \optmag@commands;
178 \stepcounter{idGnuplot}
179 \expandafter\nextgroupplot\expandafter[ytick distance=45,
180 ylabel={Phase ( $\circ$ )},xlabel={Frequency (rad/s)},\optph@axes]
181 \edef\temp@cmd{\noexpand\addplot[thick,\optph@plot]}\%
182 \temp@cmd gnuplot[gnuplot degrees,gnuplot def] {\func@ph};
183 \optph@commands;
184 \fi
185 \end{groupplot}\end{tikzpicture}
186 }

```

**\BodeTF** Implementation of this macro is very similar to the `\BodeZPK` macro above. The only difference is the lack of linear and asymptotic plots and slightly different parsing of the mandatory arguments.

```

187 \newcommand{\BodeTF}[4][\%]
188 \parse@opt{#1}\%
189 \gdef\func@mag{\%}
190 \gdef\func@ph{\%}
191 \build@TF@plot{\func@mag}{\func@ph}{#2}\%
192 \edef\temp@cmd{\noexpand\begin{tikzpicture}}[\opt@tikz]\noexpand\begin{groupplot}\%
193 bodeStyle,
194 xmin={#3},
195 xmax={#4},
196 domain=#3:#4,
197 height=2.5cm,
198 xmode=log,
199 group style = {group size = 1 by 2,vertical sep=0.25cm,},
200 \opt@group,}]
201 \temp@cmd
202 \if@pgfarg
203 \expandafter\nextgroupplot\expandafter[ytick distance=20,
204 ylabel={Gain (dB)},xmajorticks=false,\optmag@axes]
205 \edef\temp@cmd{\noexpand\addplot[thick,\optmag@plot]}\%
206 \temp@cmd {\func@mag};
207 \optmag@commands;

```

```

208 \expandafter\nextgroupplot\expandafter[ytick distance=45,
209 ylabel={Phase ( $\circ$ )},xlabel={Frequency (rad/s)},\optph@axes]
210 \edef\temp@cmd{\noexpand\addplot[thick,\optph@plot]}%
211 \temp@cmd {\func@ph};
212 \optph@commands;
213 \else
214 \stepcounter{idGnuplot}%
215 \expandafter\nextgroupplot\expandafter[ytick distance=20,
216 ylabel={Gain (dB)},xmajor ticks=false,\optmag@axes]
217 \edef\temp@cmd{\noexpand\addplot[thick,\optmag@plot]}%
218 \temp@cmd gnuplot[gnuplot degrees,gnuplot def] {\func@mag};
219 \optmag@commands;
220 \stepcounter{idGnuplot}%
221 \expandafter\nextgroupplot\expandafter[ytick distance=45,
222 ylabel={Phase ( $\circ$ )},xlabel={Frequency (rad/s)},\optph@axes]
223 \edef\temp@cmd{\noexpand\addplot[thick,\optph@plot]}%
224 \temp@cmd gnuplot[gnuplot degrees,gnuplot def] {\func@ph};
225 \optph@commands;
226 \fi
227 \end{groupplot}\end{tikzpicture}
228 }

```

**\addBodeZPKPlots** This macro is designed to issues multiple `\addplot` macros for the same set of poles, zeros, gain, and delay. All of the work is done by the `\build@ZPK@plot` macro.

```

229 \newcommand{\addBodeZPKPlots}[3][true/{}]{%
230 \foreach \approx/\opt in {#1} {%
231 \gdef\plot@macro{}%
232 \gdef\temp@macro{}%
233 \ifnum\pdfstrcmp{#2}{phase}=0
234 \build@ZPK@plot{\temp@macro}{\plot@macro}{\approx}{#3}%
235 \else
236 \build@ZPK@plot{\plot@macro}{\temp@macro}{\approx}{#3}%
237 \fi
238 \ifpgfarg
239 \edef\temp@cmd{\noexpand\addplot[thick,\opt]}%
240 \temp@cmd {\plot@macro};
241 \else
242 \stepcounter{idGnuplot}%
243 \edef\temp@cmd{\noexpand\addplot[thick,\opt]}
244 \temp@cmd gnuplot[gnuplot degrees,gnuplot def] {\plot@macro};
245 \fi
246 }%
247 }

```

**\addBodeTFPlot** This macro is designed to issues a single `\addplot` macros for the set of coefficients and delay. All of the work is done by the `\build@TF@plot` macro.

```

248 \newcommand{\addBodeTFPlot}[3][thick]{%
249 \gdef\plot@macro{}%

```

```

250 \gdef\temp@macro{%
251 \ifnum\pdfstrcmp{#2}{phase}=0
252 \build@TF@plot{\temp@macro}{\plot@macro}{#3}%
253 \else
254 \build@TF@plot{\plot@macro}{\temp@macro}{#3}%
255 \fi
256 \if@pgfarg
257 \addplot[#1]{\plot@macro};
258 \else
259 \stepcounter{idGnuplot}%
260 \addplot[#1] gnuplot[gnuplot degrees, gnuplot def] {\plot@macro};
261 \fi
262 }

```

**\addBodeComponentPlot** This macro is designed to issue a single **\addplot** macro capable of plotting linear combinations of the basic components described in Section 2.1.1. The only work to do here is to handle the **pgf** package option.

```

263 \newcommand{\addBodeComponentPlot}[2][thick]{%
264 \if@pgfarg
265 \addplot[#1]{#2};
266 \else
267 \stepcounter{idGnuplot}%
268 \addplot[#1] gnuplot[gnuplot degrees,gnuplot def] {#2};
269 \fi
270 }

```

**BodePlot** An environment to host macros that pass parametric functions to **\addplot** macros. Uses the defaults specified in **bodeStyle** to create a shortcut that includes the **tikzpicture** and **semilogaxis** environments.

```

271 \newenvironment{BodePlot}[3][]{%
272 \begin{tikzpicture}
273 \begin{semilogxaxis}[%
274 bodeStyle,
275 xmin={#2},
276 xmax={#3},
277 domain=#2:#3,
278 height=2.5cm,
279 xlabel={Frequency (rad/s)},
280 #1]
281 }{
282 \end{semilogxaxis}
283 \end{tikzpicture}
284 }

```

### 3.4.2 Internal macros

**\add@feature** This is an internal macro to add a basic component (pole, zero, gain, or delay), described using one of the macros in Section 2.1.1 (input **#2**), to a parametric function stored in a global macro (input **#1**). The basic component value (input

#3) is a complex number of the form {re,im}. If the imaginary part is missing, it is assumed to be zero. Implementation made possible by [this StackExchange answer](#).

```

285 \newcommand*{\add@feature}[3]{%
286   \ifcat$\detokenize\expandafter{#1}$%
287     \xdef#1{\unexpanded\expandafter{#1 0+#2}}%
288   \else
289     \xdef#1{\unexpanded\expandafter{#1+#2}}%
290   \fi
291   \foreach \y [count=\n] in #3 {%
292     \xdef#1{\unexpanded\expandafter{#1}{\y}}%
293     \xdef\Last@LoopValue{\n}%
294   }%
295   \ifnum\Last@LoopValue=1%
296     \xdef#1{\unexpanded\expandafter{#1}{0}}%
297   \fi
298 }

```

`\build@ZPK@plot` This is an internal macro to build parametric Bode magnitude and phase plots by concatenating basic component (pole, zero, gain, or delay) macros (Section 2.1.1) to global magnitude and phase macros (inputs #1 and #2). The `\add@feature` macro is used to do the concatenation. The basic component macros are inferred from a `feature/{values}` list, where `feature` is one of `z,p,k`, and `d`, for zeros, poles, gain, and delay, respectively, and `{values}` is a comma separated list of comma separated lists (complex numbers of the form {re,im}). If the imaginary part is missing, it is assumed to be zero.

```

299 \newcommand{\build@ZPK@plot}[4]{%
300   \foreach \feature/\values in {#4} {%
301     \ifnum\pdfstrcmp{\feature}{z}=0
302       \foreach \z in \values {%
303         \ifnum\pdfstrcmp{#3}{linear}=0
304           \add@feature{#2}{\PhZeroLin}{\z}%
305           \add@feature{#1}{\MagZeroLin}{\z}%
306         \else
307           \ifnum\pdfstrcmp{#3}{asymptotic}=0
308             \add@feature{#2}{\PhZeroAsymp}{\z}%
309             \add@feature{#1}{\MagZeroAsymp}{\z}%
310           \else
311             \add@feature{#2}{\PhZero}{\z}%
312             \add@feature{#1}{\MagZero}{\z}%
313           \fi
314         \fi
315       }%
316     \fi
317     \ifnum\pdfstrcmp{\feature}{p}=0
318       \foreach \p in \values {%
319         \ifnum\pdfstrcmp{#3}{linear}=0
320           \add@feature{#2}{\PhPoleLin}{\p}%
321           \add@feature{#1}{\MagPoleLin}{\p}%

```

```

322         \else
323             \ifnum\pdfstrcmp{#3}{asymptotic}=0
324                 \add@feature{#2}{\PhPoleAsymp}{\p}%
325                 \add@feature{#1}{\MagPoleAsymp}{\p}%
326             \else
327                 \add@feature{#2}{\PhPole}{\p}%
328                 \add@feature{#1}{\MagPole}{\p}%
329             \fi
330         \fi
331     }%
332 \fi
333 \ifnum\pdfstrcmp{\feature}{k}=0
334     \ifnum\pdfstrcmp{#3}{linear}=0
335         \add@feature{#2}{\PhKLin}{\values}%
336         \add@feature{#1}{\MagKLin}{\values}%
337     \else
338         \ifnum\pdfstrcmp{#3}{asymptotic}=0
339             \add@feature{#2}{\PhKAsymp}{\values}%
340             \add@feature{#1}{\MagKAsymp}{\values}%
341         \else
342             \add@feature{#2}{\PhK}{\values}%
343             \add@feature{#1}{\MagK}{\values}%
344         \fi
345     \fi
346 \fi
347 \ifnum\pdfstrcmp{\feature}{d}=0
348     \ifnum\pdfstrcmp{#3}{linear}=0
349         \PackageError {bodeplot} {Linear approximation for pure delays is not
350             supported.} {Plot the true Bode plot using 'true' instead of 'linear'.}
351     \else
352         \ifnum\pdfstrcmp{#3}{asymptotic}=0
353             \PackageError {bodeplot} {Asymptotic approximation for pure delays is not
354                 supported.} {Plot the true Bode plot using 'true' instead of 'asymptotic'.}
355         \else
356             \ifdim\values pt < 0pt
357                 \PackageError {bodeplot} {Delay needs to be a positive number.}
358             \fi
359             \add@feature{#2}{\PhDel}{\values}%
360             \add@feature{#1}{\MagDel}{\values}%
361         \fi
362     \fi
363 \fi
364 }%
365 }

```

`\build@TF@plot` This is an internal macro to build parametric Bode magnitude and phase functions by computing the magnitude and the phase given numerator and denominator coefficients and delay (input #3). The functions are assigned to user-supplied global magnitude and phase macros (inputs #1 and #2).

```

366 \newcommand{\buildTF@plot}[3]{%
367   \gdef\num@real{0}%
368   \gdef\num@im{0}%
369   \gdef\den@real{0}%
370   \gdef\den@im{0}%
371   \gdef\loop@delay{0}%
372   \foreach \feature/\values in {#3} {%
373     \ifnum\pdfstrcmp{\feature}{num}=0
374       \foreach \numcoeff [count=\numpow] in \values {%
375         \xdef\num@degree{\numpow}%
376       }%
377       \foreach \numcoeff [count=\numpow] in \values {%
378         \pgfmathtruncatemacro{\currentdegree}{\num@degree-\numpow}%
379         \ifnum\currentdegree = 0
380           \xdef\num@real{\num@real+\numcoeff}%
381         \else
382           \ifodd\currentdegree
383             \xdef\num@im{\num@im+(\numcoeff*(\n@pow{-1}{(\currentdegree-1)/2})*%
384               (\n@pow{t}{\currentdegree}))}%
385           \else
386             \xdef\num@real{\num@real+(\numcoeff*(\n@pow{-1}{(\currentdegree)/2})*%
387               (\n@pow{t}{\currentdegree}))}%
388           \fi
389         \fi
390       }%
391     \fi
392     \ifnum\pdfstrcmp{\feature}{den}=0
393       \foreach \dencoeff [count=\denpow] in \values {%
394         \xdef\den@degree{\denpow}%
395       }%
396       \foreach \dencoeff [count=\denpow] in \values {%
397         \pgfmathtruncatemacro{\currentdegree}{\den@degree-\denpow}%
398         \ifnum\currentdegree = 0
399           \xdef\den@real{\den@real+\dencoeff}%
400         \else
401           \ifodd\currentdegree
402             \xdef\den@im{\den@im+(\dencoeff*(\n@pow{-1}{(\currentdegree-1)/2})*%
403               (\n@pow{t}{\currentdegree}))}%
404           \else
405             \xdef\den@real{\den@real+(\dencoeff*(\n@pow{-1}{(\currentdegree)/2})*%
406               (\n@pow{t}{\currentdegree}))}%
407           \fi
408         \fi
409       }%
410     \fi
411     \ifnum\pdfstrcmp{\feature}{d}=0
412       \xdef\loop@delay{\values}%
413     \fi
414   }%
415   \xdef#2{(\n@mod{atan2((\num@im),(\num@real))-atan2((\den@im),%

```



```

416      (\den@real))+360}{360}-\loop@delay*180*t/pi))}%
417 \xdef#1{(20*log10(sqrt((\n@pow{\num@real}{2})+(\n@pow{\num@im}{2})))-%
418      20*log10(sqrt((\n@pow{\den@real}{2})+(\n@pow{\den@im}{2}))))}%
419 }

```

**\parse@opt** Parses options supplied to the main Bode macros. A for loop over tuples of the form `\obj/\typ/\opt` with a long list of nested if-else statements does the job. The input `\obj` is either `plot`, `axes`, `group` or `approx`, and the corresponding `\opt` are passed to the `\addplot` macro, the `\nextgroupplot` macro, the `groupplot` environment, and the `\build@ZPK@plot` macros, respectively. The input tuples should not contain any macros that need to be passed to respective `pgf` macros unexpanded. If an input tuple needs to contain such a macro, the `\xdef` macros below need to be defined using `\unexpanded\expandafter{\opt}` instead of just `\opt`. For example, the `\parse@N@opt` macro in Section 3.5.2 can pass macros in its arguments, unexpanded, to `pgf` plot macros and environments, which is useful, for example, when the user wishes to add direction arrows to Nyquist plots. I did not think such a use case would be encountered when plotting Bode plots.

```

420 \newcommand{\parse@opt}[1]{%
421   \gdef\optmag@axes{}%
422   \gdef\optph@axes{}%
423   \gdef\optph@plot{}%
424   \gdef\optmag@plot{}%
425   \gdef\opt@group{}%
426   \gdef\opt@approx{}%
427   \gdef\optph@commands{}%
428   \gdef\optmag@commands{}%
429   \gdef\opt@tikz{}%
430   \foreach \obj/\typ/\opt in {#1} {%
431     \ifnum\pdfstrcmp{\obj}{plot}=0
432       \ifnum\pdfstrcmp{\typ}{mag}=0
433         \xdef\optmag@plot{\unexpanded\expandafter{\opt}}%
434       \else
435         \ifnum\pdfstrcmp{\typ}{ph}=0
436           \xdef\optph@plot{\unexpanded\expandafter{\opt}}%
437         \else
438           \xdef\optmag@plot{\unexpanded\expandafter{\opt}}%
439           \xdef\optph@plot{\unexpanded\expandafter{\opt}}%
440         \fi
441       \fi
442     \else
443       \ifnum\pdfstrcmp{\obj}{axes}=0
444         \ifnum\pdfstrcmp{\typ}{mag}=0
445           \xdef\optmag@axes{\unexpanded\expandafter{\opt}}%
446         \else
447           \ifnum\pdfstrcmp{\typ}{ph}=0
448             \xdef\optph@axes{\unexpanded\expandafter{\opt}}%
449           \else
450             \xdef\optmag@axes{\unexpanded\expandafter{\opt}}%
451             \xdef\optph@axes{\unexpanded\expandafter{\opt}}%

```

```

452         \fi
453     \fi
454 \else
455     \ifnum\pdfstrcmp{\obj}{group}=0
456         \xdef\opt@group{\unexpanded\expandafter{\opt}}%
457     \else
458         \ifnum\pdfstrcmp{\obj}{approx}=0
459             \xdef\opt@approx{\unexpanded\expandafter{\opt}}%
460         \else
461             \ifnum\pdfstrcmp{\obj}{commands}=0
462                 \ifnum\pdfstrcmp{\typ}{phase}=0
463                     \xdef\optph@commands{\unexpanded\expandafter{\opt}}%
464                 \else
465                     \xdef\optmag@commands{\unexpanded\expandafter{\opt}}%
466                 \fi
467             \else
468                 \ifnum\pdfstrcmp{\obj}{tikz}=0
469                     \xdef\opt@tikz{\unexpanded\expandafter{\opt}}%
470                 \else
471                     \xdef\optmag@plot{\unexpanded\expandafter{\obj}}%
472                     \xdef\optph@plot{\unexpanded\expandafter{\obj}}%
473                 \fi
474             \fi
475         \fi
476     \fi
477 \fi
478 \fi
479 }%
480 }

```

## 3.5 Nyquist plots

### 3.5.1 User macros

**\NyquistZPK** Converts magnitude and phase parametric functions built using **\build@ZPK@plot** into real part and imaginary part parametric functions. A plot of these is the Nyquist plot. The parametric functions are then plotted in a **tikzpicture** environment using the **\addplot** macro. Unless the package is loaded with the option **pgf**, the parametric functions are evaluated using **gnuplot**. A large number of samples is typically needed to get a smooth plot because frequencies near 0 result in plot points that are very close to each other. Linear frequency sampling is unnecessarily fine near zero and very coarse for large  $\omega$ . Logarithmic sampling makes it worse, perhaps inverse logarithmic sampling will help, pull requests to fix that are welcome!

```

481 \newcommand{\NyquistZPK}[4][]{%
482     \parse@N@opt{#1}%
483     \gdef\func@mag{%
484         \gdef\func@ph{%
485             \build@ZPK@plot{\func@mag}{\func@ph}{#2}%

```

```

486 \edef\temp@cmd{\noexpand\begin{tikzpicture}}[\opt@tikz]\noexpand\begin{axis}[%
487     bodeStyle,
488     domain=#3:#4,
489     height=5cm,
490     xlabel={$\Re$},
491     ylabel={$\Im$},
492     samples=500,
493     \opt@axes,]%
494 \temp@cmd
495 \addplot [only marks,mark=+,thick,red] (-1 , 0);
496 \edef\temp@cmd{\noexpand\addplot[thick,\unexpanded\expandafter{\opt@plot}}]%
497 \ifpgfarg
498 \temp@cmd ( {\n@pow{10}{((\func@mag)/20)}*cos(\func@ph)},
499             {\n@pow{10}{((\func@mag)/20)}*sin(\func@ph)} );
500 \opt@commands;
501 \else
502 \stepcounter{idGnuplot}%
503 \temp@cmd gnuplot[parametric,gnuplot degrees,gnuplot def] {%
504     \n@pow{10}{((\func@mag)/20)}*cos(\func@ph),
505     \n@pow{10}{((\func@mag)/20)}*sin(\func@ph)};
506 \opt@commands;
507 \fi
508 \end{axis}
509 \end{tikzpicture}
510 }

```

**\NyquistTF** Implementation of this macro is very similar to the **\NyquistZPK** macro above. The only difference is a slightly different parsing of the mandatory arguments via **\build@TF@plot**.

```

511 \newcommand{\NyquistTF}[4] [] {%
512     \parse@N@opt{#1}%
513     \gdef\func@mag{}%
514     \gdef\func@ph{}%
515     \build@TF@plot{\func@mag}{\func@ph}{#2}%
516     \edef\temp@cmd{\noexpand\begin{tikzpicture}}[\opt@tikz]\noexpand\begin{axis}[%
517         bodeStyle,
518         domain=#3:#4,
519         height=5cm,
520         xlabel={$\Re$},
521         ylabel={$\Im$},
522         samples=500,
523         \opt@axes,]%
524     \temp@cmd
525     \addplot [only marks,mark=+,thick,red] (-1 , 0);
526     \edef\temp@cmd{\noexpand\addplot[thick,\unexpanded\expandafter{\opt@plot}}]%
527     \ifpgfarg
528     \temp@cmd ( {\n@pow{10}{((\func@mag)/20)}*cos(\func@ph)},
529                 {\n@pow{10}{((\func@mag)/20)}*sin(\func@ph)} );
530     \opt@commands;
531     \else

```

```

532     \stepcounter{idGnuplot}%
533     \temp@cmd gnuplot[parametric,gnuplot degrees,gnuplot def]{%
534         \n@pow{10}{((\func@mag)/20)}*cos(\func@ph),
535         \n@pow{10}{((\func@mag)/20)}*sin(\func@ph)};
536     \opt@commands;
537 \fi
538 \end{axis}
539 \end{tikzpicture}
540 }

```

**\addNyquistZPKPlot** Adds Nyquist plot of a transfer function in ZPK form. This macro is designed to pass two parametric function to an **\addplot** macro. The parametric functions for phase (**\func@ph**) and magnitude (**\func@mag**) are built using the **\build@ZPK@plot** macro, converted to real and imaginary parts and passed to **\addplot** commands.

```

541 \newcommand{\addNyquistZPKPlot}[2][]{%
542     \gdef\func@mag{}%
543     \gdef\func@ph{}%
544     \build@ZPK@plot{\func@mag}{\func@ph}{#2}%
545     \if@pgfarg
546         \addplot [#1] ( {\n@pow{10}{((\func@mag)/20)}*cos(\func@ph)},
547             {\n@pow{10}{((\func@mag)/20)}*sin(\func@ph)} );
548     \else
549         \stepcounter{idGnuplot}%
550         \addplot [#1] gnuplot[parametric,gnuplot degrees,gnuplot def]{%
551             \n@pow{10}{((\func@mag)/20)}*cos(\func@ph),
552             \n@pow{10}{((\func@mag)/20)}*sin(\func@ph)};
553     \fi
554 }

```

**\addNyquistTFPlot** Adds Nyquist plot of a transfer function in TF form. This macro is designed to pass two parametric function to an **\addplot** macro. The parametric functions for phase (**\func@ph**) and magnitude (**\func@mag**) are built using the **\build@TF@plot** macro, converted to real and imaginary parts and passed to **\addplot** commands.

```

555 \newcommand{\addNyquistTFPlot}[2][]{%
556     \gdef\func@mag{}%
557     \gdef\func@ph{}%
558     \build@TF@plot{\func@mag}{\func@ph}{#2}%
559     \if@pgfarg
560         \addplot [#1] ( {\n@pow{10}{((\func@mag)/20)}*cos(\func@ph)},
561             {\n@pow{10}{((\func@mag)/20)}*sin(\func@ph)} );
562     \else
563         \stepcounter{idGnuplot}%
564         \addplot [#1] gnuplot[parametric,gnuplot degrees,gnuplot def]{%
565             \n@pow{10}{((\func@mag)/20)}*cos(\func@ph),
566             \n@pow{10}{((\func@mag)/20)}*sin(\func@ph)};
567     \fi
568 }

```

**NyquistPlot** An environment to host `\addNyquist...` macros that pass parametric functions to `\addplot`. Uses the defaults specified in `bodeStyle` to create a shortcut that includes the `tikzpicture` and `axis` environments.

```

569 \newenvironment{NyquistPlot}[3][]{%
570   \begin{tikzpicture}
571     \begin{axis}[%
572       bodeStyle,
573       height=5cm,
574       domain=#2:#3,
575       xlabel={\Re$},
576       ylabel={\Im$},
577       #1]
578     \addplot [only marks,mark=+,thick,red] (-1 , 0);
579   ]%
580   \end{axis}
581 \end{tikzpicture}
582 }

```

### 3.5.2 Internal commands

**\parse@N@opt** Parses options supplied to the main Nyquist and Nichols macros. A `for` loop over tuples of the form `\obj/\opt`, processed using nested if-else statements does the job. The input `\obj` is either `plot` or `axes`, and the corresponding `\opt` are passed to the `\addplot` macro and the `axis` environment, respectively. If the input tuples contain macros, they are to be passed to respective `pgf` macros unexpanded.

```

583 \newcommand{\parse@N@opt}[1]{%
584   \gdef\opt@axes{}%
585   \gdef\opt@plot{}%
586   \gdef\opt@commands{}%
587   \gdef\opt@tikz{}
588   \foreach \obj/\opt in {#1} {%
589     \ifnum\pdfstrcmp{\obj}{axes}=0
590       \xdef\opt@axes{\unexpanded\expandafter{\opt}}%
591     \else
592       \ifnum\pdfstrcmp{\obj}{plot}=0
593         \xdef\opt@plot{\unexpanded\expandafter{\opt}}%
594       \else
595         \ifnum\pdfstrcmp{\obj}{commands}=0
596           \xdef\opt@commands{\unexpanded\expandafter{\opt}}%
597         \else
598           \ifnum\pdfstrcmp{\obj}{tikz}=0
599             \xdef\opt@tikz{\unexpanded\expandafter{\opt}}%
600           \else
601             \xdef\opt@plot{\unexpanded\expandafter{\obj}}%
602           \fi
603         \fi
604       \fi
605     \fi
606   }%

```

607 }

### 3.6 Nichols charts

`\NicholsZPK` These macros and the `NicholsChart` environment generate Nichols charts, and  
`\NicholsTF` they are implemented similar to their Nyquist counterparts.

```

NicholsChart 608 \newcommand{\NicholsZPK}[4][]{%
\addNicholsZPKChart 609 \parse@N@opt{#1}%
\addNicholsTFChart 610 \gdef\func@mag{}%
611 \gdef\func@ph{}%
612 \build@ZPK@plot{\func@mag}{\func@ph}{#2}%
613 \edef\temp@cmd{\noexpand\begin{tikzpicture}[\opt@tikz]\noexpand\begin{axis}[%
614     bodeStyle,
615     domain=#3:#4,
616     height=5cm,
617     xlabel={Phase (degrees)},
618     ylabel={Gain (dB)},
619     samples=500,
620     \opt@axes]}
621 \temp@cmd
622 \edef\temp@cmd{\noexpand\addplot[thick,\opt@plot]}%
623 \ifpgfarg
624     \temp@cmd ( {\func@ph} , {\func@mag} );
625     \opt@commands;
626 \else
627     \stepcounter{idGnuplot}%
628     \temp@cmd gnuplot[parametric, gnuplot degrees, gnuplot def]
629         { \func@ph , \func@mag };
630     \opt@commands;
631 \fi
632 \end{axis}
633 \end{tikzpicture}
634 }
635 \newcommand{\NicholsTF}[4][]{%
636 \parse@N@opt{#1}%
637 \gdef\func@mag{}%
638 \gdef\func@ph{}%
639 \build@TF@plot{\func@mag}{\func@ph}{#2}%
640 \edef\temp@cmd{\noexpand\begin{tikzpicture}[\opt@tikz]\noexpand\begin{axis}[%
641     bodeStyle,
642     domain=#3:#4,
643     height=5cm,
644     xlabel={Phase (degrees)},
645     ylabel={Gain (dB)},
646     samples=500,
647     \opt@axes]}
648 \temp@cmd
649 \edef\temp@cmd{\noexpand\addplot[thick,\opt@plot]}%
650 \ifpgfarg

```

```

651         \temp@cmd ( {\func@ph} , {\func@mag} );
652         \opt@commands;
653     \else
654         \stepcounter{idGnuplot}%
655         \temp@cmd gnuplot[parametric, gnuplot degrees, gnuplot def]
656         { \func@ph , \func@mag };
657         \opt@commands;
658     \fi
659 \end{axis}
660 \end{tikzpicture}
661 }
662 \newenvironment{NicholsChart}[3][{}]{%
663     \begin{tikzpicture}
664         \begin{axis}[%
665             bodeStyle,
666             domain=#2:#3,
667             height=5cm,
668             ytick distance=20,
669             xtick distance=15,
670             xlabel={Phase (degrees)},
671             ylabel={Gain (dB)},
672             #1]
673     ){
674         \end{axis}
675     \end{tikzpicture}
676 }
677 \newcommand{\addNicholsZPKChart}[2][{}]{%
678     \gdef\func@mag{}%
679     \gdef\func@ph{}%
680     \build@ZPK@plot{\func@mag}{\func@ph}{#2}%
681     \if@pgfarg
682         \addplot [#1] ( {\func@ph} , {\func@mag} );
683     \else
684         \stepcounter{idGnuplot}%
685         \addplot [#1] gnuplot[parametric,gnuplot degrees,gnuplot def]
686         {\func@ph , \func@mag};
687     \fi
688 }
689 \newcommand{\addNicholsTFChart}[2][{}]{%
690     \gdef\func@mag{}%
691     \gdef\func@ph{}%
692     \build@TF@plot{\func@mag}{\func@ph}{#2}%
693     \if@pgfarg
694         \addplot [#1] ( {\func@ph} , {\func@mag} );
695     \else
696         \stepcounter{idGnuplot}%
697         \addplot [#1] gnuplot[gnuplot degrees,gnuplot def]
698         {\func@ph , \func@mag};
699     \fi
700 }

```

# Index

Numbers written in *italic* refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition; numbers in **roman** refer to the code lines where the entry is used.

<b>Symbols</b>	<b>\den@im</b> 370, 402, 415, 418	<b>G</b>
<b>\@pgfargfalse</b> . . . . . 5	<b>\den@real</b> . . . . 369,	<b>\gnuplot_def</b> . . . . . 5
<b>\@pgfargtrue</b> . . . . . 7	399, 405, 416, 418	<b>\gnuplot_degrees</b> . . . 5
	<b>\dencoeff</b> . . . . 393,	
<b>A</b>	396, 399, 402, 405	<b>I</b>
<b>\add@feature</b> <u>285</u> , 304,	<b>\denpow</b> 393, 394, 396, 397	<b>\idGnuplot</b> . . . . . 5
305, 308, 309,		<b>\ifcat</b> . . . . . 286
311, 312, 320,	<b>E</b>	<b>\ifluatex</b> . . . . . 2
321, 324, 325,	environments:	<b>\ifnum</b> . . . . 26, 233,
327, 328, 335,	<b>BoodePlot</b> . . . . . <u>271</u>	251, 295, 301,
336, 339, 340,		303, 307, 317,
342, 343, 359, 360	<b>F</b>	319, 323, 333,
<b>\addBoodeComponentPlot</b>	<b>\func@mag</b> . 147, 149,	334, 338, 347,
. . . . . <u>263</u>	164, 176, 189,	348, 352, 373,
<b>\addBoodeTFPlot</b> . . . . <u>248</u>	191, 206, 218,	379, 392, 398,
<b>\addBoodeZPKPlots</b> . . <u>229</u>	483, 485, 498,	411, 431, 432,
<b>\addNicholsTFChart</b> . <u>608</u>	499, 504, 505,	435, 443, 444,
<b>\addNicholsZPKChart</b> <u>608</u>	513, 515, 528,	447, 455, 458,
<b>\addNyquistTFPlot</b> . <u>555</u>	529, 534, 535,	461, 462, 468,
<b>\addNyquistZPKPlot</b> . <u>541</u>	542, 544, 546,	589, 592, 595, 598
	547, 551, 552,	<b>\ifwindows</b> . . . . . 31
<b>B</b>	556, 558, 560,	<b>\immediate</b> . . . . . 32
<b>BoodePlot</b> (environ-	561, 565, 566,	
ment) . . . . . <u>271</u>	610, 612, 624,	<b>L</b>
<b>\boodeStyle</b> . . . . . <u>35</u>	629, 637, 639,	<b>\Last@LoopValue</b> 293, 295
<b>\BoodeTF</b> . . . . . <u>187</u>	651, 656, 678,	<b>\loop@delay</b> 371, 412, 416
<b>\BoodeZPK</b> . . . . . <u>145</u>	680, 682, 686,	
<b>\build@TF@plot</b> 191,	690, 692, 694, 698	<b>M</b>
252, 254, <u>366</u> ,	<b>\func@ph</b> . . 148, 149,	<b>\MagCSPoles</b> . . . . . <u>90</u>
515, 558, 639, 692	169, 182, 190,	<b>\MagCSPolesAsymp</b> . . <u>90</u>
<b>\build@ZPK@plot</b> 149,	191, 211, 224,	<b>\MagCSPolesLin</b> . . . . <u>90</u>
234, 236, <u>299</u> ,	484, 485, 498,	<b>\MagCSPolesPeak</b> . . . <u>109</u>
485, 544, 612, 680	499, 504, 505,	<b>\MagCSZeros</b> . . . . . <u>90</u>
<b>C</b>	514, 515, 528,	<b>\MagCSZerosAsymp</b> . . <u>90</u>
<b>\circ</b> . 167, 180, 209, 222	529, 534, 535,	<b>\MagCSZerosLin</b> . . . . <u>90</u>
<b>\currentdegree</b> . . . .	543, 544, 546,	<b>\MagCSZerosPeak</b> . . . <u>109</u>
. . . . 378, 379,	547, 551, 552,	<b>\MagDel</b> . . . . . 55, 360
382–384, 386,	557, 558, 560,	<b>\MagK</b> . . . . . <u>49</u> , 343
387, 397, 398,	561, 565, 566,	<b>\MagKAsymp</b> . . . . <u>49</u> , 340
401–403, 405, 406	611, 612, 624,	<b>\MagKLin</b> . . . . . <u>49</u> , 336
<b>D</b>	629, 638, 639,	<b>\MagPole</b> . . . <u>57</u> , 84, 328
<b>\den@degree</b> . . . 394, 397	651, 656, 679,	<b>\MagPoleAsymp</b> <u>57</u> , 86, 325
	680, 682, 686,	<b>\MagPoleLin</b> . <u>57</u> , 85, 321
	691, 692, 694, 698	<b>\MagSOPoles</b> . . . . . 117



\MagSOPolesAsymp .. <u>117</u>	536, 586, 596,	\pgfplotsset .... 24, 35
\MagSOPolesLin .... <u>117</u>	625, 630, 652, 657	\PhCSPoles ..... 90
\MagSOPolesPeak ... <u>135</u>	\opt@group .....	\PhCSPolesAsymp 90, 127
\MagSOZeros ..... <u>117</u>	. 158, 200, 425, 456	\PhCSPolesLin .. <u>90</u> , 124
\MagSOZerosAsymp .. <u>117</u>	\opt@plot .....	\PhCSZeros ..... 90
\MagSOZerosLin .... <u>117</u>	. 496, 526, 585,	\PhCSZerosAsymp ... 90
\MagSOZerosPeak ... <u>135</u>	593, 601, 622, 649	\PhCSZerosLin .... 90
\MagZero ..... 84, 312	\opt@tikz .....	\PhDel ..... 56, 359
\MagZeroAsymp .. 84, 309	. 150, 192, 429,	\PhK ..... 49, 342
\MagZeroLin .... 84, 305	469, 486, 516,	\PhKAsymp .. 49, <u>55</u> , 339
	587, 599, 613, 640	\PhKLin .... 49, <u>55</u> , 335
N	\optmag@axes .....	\PhPole .... <u>57</u> , 87, 327
\n ..... 291, 293	. 162, 174, 204,	\PhPoleAsymp <u>57</u> , 89, 324
\n@mod ..... <u>5</u> , 65, 415	216, 421, 445, 450	\PhPoleLin . <u>57</u> , 88, 320
\n@pow . <u>5</u> , 58–60, 70,	\optmag@commands ..	\PhSOPoles ..... <u>117</u>
71, 73, 74, 76–	.... 165, 177,	\PhSOPolesAsymp ... <u>117</u>
81, 90, 91, 94–	207, 219, 428, 465	\PhSOPolesLin .... <u>117</u>
96, 98, 100, 101,	\optmag@plot .. 163,	\PhSOZeros ..... <u>117</u>
118, 122, 383,	175, 205, 217,	\PhSOZerosAsymp ... <u>117</u>
384, 386, 387,	424, 433, 438, 471	\PhSOZerosLin .... <u>117</u>
402, 403, 405,	\optph@axes .....	\PhZero ..... 84, 311
406, 417, 418,	. 167, 180, 209,	\PhZeroAsymp ... 84, 308
498, 499, 504,	222, 422, 448, 451	\PhZeroLin .... 84, 304
505, 528, 529,	\optph@commands ...	\plot@macro .....
534, 535, 546,	.... 170, 183,	. 231, 234, 236,
547, 551, 552,	212, 225, 427, 463	240, 244, 249,
560, 561, 565, 566	\optph@plot ... 168,	252, 254, 257, 260
\newcounter ..... 16	181, 210, 223,	
\newenvironment ...	423, 436, 439, 472	S
.... 271, 569, 662		\setcounter ..... 17
\NicholsChart ..... 608	P	\stepcounter 172, 178,
\NicholsTF ..... 608	\p ... 318, 320, 321,	214, 220, 242,
\NicholsZPK ..... 608	324, 325, 327, 328	259, 267, 502,
\num@degree ... 375, 378	\parse@N@opt .. 482,	532, 549, 563,
\num@im 368, 383, 415, 417	512, <u>583</u> , 609, 636	627, 654, 684, 696
\num@real .... 367,	\parse@opt 146, 188, <u>420</u>	
380, 386, 415, 417	\pdf@strcmp ..... 3	T
\numcoeff .... 374,	\pdfstrcmp .. <u>1</u> , 233,	\temp@cmd .... 150,
377, 380, 383, 386	251, 301, 303,	159, 163, 164,
\numpow 374, 375, 377, 378	307, 317, 319,	168, 169, 175,
\NyquistPlot ..... <u>569</u>	323, 333, 334,	176, 181, 182,
\NyquistTF ..... <u>511</u>	338, 347, 348,	192, 201, 205,
\NyquistZPK ..... <u>481</u>	352, 373, 392,	206, 210, 211,
	411, 431, 432,	217, 218, 223,
O	435, 443, 444,	224, 239, 240,
\opt@approx 149, 426, 459	447, 455, 458,	243, 244, 486,
\opt@axes . 493, 523,	461, 462, 468,	494, 496, 498,
584, 590, 620, 647	589, 592, 595, 598	503, 516, 524,
\opt@commands .....	\pgfplots@gnuplot@format	526, 528, 533,
. 500, 506, 530,	..... 27	613, 621, 622,

624, 628, 640,	318, 335, 336,	<b>Y</b>
648, 649, 651, 655	339, 340, 342,	<b>\y</b> . . . . . 291, 292
<b>\temp@macro</b> 232, 234,	343, 356, 359,	
236, 250, 252, 254	360, 372, 374,	
<b>V</b>	377, 393, 396, 412	<b>Z</b>
<b>\value</b> . . . . . 26	<b>W</b>	<b>\z</b> . . . 302, 304, 305,
<b>\values</b> . . . 300, 302,	<b>\write</b> . . . . . 32	308, 309, 311, 312

## Change History

v1.0	<b>\BodeZPK</b> : Added Tikz option . . . 18
General: Initial release . . . . . 1	<b>\NyquistTF</b> : Added commands
v1.0.1	and tikz options . . . . . 27
<b>\BodeZPK</b> : Pass arbitrary TikZ	<b>\NyquistZPK</b> : Added commands
commands as options. . . . . 18	and tikz options . . . . . 26
<b>\addBodeZPKPlots</b> : Improved	<b>\addNicholsTFChart</b> : Added
optional argument handling. . 20	commands and tikz options . . 30
v1.0.2	<b>\parse@N@opt</b> : Added commands
<b>gnuplot_degrees</b> : Fixed issue #1 14	and tikz options . . . . . 29
v1.0.3	<b>\parse@opt</b> : Added Tikz option . 25
<b>\BodeTF</b> : Added Tikz option . . . 19	