

<https://github.com/anarkila/DeveloperConsole>

Table of contents

Getting Started	1
Adding and removing commands	1
Default Commands	3
Command list generation	3
Best Practices	3
How does it work?	4
Developer Console settings	4
Getting Console state info	7
TODO	9
Version History	9

Getting Started

1. Drag & Drop DeveloperConsole.prefab into your scene
2. Add [ConsoleCommand] to your methods like below.
3. Play your scene and press toggle console key (default § or ½) to toggle Console on/off.

```
using UnityEngine;

public class ExampleScript : MonoBehaviour {

    [ConsoleCommand("test")]
    public void Test() {
        Debug.Log("calling 'test' from developer console!");
    }

    [ConsoleCommand("test.int")]
    public void TestInt(int i) {
        Debug.Log(string.Format("Calling 'test.int' with value: {0} from Developer Console!", i));
    }
}
```

Adding and removing commands

Developer Console supports static, instance, and Unity Coroutines methods (both public and private). Methods can contain either no parameters or single parameter with following types:

int, float, string, string[], bool, double, char, Vector2, Vector3, Vector4, Quaternion

Multiple parameters are currently not supported. If you try to register command which takes multiple parameters or parameter type that is not supported, Developer Console will log warning (Editor only) and the command will not be registered.

<https://github.com/anarkila/DeveloperConsole>

Registering new commands

You can register new commands in two ways.

- 1) Add [ConsoleCommand("command.name")] attribute to your methods like above example.
- 2) Register new command with Console.RegisterCommand() method like below (see notes below!).

- Console.RegisterCommand parameters:
 - o Script reference (MonoBehaviour)
 - o Method name (string)
 - o Command name (string)

Overloads:

- o default value (string) (default "")
 - would show as "{command} {default value}", example: "test.int 42"
- o debugCommandOnly (bool) (default false)
 - if set to true command will only register in Editor and Development build
- o isHiddenCommand (bool) (default false)
 - if set to true would not show in predictions
- o hiddenCommandMinimalGUI (bool) (default false)
 - if set to true would not show in predictions (Minimal GUI only)

```
using UnityEngine;

public class Example : MonoBehaviour {

    private void Start() {
        Console.RegisterCommand(this, "ExampleRegister", "example.register");
    }

    public void ExampleRegister() {
        Debug.Log("Example Register called!");
    }

}
```

Notes:

Instantiated objects with MonoBehaviour script(s) that use [ConsoleCommand()] attribute(s) will not be registered. In that case use Console.RegisterCommand() and Console.RemoveCommand instead.

Use [ConsoleCommand()] attribute for all scripts that do not inherit from MonoBehaviour as Console.RegisterCommand() does not support non-MonoBehaviour command registering!

Multiple instances of same command is allowed, like in the example scenes all 3 cubes are disabled/enabled when command 'cube.enabled (bool)' is called, but same command but in different class or method is not allowed. If same command is found in different class or method, Developer Console logs a warning (Editor only) and that command is ignored.

Removing commands

To remove any command during runtime, you can call Console.RemoveCommand() method. Just provide command name into the method and command will be removed if it exists. Additionally, you can log whether command was found and was removed successfully (Editor only).

<https://github.com/anarkila/DeveloperConsole>

- Console.RegisterCommand parameters:
 - o Command to remove (string)
 - o Log to console (bool)

```
using UnityEngine;

public class Example : MonoBehaviour {

    private void Start() {
        Console.RemoveCommand("quit");

        // with log
        //Console.RemoveCommand("quit", true);
    }
}
```

Note:

If Console.RemoveCommand() is called before Console is fully initialized, they will be removed after console is initialized.

Default Commands

Developer Console comes with few commands by default. If you wish to change, modify or delete them you can find them in *DefaultCommands.cs* and *DebugRenderInfo.cs* classes.

- 'help' - Print list of available commands
- 'quit' – Quit the application
- 'Close' – Close console
- 'clear' – clear all Console messages
- 'reset' – Reset Console window position and size (Large GUI only)
- 'console.style' – Toggle GUI between Large and Minimal
- 'scene.loadbyindex (int)' – Load scene asynchronously by scene build index
- 'scene.loadbyname (string)' - Load scene asynchronously by scene name
- 'max_fps (int)' – Set [Application.TargetFrameRate](#)

Editor only:

- 'debug.renderinfo' – Print rendering information: High and Avg FPS, highest draw call, batches, triangle and vertices count.

Command list generation

To generate text file that contains all commands, open Tools/Developer console and click 'Generate Command List' or click 'Generate Command List' button on ConsoleInitializer.cs inspector.

Text file will be generated to YOUR_PATH/DeveloperConsole/Editor/ folder.

Best Practices

Performance

For the best performance, prefer static class commands over MonoBehaviour instance commands.

<https://github.com/anarkila/DeveloperConsole>

This is because registering static class commands can be done in the background (except in WebGL build). Static commands are also cached on first scene load, so they only need to be registered once.

Additive scene loading

If your game relies on additive scene loading or unloading, consider enabling *'Register Static Command Attributes Only'* setting and use static class commands only. Currently all MonoBehaviour commands are registered again if scene is loaded.

How does it work?

ConsoleInitializer.cs (attached to DeveloperConsole prefab root gameobject) *Awake()* function calls ConsoleManager.cs initialization method. After this ConsoleManager.cs handles everything.

Every time new scene is loaded, ConsoleManager.cs handles looking for all [ConsoleCommand()] attributes in the C# CurrentDomain Assembly. This work happens in two parts.

- 1) First part runs in the background (unless it's WebGL build), meaning this part should not slow down your game in any way. In this part all [ConsoleCommand()] attributes are found and all static commands are registered and cached.
- 2) Second part of the attribute registration does run in Unity main thread. This part only register MonoBehaviour commands and this done by looking for all the different MonoBehaviour scripts that have [ConsoleCommand()] attributes. This is done to get MonoBehaviour class instance references, otherwise calling class instance methods is not possible (as far as I know).

After all commands has been registered, final command lists are built, and all subscribers are notified that console has been fully initialized. If setting *'Print Debug Info'* is enabled and build is Debug (Editor or Development build) then initialization times are printed to console and it should look something like this:

Console Initialized. Threaded work took: 1273.1 ms and non-threaded work took: 1.1 ms.


Where threaded work time means first part and non-threaded work means second part of the attribute registration process.

After commands has been registered, only script that runs every frame is ConsoleKeyInputs.cs which handles all Developer Console keyinputs.

Developer Console settings

Developer Console comes with few settings you can tweak. To change settings, modify DeveloperConsoleInitializer.cs in the inspector which is attached to DeveloperConsole prefab gameobject. Some settings can be changed during runtime through static Console.cs class.

<https://github.com/anarkila/DeveloperConsole>

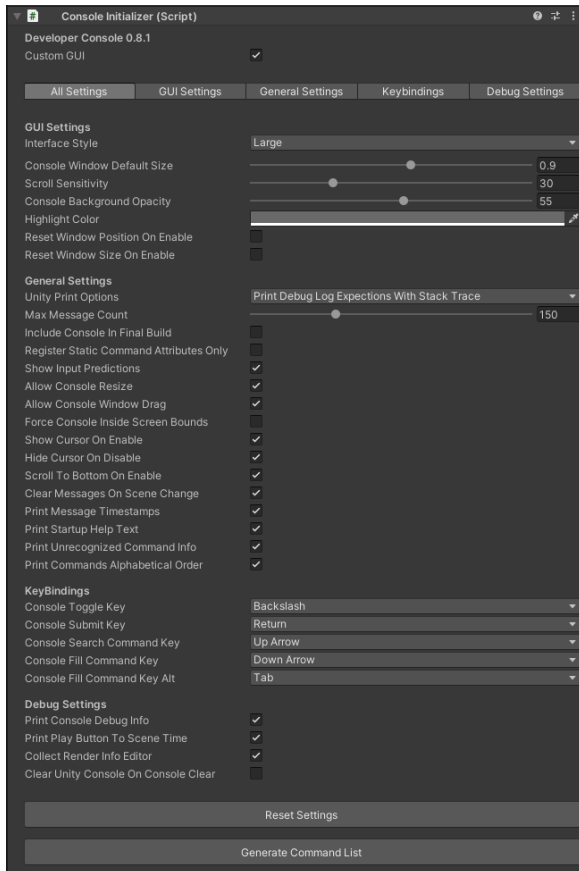

Custom GUI: Whether to use custom GUI (tabs) or render default inspector view (default true)

GUI settings

Interface style: Modify GUI style, Large / Minimal (Default Large)

Console Window Default Size: Developer Console default window size multiplier (Applies to Large GUI only) (Default 0.9)

Scroll Sensitivity: Developer Console scroll sensitivity (Default: 30)

Console Background Opacity: Developer Console message area background opacity (Applies to Large GUI only) (Default 55)

highlightColor: Developer Console hover and click highlight color (Applies to Large GUI only)

Reset Window Position On Enable: Whether to reset window position when console is opened (Applies to large GUI only) (Default false)

Reset Window Size On Enable: Whether to reset window size when console is opened (Applies to large GUI only) (Default false)

General settings

Print options (applies to Large GUI only):

- **Don't print debug logs:**
 - o Don't print any Unity Debug.Log/LogError messages into Developer Console
- **Print Debug logs with expectations Editor only:**

<https://github.com/anarkila/DeveloperConsole>

- Print Debug.Log/LogError messages into Developer Console window with all expectations but only in Editor.
- **Print Debug Logs Expectations With Stack Trace Editor Only**
 - Print Debug.Log/LogError messages into Developer Console window with all expectations and stack traces but only in Editor. Stack traces will print detailed error logs with script names and all.
- **Print Debug Logs Without Expectations**
 - Print Debug.Log/LogError messages into Developer Console window with all expectations (Editor and Build)
- **Print Debug Logs Without Expectations With Stack Trace (Default)**
 - Print Debug.Log/LogError messages into Developer Console window with all expectations and stack traces (Editor and Build). Stack traces will print detailed error logs with script names and all.

Max Message count: How many messages will be shown in the Developer Console window (Large GUI only) before messages will start to recycle from the beginning (Default 150)

Include Console In Final Build: Whether to include Developer Console in final release build. Be careful whether you can actually want to include in final release build! Console is still included in Development builds. (Default false)

Register Static Command Attributes Only: Whether to register static commands only with [ConsoleCommand()] attributes and ignore all other [ConsoleCommand()] attributes. To still register MonoBehaviour commands, use Console.RegisterCommand() method when this setting is set to true. (Default false)

Show Input Predictions: Whether to show inputfield predictions (Default true)

Allow Console Resize: Allow Console to be resized (Applies to large GUI only) (Default true)

Allow Console Window Drag: Allow Console to be dragged (Applies to large GUI only) (Default true)

Force Console Inside Screen Bounds: Whether to force Console to be inside screen bounds when dragging and resizing console. If set to false and console was moved outside screen bounds, Console position and size will reset next time console is opened. (Applies to large GUI only) (Default false)

Show Cursor On Enable: Whether to force cursor on when Console is opened. (Default true)

Hide Cursor On Disable: Whether to force cursor off when Console is closed. (Default true)

Scroll to bottom On Enable: Whether to scroll bottom when console is opened (Default true)

Clear Messages On Scene Change: Whether clear all console messages when scene is changed (Default true)

Print Message Timestamps: Whether to print message timestamp (Applies Large GUI only) (Default true)

Print Startup Help Text: Whether to show print *'type help and press enter to..'* text on startup. (Default true)

Print Unrecognized Command Info: Whether to print unrecognized command info to console: "Command [command name] was not recognized." (Default true)

Print Commands Alphabetical Order: Whether to print commands in alphabetical order when command 'help' is called (Default true)

<https://github.com/anarkila/DeveloperConsole>

Key Bindings

Console Toggle key: Keycode which activates/deactivates Developer Console

Console Submit key: Keycode which submits command

Console Search Command key: Keycode which searches previously (successfully) executed command

Console Fill Command key: Keycode which fills command from prediction

Console Fill Command alt key: Alternative/second keycode which fills command from prediction

Debug Settings

Print Console Debug Info: Whether to print Console debug info like Initialization time (Editor and Debug builds only) (Default true)

Print Play Button To Scene Time: Whether to print play button click to playable scene time (Default true)

Collect Render Info Editor: Whether to collect Unity rendering information such as highest draw call / batches count. This can be printed to console with command: `debug.print.renderinfo` This happens in `DebugRenderInfo.cs` class (Default true)

Clear Unity Console On Console Clear: Whether to Clear Unity console messages too when Developer Console 'clear' event called (Editor only) (Default false)

Getting Console state info

Developer Console provides simple static API you can call everywhere to interact with console. This is intended if you wish to change Console settings runtime or to know console state.

If you need to know when Developer Console is opened or closed (for turning scripts on/off for example), you can do it two ways.

- 1) Register to console event like below. Just remember to unregister your event either in `OnDisable` or `OnDestroy`.

```
using UnityEngine;

public class Example : MonoBehaviour {

    private void OnEnable() {
        Console.RegisterConsoleStateChangeEvent += Callback;
    }

    private void OnDisable() {
        Console.RegisterConsoleStateChangeEvent -= Callback;
    }

    private void Callback(bool enabled) {
        Debug.Log("Console is open: " + enabled);
    }
}
```

<https://github.com/anarkila/DeveloperConsole>

- 2) If you want to check Developer Console state in Update() function.

```
using UnityEngine;

public class Example : MonoBehaviour {

    private void Update() {
        if (Console.IsConsoleOpen()) {
            return;
        }

        // Else do your work..
    }
}
```


<https://github.com/anarkila/DeveloperConsole>

TODO

- Explore ways to have multiple parameters
- Explore ways to register commands faster
- Improve both GUI's
- Improve GUI resizing
- Ability to register commands in Editor
- Ability to generate grid or list of buttons that can fire commands
- Support for no Domain/Scene reload
- Ability to add command info
- Additive scene load/unload handling

Version History

v 0.8.1

- Fixed issue where calling coroutine which no longer existed in the scene resulted in error
- Fixed issue where coroutine was started when gameobject was inactive
- Fixed issue where multiple DeveloperConsole prefabs where open at the same time
- Fixed issue where in editor DeveloperConsole would throw NullReferenceException if scene was entered and exited before console was initialized
- Renamed namespace to avoid any conflicts with other assets
- Prediction panel texts are now buttons and can now be clicked. Clicking prediction text will input that text into console inputfield
- Minor GUI improvements
- Minor performance improvements
- Made tabbed Inspector GUI for ConsoleInitializer.cs
- New settings:
 - o highlight color
 - o Setting for printing console commands in alphabetical order

v 0.8.0

Initial release