


Nama : Muhammad Thoriq Ramadhan

Kelas : FWD 1


Materi GitHub

Hasil :



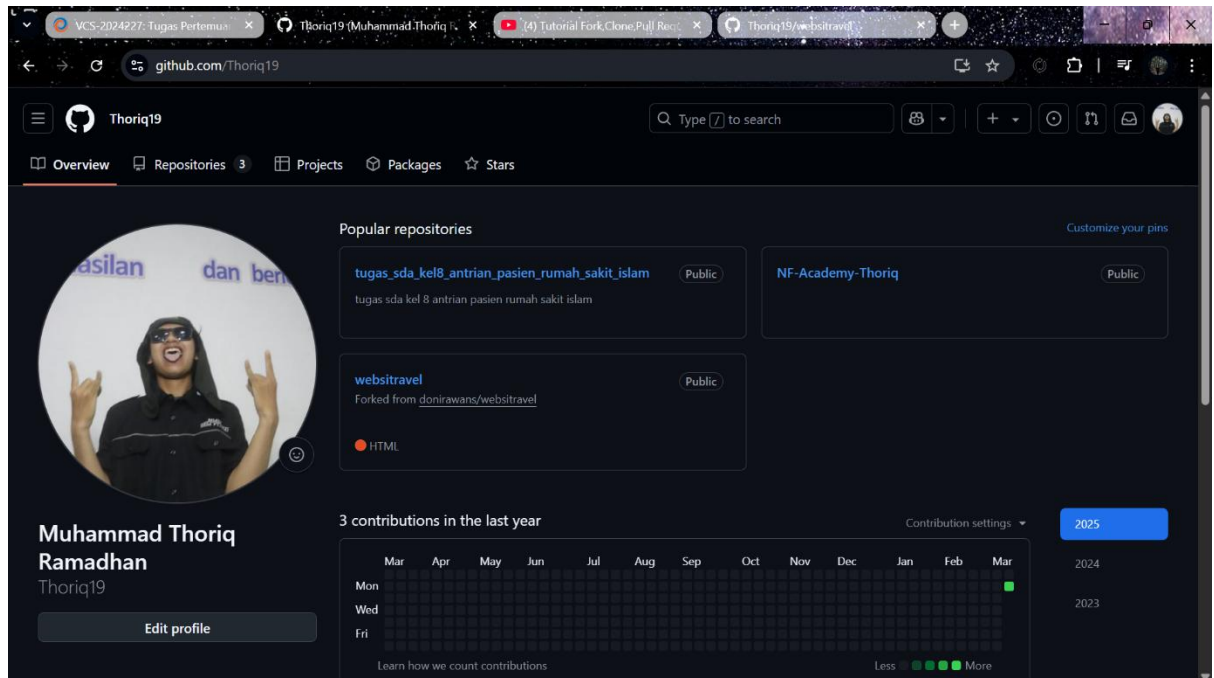

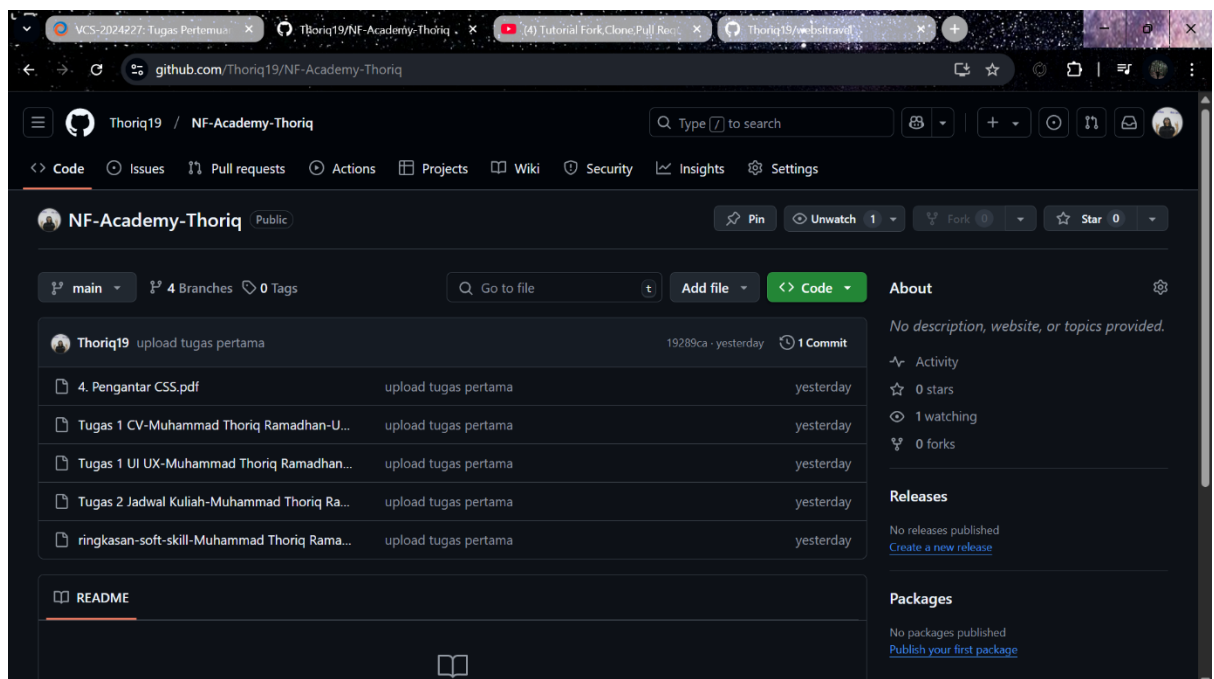

1. Akun GitHub :




2. Repository Public :



3. File Upload :


	Thoriq19	upload tugas pertama	19289ca · yesterday	🕒 1 Commit
	4. Pengantar CSS.pdf	upload tugas pertama	yesterday	
	Tugas 1 CV-Muhammad Thoriq Ramadhan-U...	upload tugas pertama	yesterday	
	Tugas 1 UI UX-Muhammad Thoriq Ramadhan...	upload tugas pertama	yesterday	
	Tugas 2 Jadwal Kuliah-Muhammad Thoriq Ra...	upload tugas pertama	yesterday	
	ringkasan-soft-skill-Muhammad Thoriq Rama...	upload tugas pertama	yesterday	

4. 3 branch yang sudah dibuat :

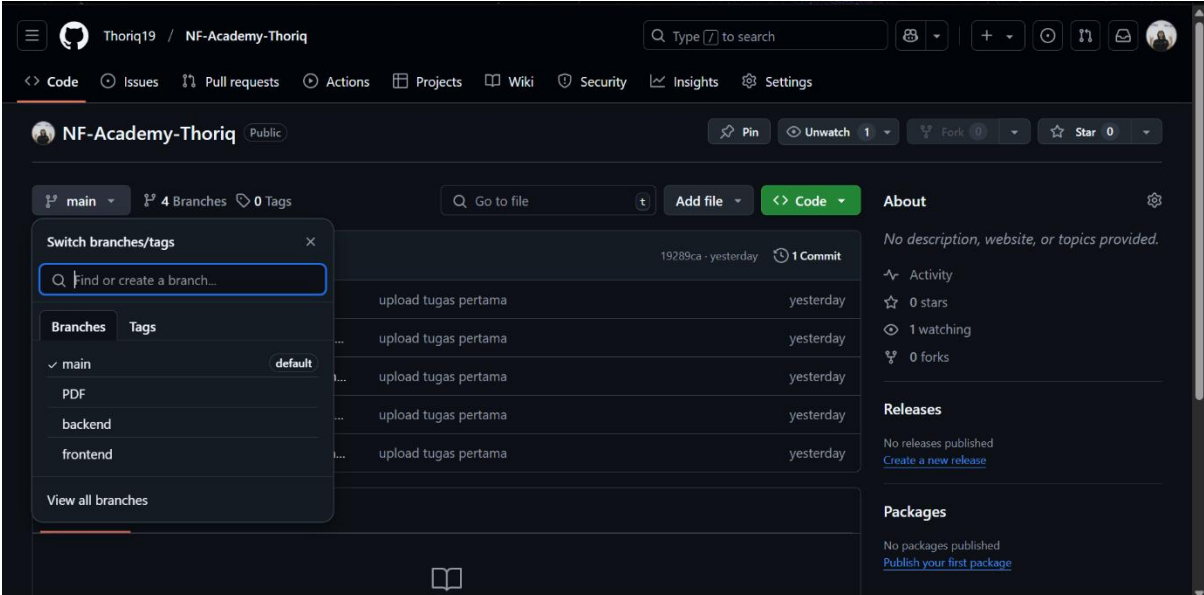

The screenshot shows the GitHub interface for the repository 'NF-Academy-Thoriq'. A 'Switch branches/tags' dropdown menu is open, displaying a search bar and a list of branches: 'main' (selected and marked as default), 'PDF', 'backend', and 'frontend'. The background shows the repository's file list with several 'upload tugas pertama' files and the 'About' section on the right.

5. Forking :

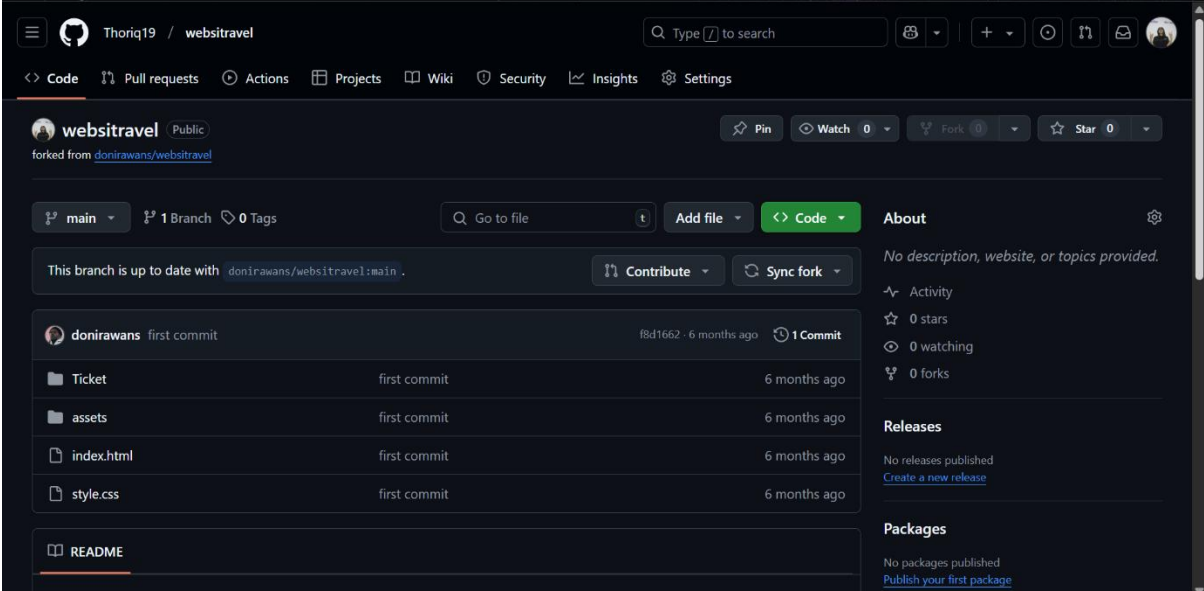

The screenshot shows the GitHub interface for the repository 'websitravel', which is a fork of 'donirawans/websitravel'. The interface indicates that the fork is up to date with the parent repository. The file list shows a 'first commit' with files: 'Ticket', 'assets', 'index.html', and 'style.css'. The 'About' section on the right provides additional repository details.

- Code git :

```

MINGW64/d/NF Academy/PDF
thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git branch
* main

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git branch PDF && git branch frontend && git branch backend

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git branch
PDF
  backend
  frontend
* main

```

```

MINGW64/d/NF Academy/PDF
thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git checkout PDF
Switched to branch 'PDF'

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git add .

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git push
fatal: The current branch PDF has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin PDF

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git push --set-upstream origin PDF
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'PDF' on GitHub by visiting:
remote:   https://github.com/Thoriq19/NF-Academy-Thoriq/pull/new/PDF
remote:
To https://github.com/Thoriq19/NF-Academy-Thoriq.git
 * [new branch] PDF -> PDF
branch 'PDF' set up to track 'origin/PDF'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git checkout frontend
Switched to branch 'frontend'

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git add .

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git push
fatal: The current branch frontend has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin frontend

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

```

```

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git push --set-upstream origin frontend
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'frontend' on GitHub by visiting:
remote:   https://github.com/Thoriq19/NF-Academy-Thoriq/pull/new/frontend
remote:
To https://github.com/Thoriq19/NF-Academy-Thoriq.git
 * [new branch] frontend -> frontend
branch 'frontend' set up to track 'origin/frontend'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git checkout backend
Switched to branch 'backend'

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (backend)
$ git add .

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (backend)
$ git push --set-upstream origin backend
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'backend' on GitHub by visiting:
remote:   https://github.com/Thoriq19/NF-Academy-Thoriq/pull/new/backend
remote:
To https://github.com/Thoriq19/NF-Academy-Thoriq.git
 * [new branch] backend -> backend
branch 'backend' set up to track 'origin/backend'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (backend)
$

```

Link : <https://github.com/Thoriq19>