


Nama : Muhammad Thoriq Ramadhan

Kelas : FWD 1


Materi GitHub

Hasil :



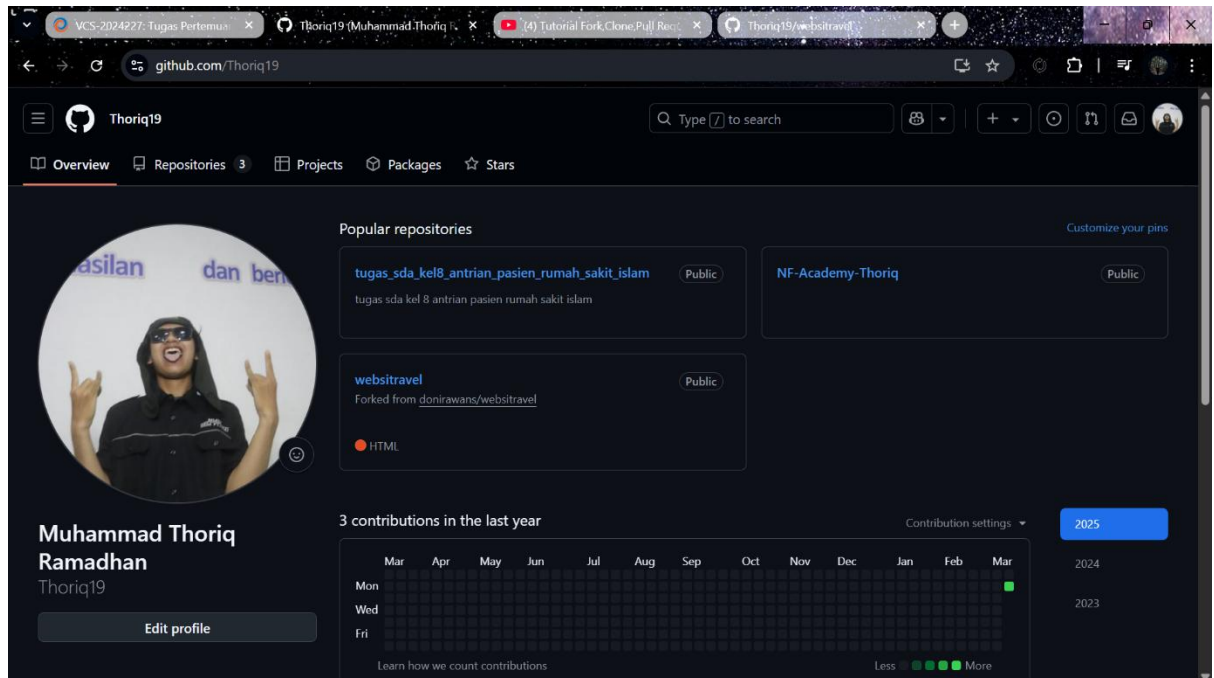

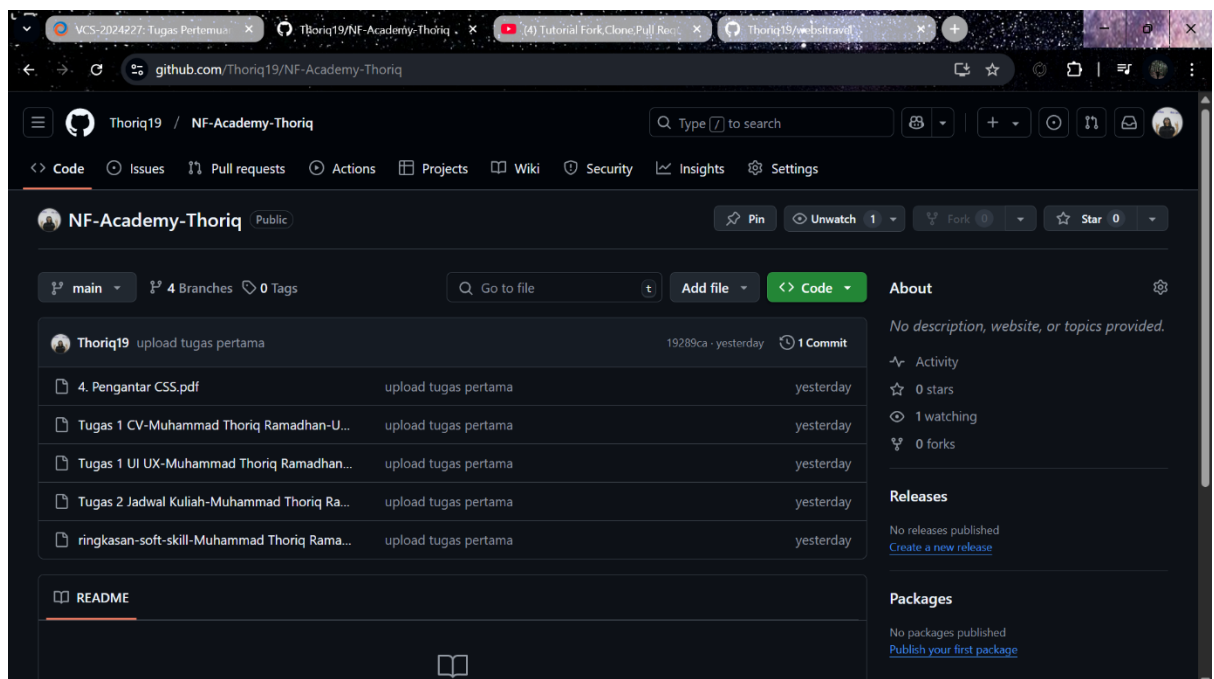

## 1. Akun GitHub :




## 2. Repository Public :



### 3. File Upload :


	Thoriq19	upload tugas pertama	19289ca · yesterday	🕒 1 Commit
	4. Pengantar CSS.pdf	upload tugas pertama	yesterday	
	Tugas 1 CV-Muhammad Thoriq Ramadhan-U...	upload tugas pertama	yesterday	
	Tugas 1 UI UX-Muhammad Thoriq Ramadhan...	upload tugas pertama	yesterday	
	Tugas 2 Jadwal Kuliah-Muhammad Thoriq Ra...	upload tugas pertama	yesterday	
	ringkasan-soft-skill-Muhammad Thoriq Rama...	upload tugas pertama	yesterday	

### 4. 3 branch yang sudah dibuat :

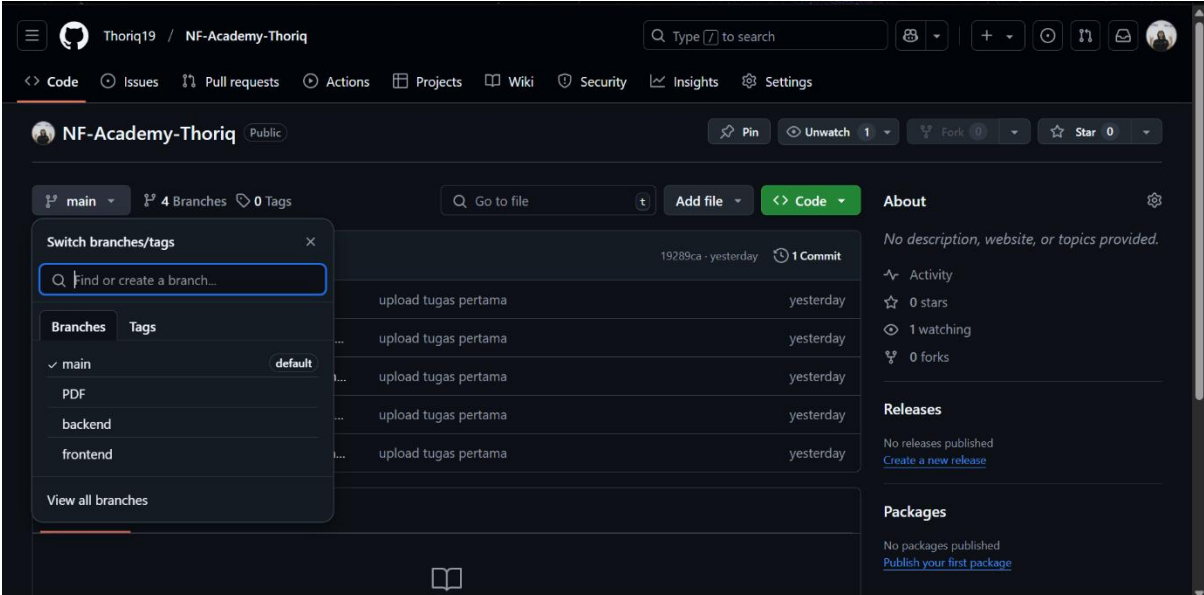

The screenshot shows the GitHub interface for the repository 'NF-Academy-Thoriq'. A 'Switch branches/tags' dropdown menu is open, displaying a search bar and a list of branches: 'main' (selected and marked as default), 'PDF', 'backend', and 'frontend'. The background shows the repository's commit history with multiple 'upload tugas pertama' commits from 'yesterday'.

### 5. Forking :

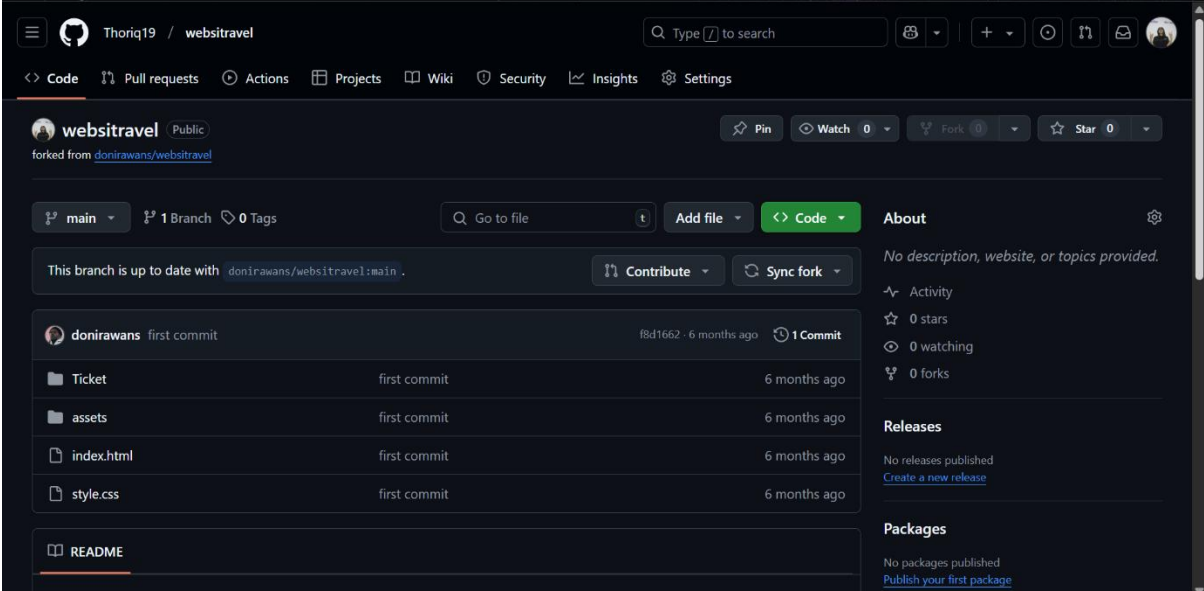

The screenshot shows the GitHub interface for the repository 'websitravel', which is a fork of 'donirawans/websitravel'. The interface indicates it is up to date with the parent repository. The commit history shows a 'first commit' by 'donirawans' 6 months ago, with files 'Ticket', 'assets', 'index.html', and 'style.css'. The README section is partially visible at the bottom.

- Code git :

```
MINGW64/d/NF Academy/PDF
thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git branch
* main

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git branch PDF && git branch frontend && git branch backend

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git branch
PDF
backend
frontend
* main
```

```
MINGW64/d/NF Academy/PDF
thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (main)
$ git checkout PDF
Switched to branch 'PDF'

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git add .

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git push
fatal: The current branch PDF has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin PDF

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git push --set-upstream origin PDF
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'PDF' on GitHub by visiting:
remote:   https://github.com/Thoriq19/NF-Academy-Thoriq/pull/new/PDF
remote:
To https://github.com/Thoriq19/NF-Academy-Thoriq.git
 * [new branch] PDF -> PDF
branch 'PDF' set up to track 'origin/PDF'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (PDF)
$ git checkout frontend
Switched to branch 'frontend'

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git add .

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git push
fatal: The current branch frontend has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin frontend

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.
```

```
thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git push --set-upstream origin frontend
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'frontend' on GitHub by visiting:
remote:   https://github.com/Thoriq19/NF-Academy-Thoriq/pull/new/frontend
remote:
To https://github.com/Thoriq19/NF-Academy-Thoriq.git
 * [new branch] frontend -> frontend
branch 'frontend' set up to track 'origin/frontend'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (frontend)
$ git checkout backend
Switched to branch 'backend'

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (backend)
$ git add .

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (backend)
$ git push --set-upstream origin backend
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'backend' on GitHub by visiting:
remote:   https://github.com/Thoriq19/NF-Academy-Thoriq/pull/new/backend
remote:
To https://github.com/Thoriq19/NF-Academy-Thoriq.git
 * [new branch] backend -> backend
branch 'backend' set up to track 'origin/backend'.

thori@Teh-Kotak MINGW64 /d/NF Academy/PDF (backend)
$
```